

PRELIMINARY MANUAL

D820X

2CH-DIGITAL-RECORDER

VOLUME III

SERVICING

TABLE OF CONTENTS D820X VOLUME III


ASSEMBLY LOCATION	PAGE 2
INTERCONNECTION	PAGE 3
CONNECTOR LOCATION	PAGE 6
MENUE STRUCTURE	PAGE 9
D820X: SIGNAL DESCRIPTION	SECTION 1
SYSCON MONITOR	SECTION 2
COMMANDS SYSCON-HARDWARE	SECTION 3
MASTER MONITOR	SECTION 4
SIGNAL WIRE LIST	SECTION 5

VOLUME I OPERATING	Order No. 10.27.0580
VOLUME II DIAGRAMS	Order No. 10.27.0590
DOS-DISK (not yet available)	Order No. 10.27.0620
VOLUME I and VOLUME II and VOLUME III	Order No. 10.27.0610


Prepared and edited by
 STUDER REVUX
 TECHNICAL DOCUMENTATION
 Althardstrasse 10
 CH-8105 Regensdorf-Zürich
 Copyright by Willi Studer AG
 Printed in Switzerland, Order no. 10.27.0600 (Ed. 1186)

STUDER is a registered trade mark of
 STUDER INTERNATIONAL AG Regensdorf


ASSEMBLY LOCATION

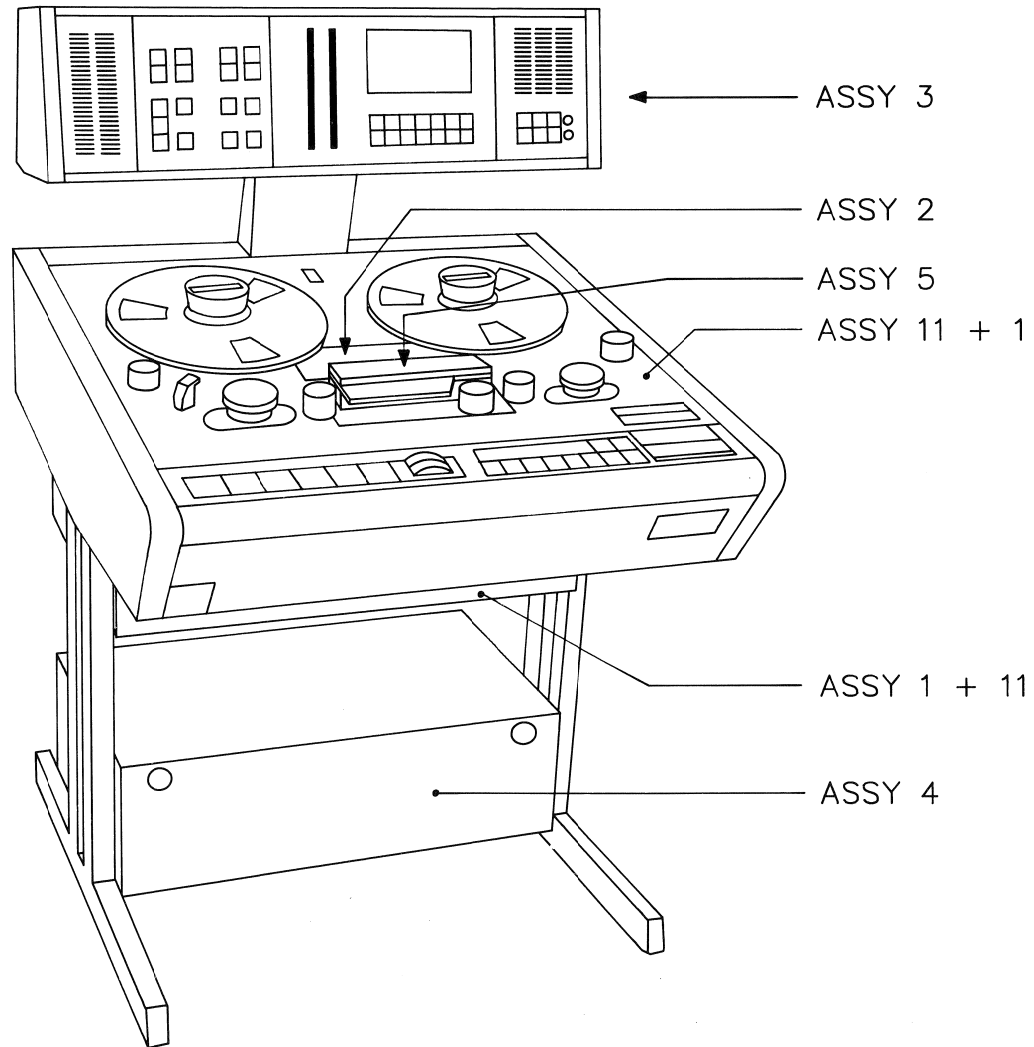


INTERCONNECTION

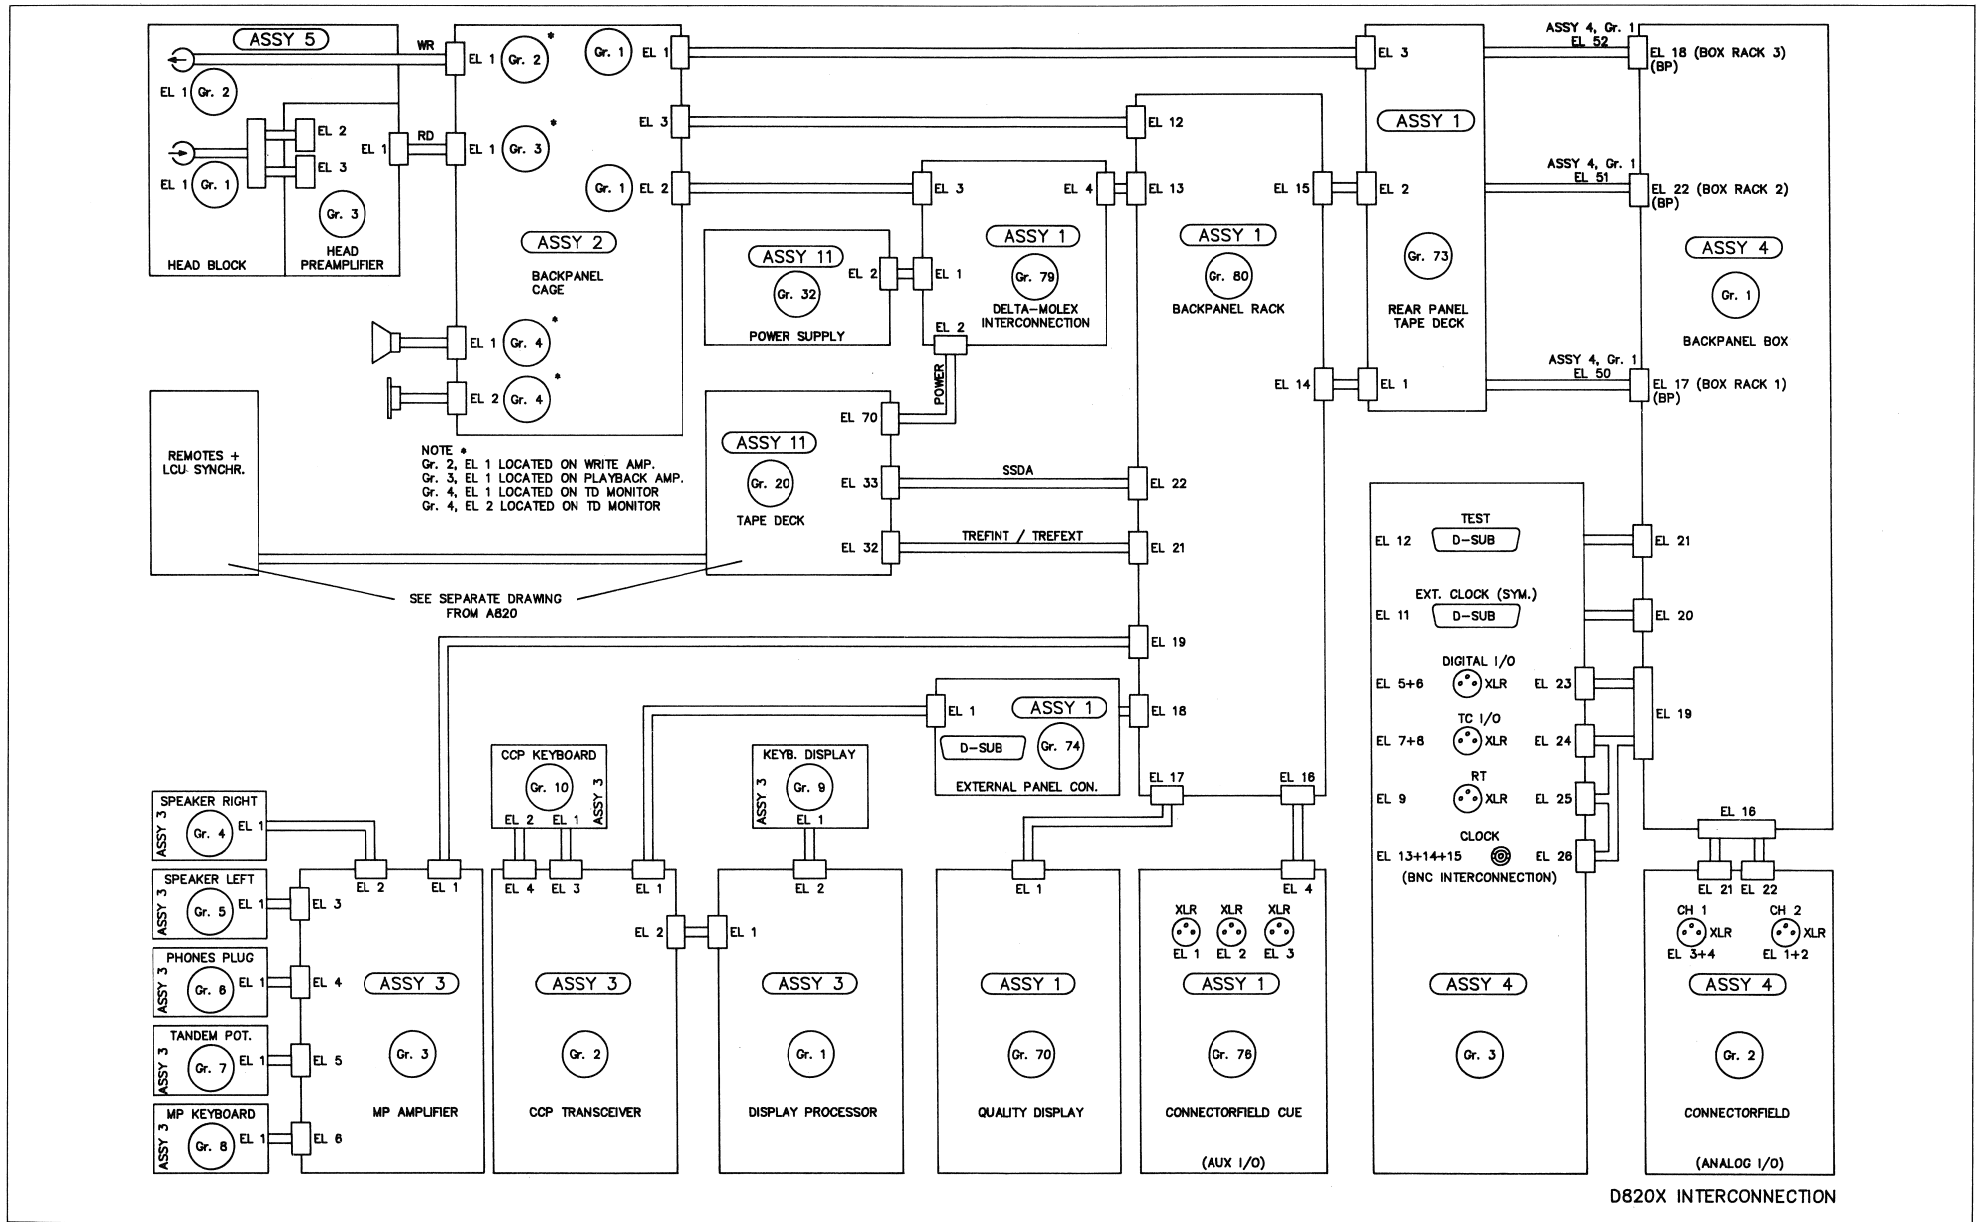


INTERCONNECTION (ALL 1.820.XX = ASSY 11)

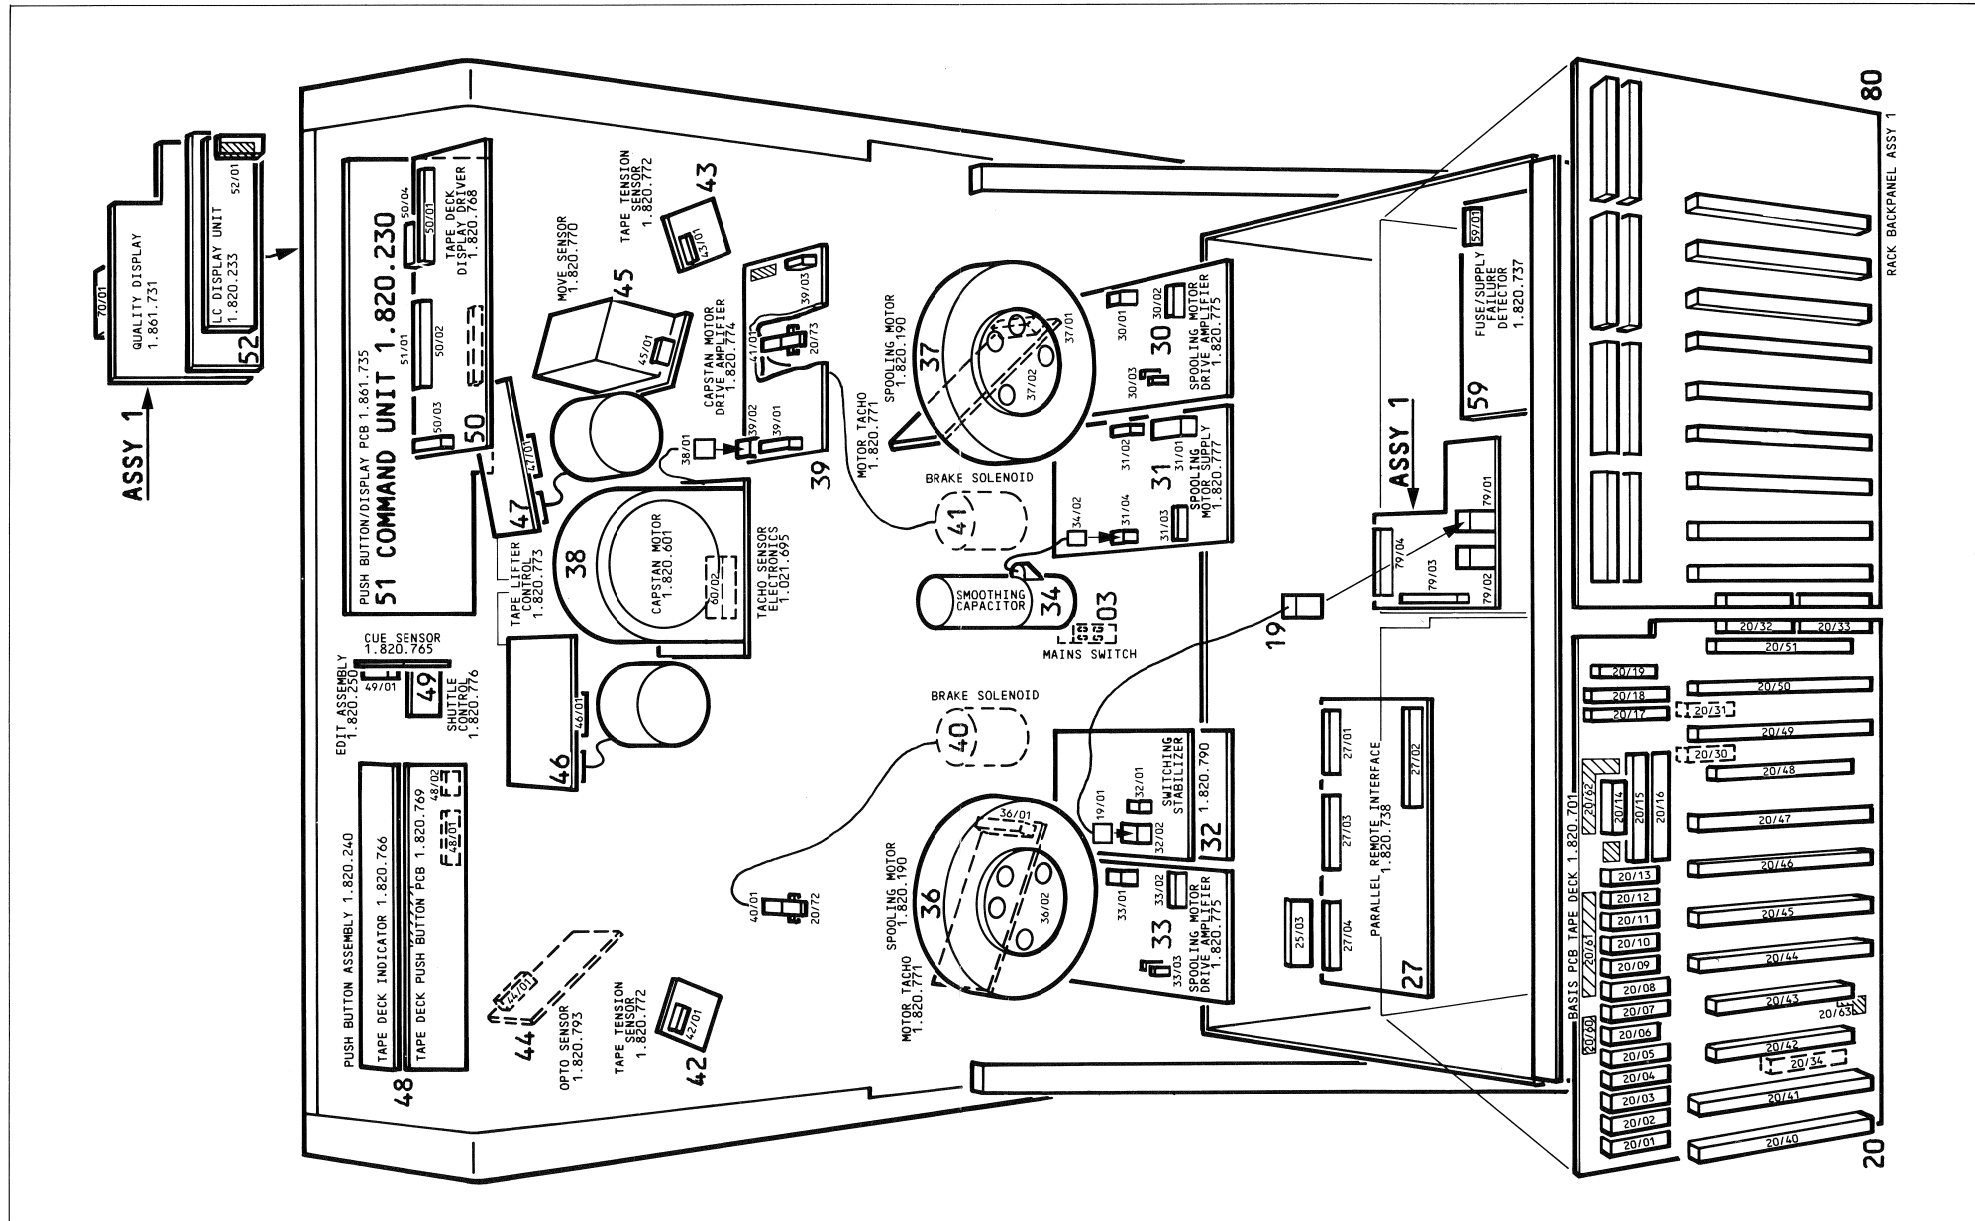


INTERCONNECTION (ALL 1.820.XX = ASSY 11)

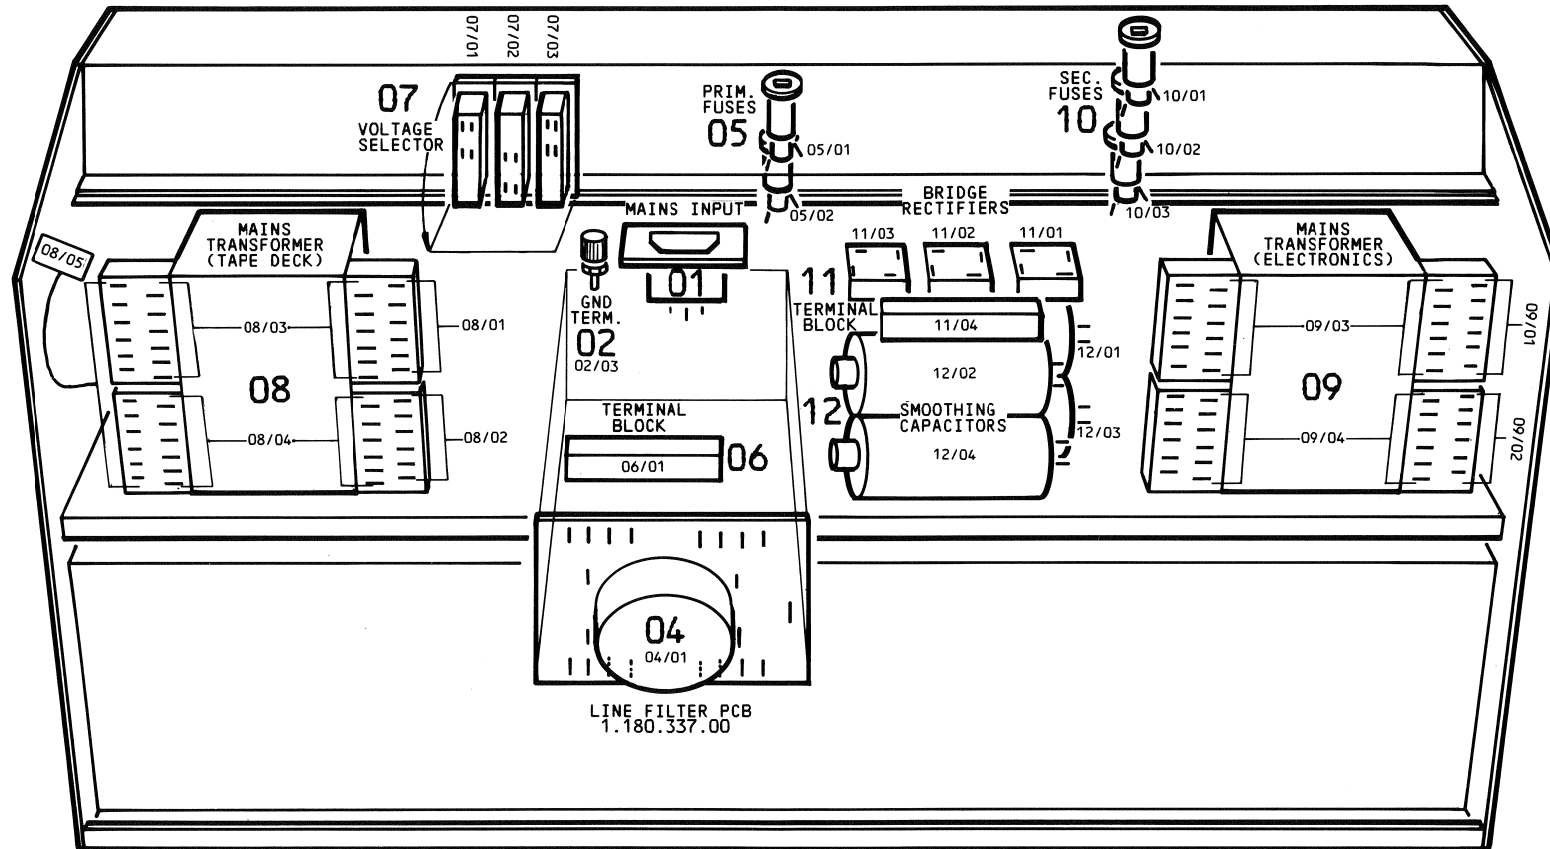


CONNECTOR LOCATION PAGE 1

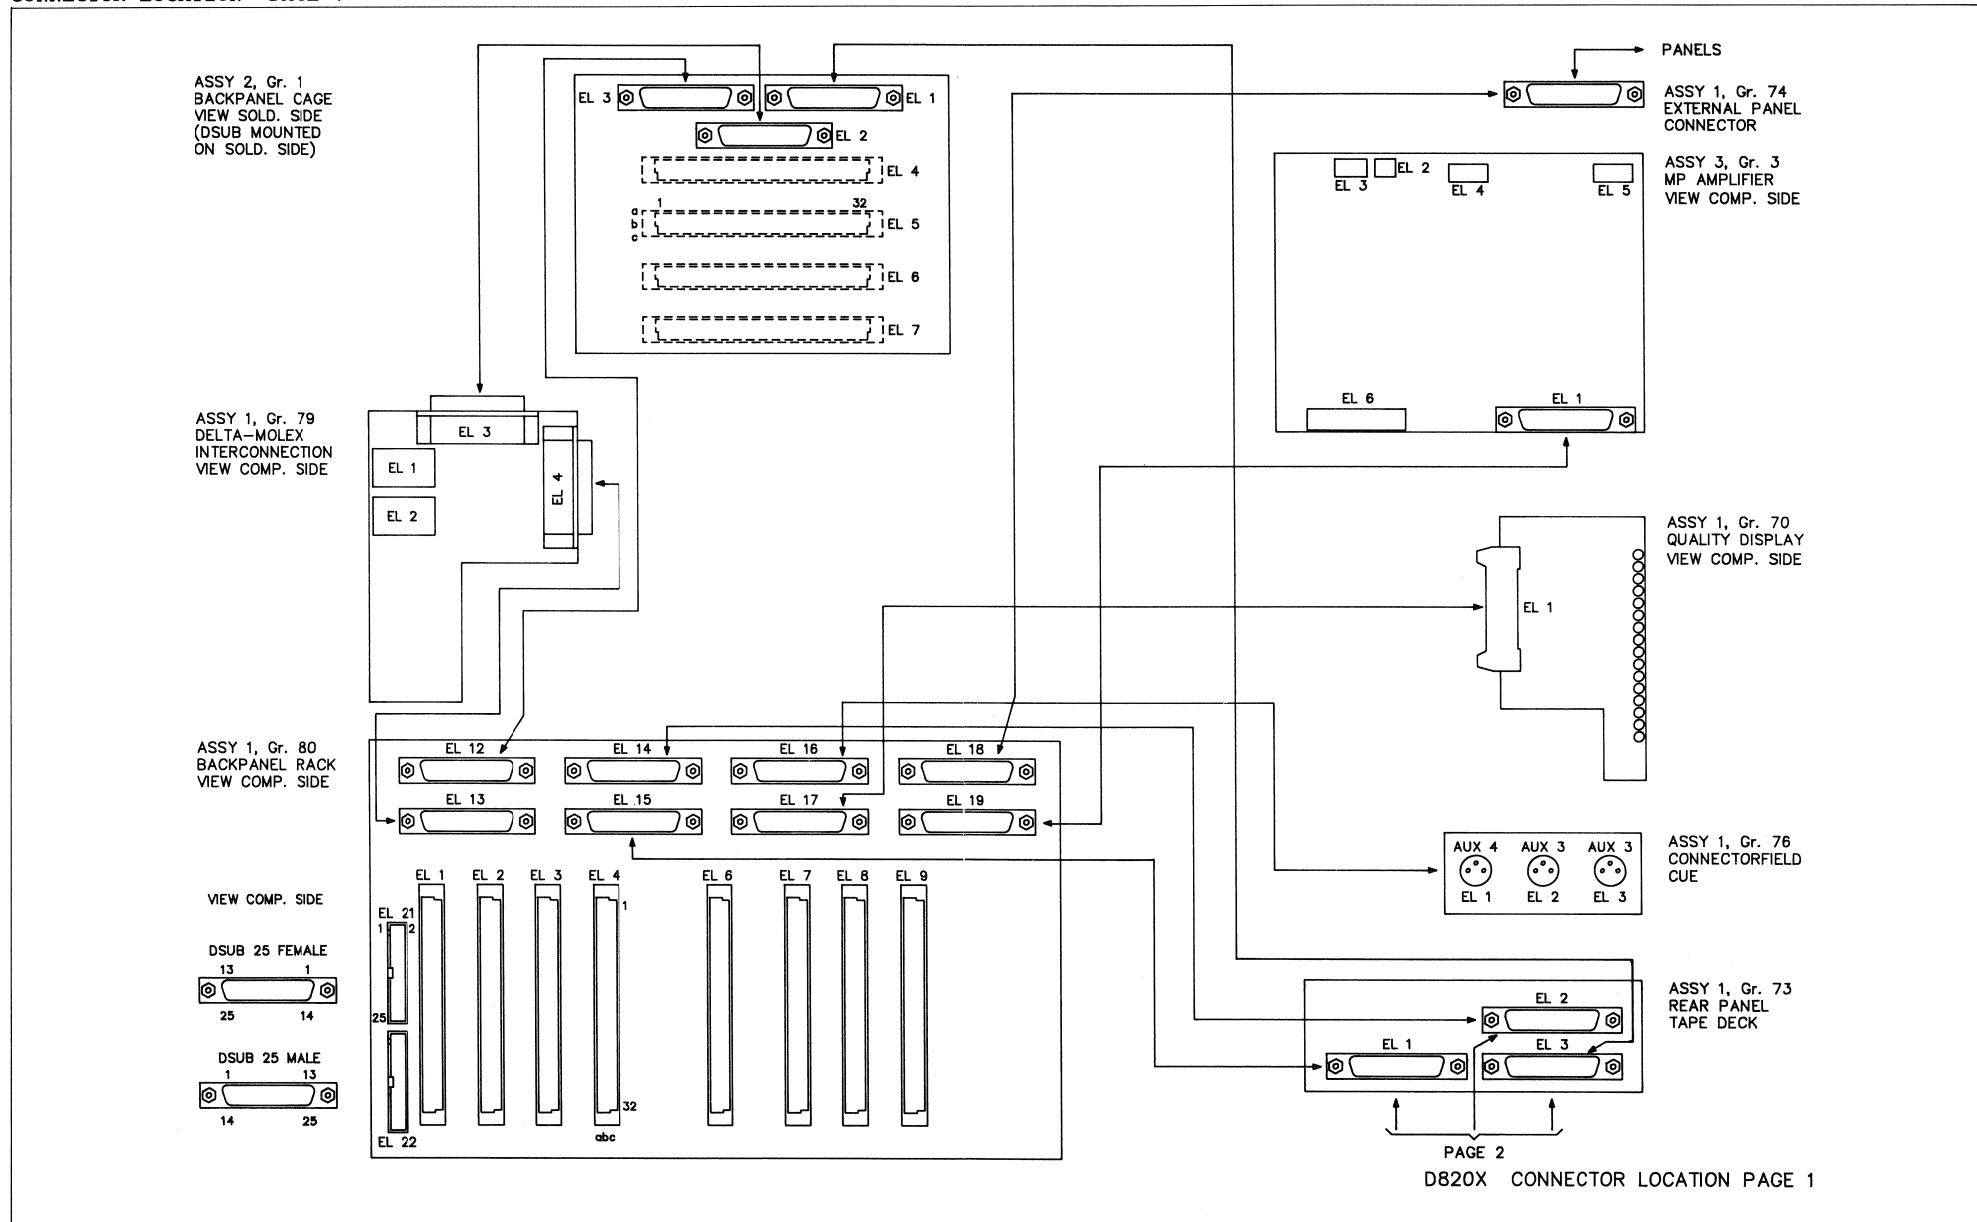


CONNECTOR LOCATION PAGE 2

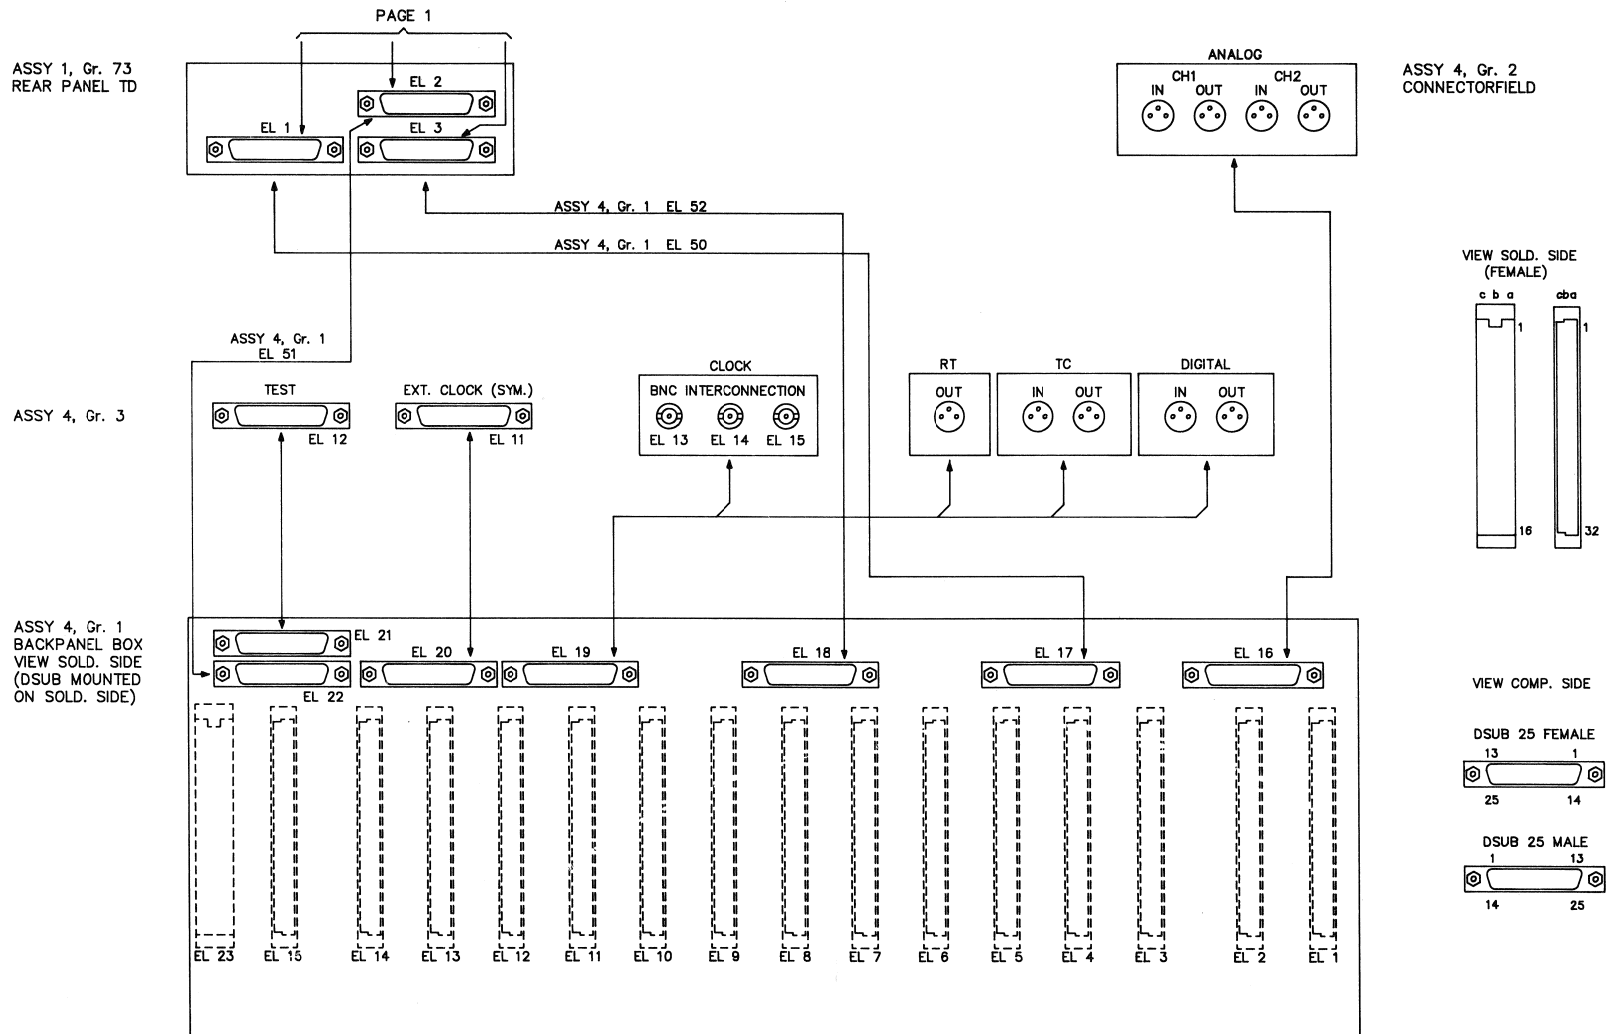


CONNECTOR LOCATION PAGE 3

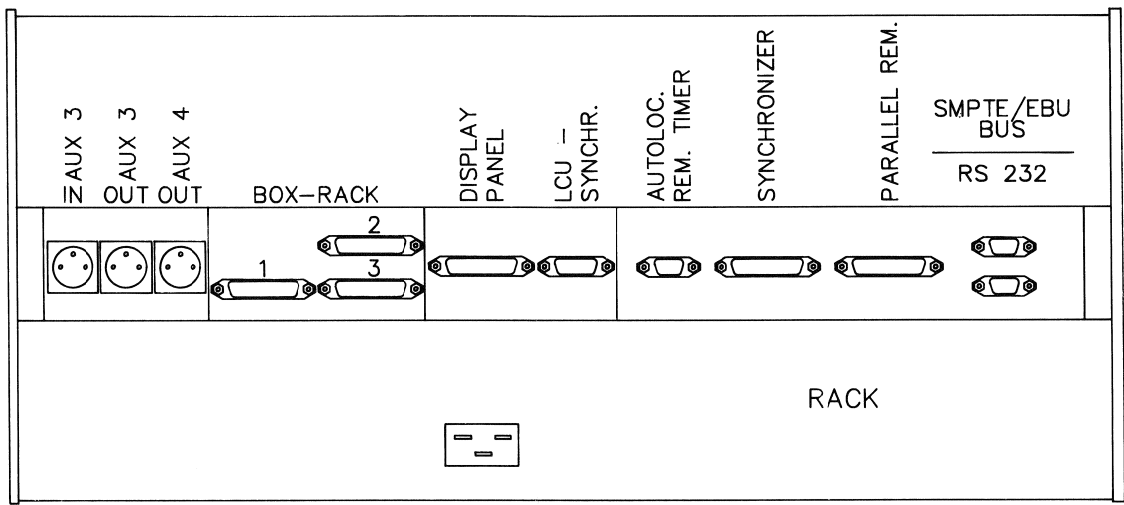

CABLE to RACK (BOX-RACK 1-3)

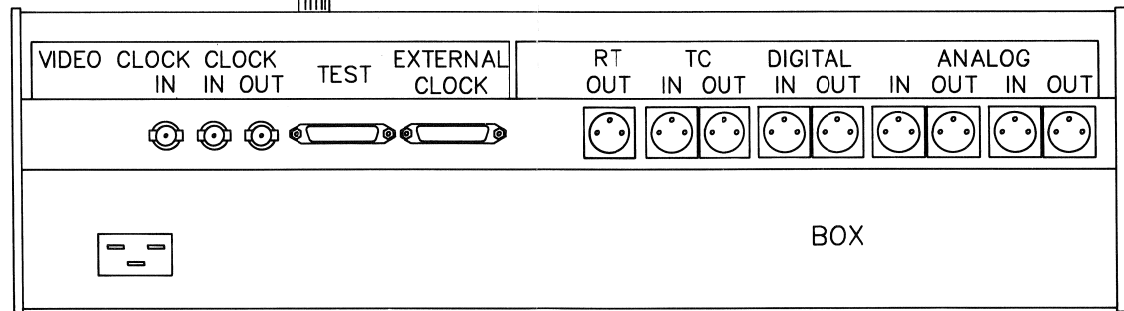

D820X: MENU STRUCTURE

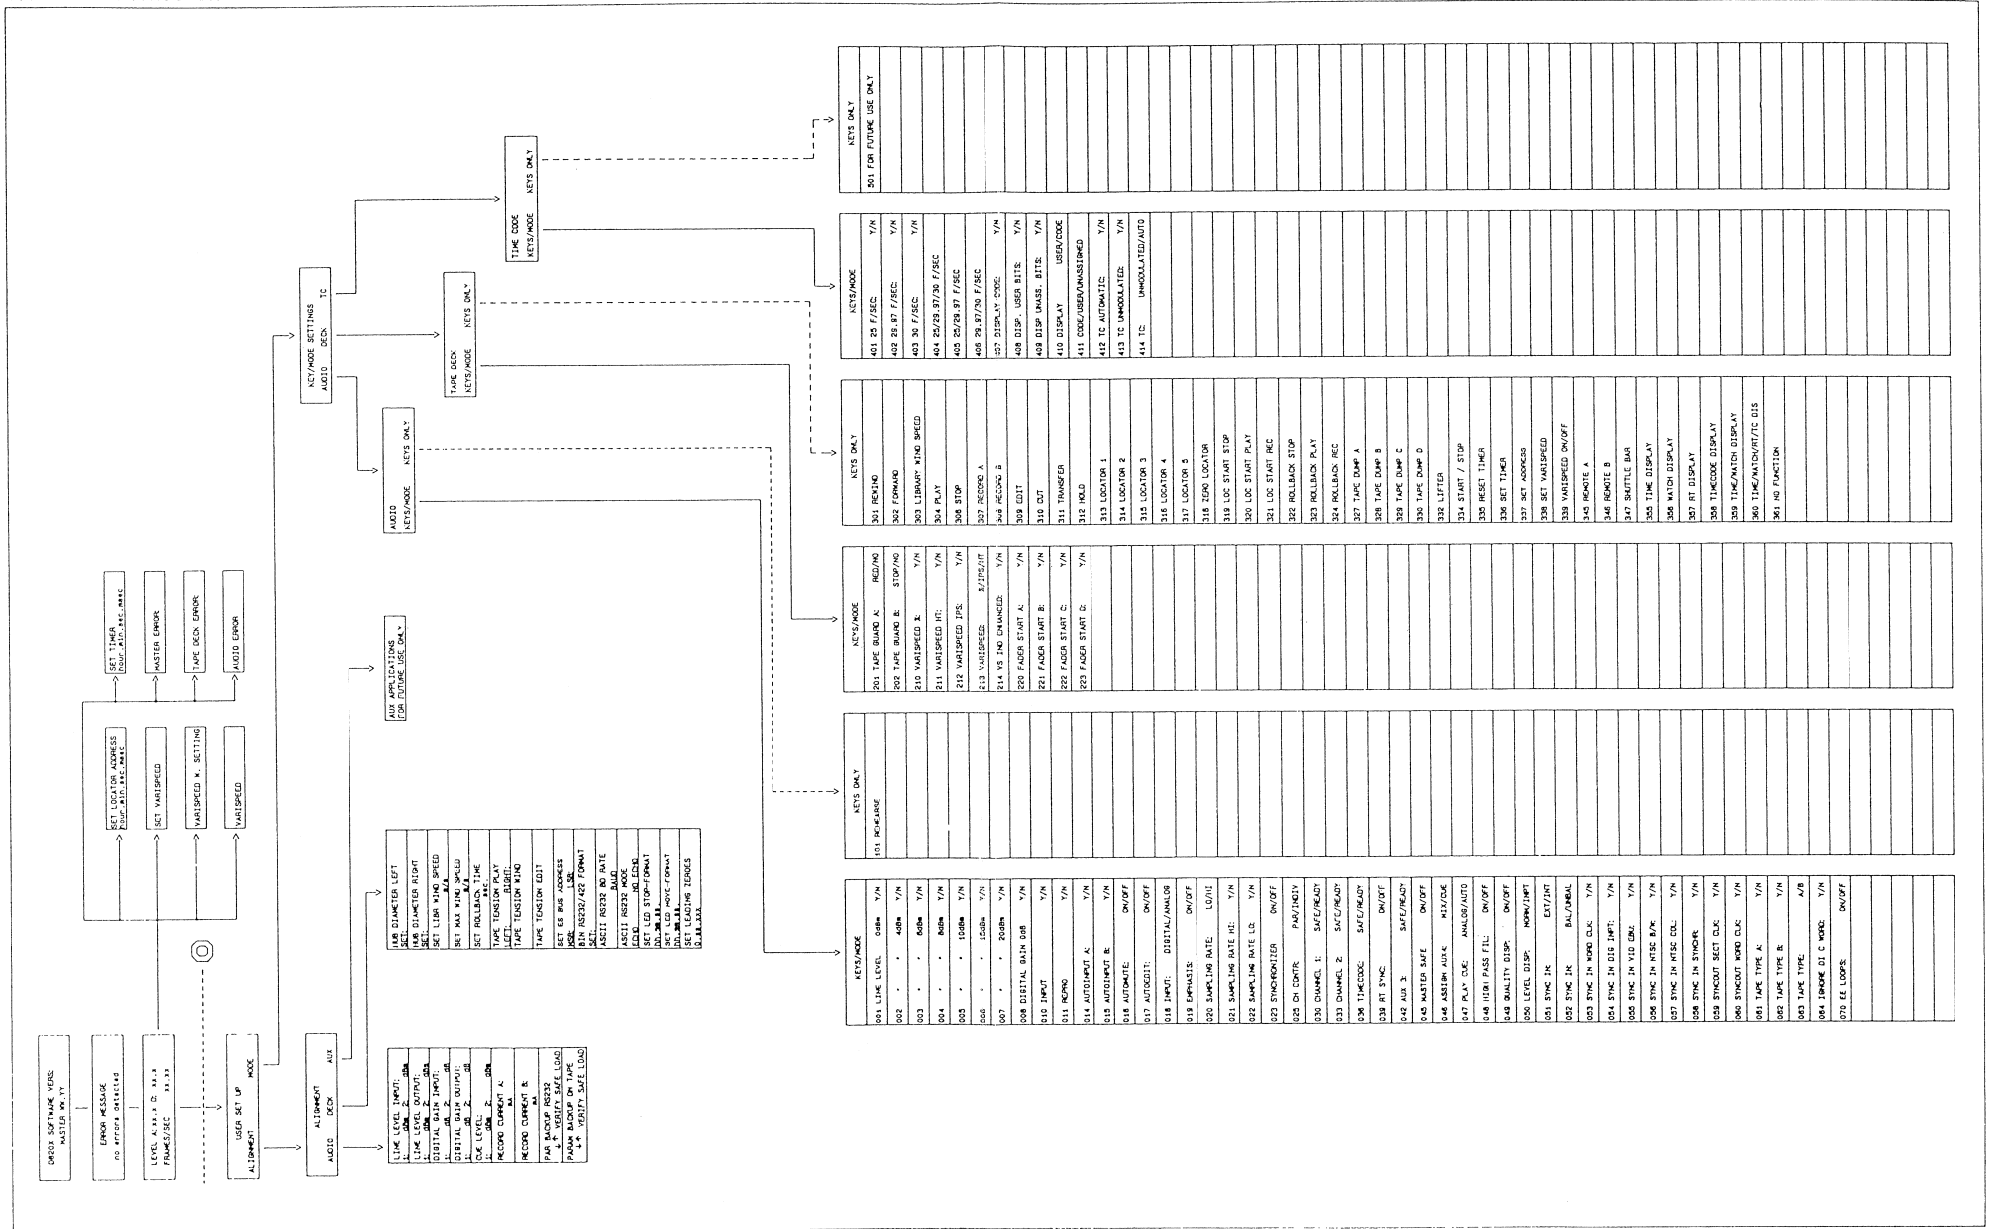

1 Signal Description

(Date of Printout 12.08.86)

Abbreviations	Symbols:
tTl	TTL level
+/-	Differential (symmetrical) signal
Amp	Amplifier
ana	Analog signal
Hd.	Head
423	RS-423-standard signal
Analog In	Analog Input Board
An. Output	Analog Output Board
Gain Cnt	Gains Control Board
Dapro IF	Data Processor Interface Board
Data Proc	Data Processor Board
Coef. Gen.	Coefficient Generator Board
Codec Cnt	Codec Control Board
Codec Mem	Codec Memory Board
X-format.	Transformatter Board
Run Proc.	Run Processor Board
RT/TC Cod	RT/TC Codec Board
Timing+T.	Timing + Test Board
Syscon	System Controller Board
Box Pwr.	Box Power Supply
An. Rout.	Analog Routing Board
PDM Cnt	PDM Control Board
PDM Demod	PDM Demodulator Board
PDM Mod	PDM Modulator Board
Disp. IF	Display Interface Board
Cue PQ	Cue/PQ Delay Board
Signal Q	Signal Quality Board (on transport)
Master IF	Master-Syscon Interface Board
Master	Master MPU Board
Rack Pwr.	Transport Power Supply
PB. Amp.	Playback Amplifier Board
TD. Monit.	Tape Deck Monitor Board
Chan. Cnt	Channel Control Panel (Transceiver)
Disp. Proc	Display Panel (Display Processor)
Mon. Panel	Monitor Panel (Amplifier)

Remarks: Only the non-inverted conductor of differential signals is listed below. The nomenclature for the inverted conductor contains an "I" right before the actual signal name and after the origin prefix (CC, DD, ect.) which may come first.

Signal	lev	Source	Sink	Description
ADBCLKA	+/-	Dapro IF	Analog In	Bit-clock for analog input
ADCCLIP1	ttl	Analog In	Gain Cnt	Clipping level channel 1 analog
ADCCLIP2	ttl	Analog In	Gain Cnt	Clipping level channel 2 analog
ADDAT1	+/-	Analog In	Dapro IF	Data from analog input CH 1
ADDAT2	+/-	Analog In	Dapro IF	Data from Analog Input CH 2
ADSTART	+/-	Dapro IF	Analog In	Start conversion
ADVALID	+/-	Dapro IF	Analog In	Data from analog input valid
ADT0--3	ttl	Run Proc.	X-format.	Data and sync addresses for X-formatter
AESIN	+/-	XLR plug	Gain Cnt	Data from digital input
AESO1	+/-	Dapro IF	XLR plug	Digital output data (aes/ebu)
ANAIN-1	+/-	XLR plug	Analog In	Channel 1 input analog
ANAIN-2	+/-	XLR plug	Analog In	Channel 2 input analog
ANAOUT-1	+/-	An.Output	XLR plug	Channel 1 output analog
ANAOUT-2	+/-	An.Output	XLR plug	Channel 2 output analog
AUX3IN	+/-	XLR plug	Cue P/Q	Aux 3 input (data only)
AUX3OUT	+/-	An. Rout.	XLR plug	Aux 3 output (data or cue right)
AUX4OUT	+/-	An. Rout.	XLR plug	Aux 4 output (mix or cue left)
B	ttl	PDM Mod.	Cue P/Q	Control signal for cue delay
BLSYN	+/-	X-format.	Write Amp	Blocksync for write amplifier
BSYNCOU	ttl	Gain Cnt	Dapro IF	Blocksync for digital output
CBUSAD	+/-	Syscon	Timing+T. RT/TC Cod Codec Mem Codec Cnt Gain Cnt Analog In An.Output PDM Cnt Disp. IF Detector	Address line syscon bus
CBUSCLK	+/-	Syscon	Timing+T. RT/TC Cod Codec Mem Codec Cnt Gain Cnt Analog In An.Output PDM Cnt Disp. IF Detector	Clock line syscon bus
CBUSDAT	+/-	Syscon	Timing+T. RT/TC Cod Codec Mem Codec Cnt Gain Cnt Analog In An.Output PDM Cnt Disp. IF Detector	Data line syscon bus
CCADDRDE	ttl	Codec Mem	Codec Cnt	Address disable
CCADDEC	ttl	Codec Cnt	Codec Mem	Encoder/decoder ram: 0 = encoder
CCAHO--7	ttl	Codec Cnt	Codec Mem	Ram column addresses
CCALO--7	ttl	Codec Cnt	Codec Mem	Ram row addresses
CCBLCRC	ttl	Codec Mem	Codec Cnt	CRC block flag
CCCRC	ttl	Codec Mem	Codec Cnt	CRC error
CCE0	ttl	Codec Mem	Codec Cnt	State of word error counter
CCECD	ttl	Codec Mem	Codec Cnt	Uncorrectable checkline
CCEE0	ttl	Codec Mem	Codec Cnt	Part of syscon control byte
CCEE1	ttl	Codec Mem	Codec Cnt	Part of syscon control byte
CCENCIN	ttl	Codec Mem	Codec Cnt	Encoder input enable
CCE1	ttl	Codec Mem	Codec Cnt	State of word error counter
CCFBCLR	ttl	Codec Mem	Codec Cnt	ALU feedback clear
CCILV	ttl	Codec Mem	Codec Cnt	Data discontinuity in checkline
CCIR5	ttl	Codec Cnt	Codec Mem	Timing signal
CCK5	ttl	Codec Cnt	Codec Mem	Timing signal
CCPR1	ttl	Codec Cnt	Codec Mem	Splice preset flag
CCQECD	ttl	Codec Mem	Codec Cnt	Q-line error correction disable
CCQECDM	ttl	Codec Mem	Codec Cnt	Q-line err corr disable masked
CCRDERR	ttl	Codec Mem	Codec Cnt	Read error simulation (syscon)
CCREPRO	ttl	Codec Mem	Codec Cnt	Block flag write
CCWRERR	ttl	Codec Mem	Codec Cnt	Write error simulation (syscon)
CCO--7	ttl	Codec Cnt	Codec Mem	Program instructions
CHAESB	ttl	Dapro IF	Gain Cnt	Right/left channel digital input
CHASEL1--2	ttl	PDM Cnt	An. Rout.	Channel select for monitoring

Signal	lev	Source	Sink	Description
CLK1	ttl	Timing+T.	Run Proc. X-format.	System clock
CLK2	ttl	Timing+T.		System clock
CLK4	ttl	Timing+T.	X-format. Gain Cnt Coef.Gen. Data Proc Dapro IF	System clock
CLK5	ttl	Timing+T.	X-format. Codec Mem Codec Cnt Coef.Gen. Dapro IF RT/TC Cod	System clock
CLK6	ttl	Timing+T.	Run Proc. X-format. Codec Mem Codec Cnt	System clock
CLK7	ttl	Timing+T.	Codec Mem Codec Cnt	System clock
CLK8	ttl	Timing+T.	Codec Mem Codec Cnt	System clock
CLK9	ttl	Timing+T.	Codec Mem Codec Cnt	System clock
DABCD1	+/-	Dapro IF	An.Output	Bit-clock for analog output
DACOUT1	ana	An.Output	An. Rout.	Channel 1 monitor input
DACOUT2	ana	An.Output	An. Rout.	Channel 2 monitor input
DADAT11	+/-	Dapro IF	An.Output	Data channel 1
DADAT21	+/-	Dapro IF	An.Output	Data channel 2
DAVAL1A	+/-	Dapro IF	An.Output	Data valid for digital output
DA96FS	+/-	Dapro IF	An.Output	Sampling clock for dig. output
DCDAPDEC	ttl	Codec Mem	Coef.Gen.	Data outpt frm decoder to dapro
DCD1CLK	ttl	Codec Cnt	Codec Mem Coef.Gen.	Data clock normal channel
DCD2CLK	ttl	Codec Cnt	Codec Mem Coef.Gen.	Data clock twin channel
DCENCDA	ttl	Dapro IF	Codec Mem	Data outpt frm dapro to encoder
DCFMUT	ttl	Codec Cnt	Data Proc	Mute flag : 1 = mute
DCFSPL	ttl	Codec Cnt	Data Proc	Splice flag
DCIDAVAL	ttl	Dapro IF	Codec Mem	Data shift enable (act. low)
DCINIT	ttl	Codec Cnt	Data Proc Gain Cnt	Block synchronization codec-dapro
DCINVAL	ttl	Codec Mem	Data Proc	Data error flag : 1 = error
DDATAAES	ttl	Dapro IF	Gain Cnt	Digital input data
DDBCLK	ttl	Dapro IF	Gain Cnt	Clock digital input data
DDBSYNIN	ttl	Dapro IF	Gain Cnt	Blocksync digital input data
DDB1D14	ttl	Coef.Gen.	Data Proc	Bus 1 for crossfilter
DDB2D13-15	ttl	Coef.Gen.	Data Proc	Bus 2 for crossfilter
DDCHPRO	ttl	Data Proc	Coef.Gen. Dapro IF Gain Cnt	Signal processing channel choice 0 = channel 2, 1 = channel 1
DDCHSTAT	ttl	Dapro IF	Gain Cnt	Channel status digital input
DDCK2AES	ttl	Gain Cnt	Dapro IF	Clock-2 digital input
DDCLKG1	ttl	Gain Cnt	Coef.Gen.	Bit-clock for DATAG1
DDCLRO	ttl	Coef.Gen.	Data Proc	ALU overflow flag
DDC3	ttl	Data Proc	Gain Cnt	Clipping active flag
DDDATAG1	ttl	Gain Cnt	Coef.Gen.	Serial gain addresses/data input
DDFADD0--1	ttl	Dapro IF	Gain Cnt	Digital input flag addresses
DDFGAI	ttl	Coef.Gen.	Data Proc	Load gain command for program control
DDGRDY1	ttl	Coef.Gen.	Gain Cnt	Ready to load gain
DDHPOFF	ttl	Gain Cnt	Data Proc	High pass filter on/off : 0 = on
DDIDIGMU	ttl	Gain Cnt	An.Output	Power-up reset
DDIFVAL	ttl	Dapro IF	Gain Cnt	Flag digital input data valid
DDISTART	ttl	Data Proc	Coef.Gen. Dapro IF	Start A/D conversion
DDLCLK1	ttl	Gain Cnt	Coef.Gen.	Shift enable/end of data for DATAG1
DDLCLK10	ttl	Data Proc	Dapro IF Gain Cnt	Repro out to display register
DDLCLK11	ttl	Data Proc	Dapro IF Gain Cnt	Sync out to display register
DDMIEN1	ttl	Coef.Gen.	Data Proc	Multiplier enable
DDMUTE	ttl	Gain Cnt	Data Proc	Overall mute
DDPROA0--9	ttl	Data Proc	Coef.Gen. Gain Cnt	Program counter (D0 = lsb)

Signal	lev	Source	Sink	Description
DDSPOTER	ttl		Coef.Gen.	not used anymore
DD3HEAD	ttl		Coef.Gen. Data Proc	not used anymore
DINT	ttl	Run Proc.	X-format	Input data for transformatter
DTR1--8	+/-	Detector	Run Proc.	Digital track 1 to 8
DPCBAD	+/-	Disp. IF	Chan.Cnt Disp.Proc Mon.Panel	Sysbus-addresses for Panels
DPCBDAT	+/-	Disp. IF	Chan.Cnt Disp.Proc Mon.Panel	Sysbus-data for Panels
DPCBCLK	+/-	Disp. IF	Chan.Cnt Disp.Proc Mon.Panel	Sysbus-clock for Panels
DPO--7	ttl	Cue P/Q	PDM Mod.	Delayed PDM data
DSPA-0--7	ttl	PDM Cnt	Signal Q.	Signal quality channel 1
DSPB-0--7	ttl	PDM Cnt	Signal Q.	Signal quality channel 2
DSSY	ttl	X-format.	RT/TC Cod	Sectorsync for rt
DTR1--8	+/-	Detector	Run Proc.	Digital tracks 1--8
DO--D7	ttl	PDM Cnt	PDM Demod An.Rout.	8-bit bus for level adustments
EEPDM	ttl	PDM Cnt	PDM Demod	PDM E to E loop on/off
ENCDELAY	ttl	PDM Cnt	Cue P/Q	Cue P/Q data delay adjust
FILCLK	ttl	PDM Cnt	PDM Demod	SC-filter bandwidth control
FBWS	+/-	X-format.	---	Word sync
FLEM	ttl	Gain Cnt	Analog In An.Output	Emphasis flag
F1--F3	ttl	X-format.	---	Flags to be written on tape
HDIR1--12	ttl	Read Head	Head Amp.	Read head tracks 1--12
HI/LO	ttl	Timing+T.	X-format.	Sampling frequency=32kHz or not
IAN/PDM	ttl	PDM Cnt	PDM Demod	Cue tracks recorded 0 = analog, 1 = PDM
ICARRY	ttl	Dapro If	Gain Cnt	Blocksync out
ICLK5	ttl	Timing+T.	X-format.	System clock
ICLK6	ttl	Timing+T.	X-format. RT/TC Cod	System clock
ICOUT1WR	ttl	PDM Cnt	An. Rout.	Cue 1 output level
ICOUT2WR	ttl	PDM Cnt	An. Rout.	Cue 2 output level
IERRL	ttl	----	X-format.	X-formatter error flag CRC
IHISPD	ttl	Detector	PB. Amp.	0 = tape speed > 1m/sec
ILOCK	ttl	Dapro IF	Gain Cnt	Locksignal DI-PLL
ILOSPD	ttl	Detector	PB. Amp.	0 = tape speed > 20 cm/sec
IMASSA	ttl	Write Amp	Detector	Master Safe (0 = on)
IPDMMUTE	ttl	PDM Cnt	PDM Demod	Mute PDM
IRECD1--2	ttl	Detector	Write Amp	Write-enable for dig.track 1/2
IREC1--2	ttl	Detector	Write Amp	Write-enable for dig.track 3--10
IREC11--12	ttl	Detector	Write Amp	Write-enable for dig.track 11/12
ISYNC	ttl	Run Proc.	X-format.	Sync for X-formatter input data
ITEST	ttl	----	X-format.	Test signal
IWRET	ttl	Run Proc.	X-format.	X-formatter input data valid 0 = 2 head
ITRAR	ttl		X-format.	Test signal
ISYRT	ttl	RT/TC Cod	X-format.	RT sync pulse
K-PWRUP	+24	Rack Pwr.	Box Pwr.	Pwr-up voltage for box pwr suppl
K5	ttl	Codec Cnt	Codec Mem	Timing signal
MON/STE	ttl	PDM Cnt	PDM Mod. PDM Demod An. Rout. Cue P/Q	PDM track mono/stereo: 0 = mono
MONTR1	ana	An. Rout.	Mon.Panel	Monitor left signal
MONTR2	ana	An. Rout.	Mon.Panel	Monitor right signal
MON1--5	ttl	TD.Monit.	Detector	Tape deck monitor keys
P-ADDR0--11	ttl	Syscon	----	MPU-addresses
P-DATA0--7	ttl	Syscon	----	MPU-data
P-EN	ttl	Syscon	----	MPU-enable
P-INMI	ttl	Syscon	----	MPU-interrupt masked
P-IN2	ttl	Syscon	----	MPU-interrupt level 2
P-IRES	ttl	Syscon	----	MPU-reset
P-ISEL0--3	ttl	Syscon	----	MPU-select
P-OUT1--2	ttl	Syscon	----	MPU-port output
P-RW	ttl	Syscon	----	MPU-read/write signal

Signal	lev	Source	Sink	Description
PBTR1	+/-	PB. Amp.	RT/TC Cod An.Rout.	Time code playback signal
PBTR2	+/-	PB. Amp.	RT/TC Cod	Reference time playback signal
PBTR3--10	+/-	PB. Amp.	Detector	Digital tracks playback signal
PBTR11	+/-	PB. Amp.	PDM Demod	Cue right playback signal
PBTR12	+/-	PB. Amp.	PDM Demod	Cue left playback signal
PDBCLK	+/-	Dapro IF	PDM Mod.	Bit-clock for PDM modulator
PDCLK3	+/-	Timing+T.	PDM Mod. Cue P/Q	CLK3 for PDM electronics
PDDATA	+/-	Dapro IF	PDM Mod.	PCM data for PDM modulator
PDWCLK	+/-	Dapro IF	PDM Mod.	Word-clock for PDM modulator
PDM-1	ana	PDM Demod	An. Rout.	PDM 1 playback signal
PDM-2/SC	ana	PDM Demod	An. Rout.	PDM 2 playback signal
PDMIOE	ttl	Cue P/Q	PDM Mod.	Ouput enable for PDM data to be delayed
PD0--PD7	ttl	PDM Mod.	Cue P/Q	PDM data to be delayed
PHOSELA	ttl	PDM Cnt	An. Rout.	Phone output : source a
PHOSELB	ttl	PDM Cnt	An. Rout.	Phone output : source b
PWROK	ttl	Box Pwr.	Syscon	Power supply ok signal
PXRT	ttl	X-format.	RT/TC Cod	RT window
RAND	ttl	X-format.	---	Test signal
RDTC	+/-	PB. Amp.	RT Codec	Time Code playback signal
RESHPG1-2		X-format.	RT/TC cod	spare interconnections
RTIN	+/-	XLR plug	RT/TC Cod	Reference time input
RTOUT	+/-	RT/TC Cod	XLR plug	Reference time output
RTSYNC	ttl	RT/TC Cod	Timing+T. X-format.	Servo controlled by RT
RES3	ttl	PDM Cnt	PDM Demod	Spare bit
SAMPCLK	+/-	Timing+T.	Box Pwr.	Power supply clock (fs)
SAMPH/L	ttl	Gain Cnt	Dapro IF	Samp. frequ. 1=44,1/48kHz 0=32kHz
SCLK3	ttl	Timing+T.	Run Proc.	Run Processor clock
SECSYN	ttl	X-format.	RT/TC Cod	Sector sync
SLR	ttl	X-format.	RT/TC Cod	Servo speed control indication
SPEAKMUT	ttl	PDM Cnt	Mon.Panel	Monitor Panel mute signal
SPLINIT	ttl	Gain Cnt	Data Proc Dapro IF	Splice Initialization
SSDACLK	+/-	Master IF	Syscon	SSDA IF. clock
SSDADTR	+/-	Master IF	Syscon	SSDA IF. data transmit ready
SSDACTS	+/-	Syscon	Master	SSDA IF. clear to send
SSDAMRX	+/-	Syscon	Master	SSDA IF. receive data
SSDAMTX	+/-	Master IF	Syscon	SSDA IF. transmit data
SY/WDCKI	423	BNC plug	Timing+T.	Sector/Word clock input
SY/WDCKO	423	Timing+T.	BNC plug	Sector/word clock output
SY/WDIN	+/-	Ext plug	Timing T.	Sector/word clock input
SYWDOUT	+/-	Timing+T.	Ext plug	Sector/word clock output
SYSCFS1--2	ttl	RT/TC Cod	Run Proc.	Sampling frequency
TAPETYPE	ttl	RT/TC Cod	Run Proc.	0 = type B, 1 = type A
TCIN	+/-	XLR plug	RT/TC Cod	Time code input
TCOUT	+/-	RT/TC Cod	XLR plug	Time code output
TCRCERR	ttl	X-format.	Codec Mem	CRC error
TCY-4	ttl	Codec Cnt	X-format.	Carry output reference counter
TD-MVCLK ???	ttl	Ref Clk	PDM Demod	Move pulses
TDECDASY	ttl	X-format.	Codec Mem	Data from X-formatter to decoder
TDSMUTE	ttl	Detector	TD Monit.	Tape deck monitor mute signal
TEST1	ttl	RT/TC Cod	---	Test signal
TFORMENC	ttl	Codec Mem	X-format.	Data from Encoder to X-formatter
TDMPRES	ttl	TD. Monit	Detector	Tape deck monitor present flag
TREFEXT	+/-	Master IF	Timing+T.	External capstan reference
TREFINT	+/-	X-format.	Master If	Internal capstan reference
TPR-1	ttl	Codec Cnt	X-format.	Spare interconnection
TSTSIFRD	ttl	Terminal	Syscon	Terminal interconnection rcv
TSTSIFTD	ttl	Syscon	Terminal	Terminal interconnection xmt
TTIXLOOP	ttl	Timing+T.	X-format. RT/TC Cod	EE loop 2 on
TTRDEMPH	ttl	X-format.	Timing+T.	X-formatter emphasis to syscon
TTREC	ttl	Timing+T.	X-format.	Record signal for X-formatter: nominal servo speed
TTWREMPH	ttl	Timing+T.	X-format.	X-formatter write emphasis
VCLKIN	423	BNC plug	Timing+T.	Video clock input
VIDCLK	+/-	Ext plug	Timing+T.	Video clock input

Signal	lev	Source	Sink	Description
WRCLK4	+/-	X-format.	Write Amp	Clock to read serial data
WRDOUT	+/-	X-format.	Write Amp	PCM serial data to Write Amp.
WRSY0	+/-	X-format	Write Amp	Sync signal to Write Amp.
WRTC ???	+/-	RT Codec	TC Modem	Time Code record signal
WRTR1 ???	+/-	TC Modem	Write Amp	Time Code write signal
WRTR2	+/-	RT/TC Cod	Write Amp	Reference Time write signal
WRTR3--10	+/-	Write Amp	Detector	Digital tracks write signals
WRTR11	+/-	PDM Mod.	Write Amp	Aux track 3 write signal
			PDM Demod	
WRTR12	+/-	PDM Mod.	Write Amp	Aux track 4 write signal
			PDM Demod	
WRTOU1--12	ttl	Write Hd.		Write head signal
W0--W1	ttl	X-format.	----	Flags to be written on tape
2ECCLK	+/-	Timing+T.	Dapro IF	System clock : T = 128 * fs

2 SYSCON Monitor

The Syscon monitor is part of the Syscon operating system. It is designed to enable a user to control and test programs and hardware for the audio section of the D820X digital tape recorder.

Connect a terminal (supported types below) or a personal computer to the DSub25 connector labeled "Test" at the rear panel of the PCM box. See par. 2.4.1.5 and 2.10.3.A in vol. 1 of the D820X manuals for electrical interfacing. Par. 2.10.5 in the same manual describes the operation of the ASCII interface for the master monitor and is also applicable to the operation of the syscon monitor.

After power-up, the Syscon monitor displays the following message on a properly installed terminal or computer:

```
Welcome to the
D820X SYSCON Operating System
Rel. ww/yy (C)PCM SoftTeam
STUDER AG CH-8105 Regensdorf
```

```
TTY:ESPRIT
```

```
> _
```

The message "TTY:ESPRIT" indicates that the system has been installed for an "ESPRIT" terminal. After the logon message, the prompt ">" and the cursor appears.

Commands:

Command format: > command {arg {arg {.. }}}

The command name is followed by a delimiter of space, comma, or carriage return. If there are no arguments, carriage return terminates the command; otherwise, a space or a comma separates the command from its argument. A space or comma separates arguments from each other. Some short commands (one character commands) require no carriage return and have no arguments.

Entering Commands:

Commands must be entered next to the prompt without a space. Upper or lowercase letters are allowed. The commands can be abbreviated. For example just type in S<CR>, instead of SEND<CR>. The Syscon monitor searches for the first string in the command table which matches the entered string and executes that command.

Misstyped commands can be corrected with "Back Space" and "Del". "ESC" deletes the command line.

The monitor displays an ERROR message when a command can not be found:

```
ERROR: command not found, use HELP
```

By typing the command "HELP<CR>" or just "H<CR>" all commands known to the system are listed. The listing can be interrupted and continued with the space bar or aborted with "ESC".

If the monitor detects a valid command with wrong or mistyped arguments, it displays an ERROR message and the syntax of the command. Then the command line will be displayed again with the cursor at the position of the wrong argument. This allows for quickly correcting arguments:

```
>SEND 71 7G
ERROR: bad data

>SEND 71 7G
- cursor placed under wrong argument
```

A command is normally terminated if the prompt appears again without a preceding error message.

Most arguments can be entered just by their first letters. Arguments for addresses or data can be entered in the following forms:

```
hexadecimal: 1B (default)
decimal:     27.D
binary:     11011.B
label:     CLRSCR (see command ?LABEL)
```

Detailed Command Description:

General: Arguments in brackets {} are optional. Some commands display the actual status if no argument is given:

```
Example: >ECHO {Enter}
=ON
>
_
```

Arguments can have a set of possible switches or modes separated by slashes "/". Note that only one item can be selected at once.

Text in round brackets () which is only for remarks and the character ">" which indicates the system prompt should not be entered.

Note: Use HELP to list all available commands.

Monitor Command List:

"@"	(single stroke command) Typing @ recalls the last entered command. The command can be executed with "carriage return" or modified as described in "Entering Commands".
"/"	(single stroke command) Displays data of last entered ROM/RAM memory address.
?"	See command HELP.
?LABEL	Displays a list of addresses of constants or subroutines which can be directly accessed by its LABEL.
?TTY	Searches through ROM for terminal_drivers. If it has found a driver, it displays the name of the driver on the display. Confirm a driver by entering "y" or let ?TTY search for another driver by typing "n". A few terminal drivers are listed below (see also CTTY).

Preinstalled terminal drivers:

ANSI standard driver for IBM PC (VT 100) and Atari
 ASCII dummy terminal (no special functions)
 ESPRIT Esprit by Hazeltine or by Esprit model 6110
 HP Hewlett Packard
 TVI905 TeleVideo 905

- AUTOEDIT {on/off}** AUTOEDIT routes the the digital (main) tracks to the audio monitor in play or record mode; otherwise the audio monitor is connected to the cue tracks.
- AUTOINPUT {on/off} {A/B}** In mode A, AUTOINPUT routes all digital channels to input if not in play or record. Otherwise, channels are set according to the channel status. In mode B, AUTOINPUT routes ready channels only to input for the same conditions as in mode A. {A/B} argument only sets AUTOINPUT mode.
- AUTOLEVEL {on/off}** This function is referred to in the menu as LEVELDISP. When on, the level-display is automatically connected to input if the recorder is in stop or record or if the channels are in input mode. In off state the level display is configured to read off-tape signals.
- AUTOMUTE {on/off}** AUTOMUTE mutes the cue track line outputs in wind mode only.
- BYTE address** Displays in hex the contents of the memory byte specified by address or label. See also MEMORY or WORD.
- CALGAIN +/- value(dB) analog/digital{input/sync/repro{left/right}}}**
 CALGAINS sets the calibrated gains to the following possible values:
 digital: - 10 ... + 6 dB
 analog: + 0 ... + 20 dB
- Examples:**
 >CALGAIN + 2 a r l : sets analog repro gain left to 2 dB.
 >CALGAIN - 4 a i : sets both analog input gains to - 4 dB.
 >CALGAIN + 0 d r : sets all digital gains right to 0 dB.
- CBUS enable/disable/address** The argument "disable" disables access to the control bus for all programs. This is useful to interrupt data transfer on the sysbusbus for test or other purposes.
 The argument "addr" enables data transfer to or from only one particular sysbusbus address. Access to all other addresses is disabled.
 This command has no effect on the commands SEND and RECEIVE !
- Example:** >CBUS 70 : disables access to all sysbusbus addresses except address 70
- CODEC testmode** This command is used to set the Codec into its various test modes for read/write error simulation and to select the quality display information generated by the Codec.
 The Codec test modes are listed in section "D820X: COMMUNICATION BETWEEN SYSCON AND HARDWARE", in section 4 of vol. III of the D820X manuals.
- Example:** >CODEC 47: simulates read errors (long burst ch2 all tracks)
- CTTY type** CTTY is another way to change the terminal driver currently in use. In opposition to ?TTY the name of the terminal driver can be entered directly. The driver will be replaced immediately if the specified driver is available; else, an error message is displayed.
- Example:** >CTTY ESPRIT: TTY driver will be replaced by ESPRIT terminal
- CUEGAIN (dB) {left/right}** CUEGAIN sets the cue output gains in the same way as CALGAIN in the range: 0..20 dBV.7. AUX3 gain is fixed to TTL level when in cue mix mode (see also command CUEMODE).
- Example:** >CUEGAIN 6 L : sets cue output gain left to 6 dBm

CUEMODE {unmodulated/modulated/auto} {stereo/mix}

arg: {unmod/mod/auto}

selects the appropriate mode for the cue track demodulator (PDM Demodulator). The D820X always writes modulated cue tracks. The arguments are optionally and can be abbreviated (u/mo/a) (s/mi).

arg: {stereo/mix}

selects the cue track configuration either for stereo cueing mode or for mixed cue mode (aux4mix). The two cue tracks are then summed and recorded on auxiliary track 4 (left cue track). In mix mode the auxiliary data channel is assigned to the right cue track.

Example: > CUEMODE u s : selects analog bias playback and stereo cue mode

DISPLAYFORMAT data

This command is used to set the LED display format:

```

format: bit   7 6 5 4 3 2 1 0
              | | | | | | | |
              | | | | | | | |
              | | | | | | | | 0 0 → display stop format 1/1000sec
              | | | | | | | |  :
              | | | | | | | | 1 1 → display move format 1/1000sec
              | | | | | | | | 0 0 → display move format 1/1000sec
              | | | | | | | |  :
              | | | | | | | | 1 1 → leading zero suppr. hh.mm.ss.xxx
              | | | | | | | | 0 0 → leading zero suppr. hh.mm.ss.xxx
              | | | | | | | |  :
              | | | | | | | | 1 1 → m.ss.xxx
              | | | | | | | |  :
              | | | | | | | |
              x x

```

Example: > DISPLAYFORMAT 00111000.B : move m.ss.x stop m.ss.xxx

DUMP {addr1} {addr2} {r}

Dumps a block of memory in hex digits and ASCII characters. Press "space bar" to hold/continue dump or "Escape" to abort. Argument "r" repeats the dump function.

Examples:
 > DUMP : dumps all, starting at the last entered address
 > DUMP 400 : dumps only one line 400...4F
 > DUMP 20 1000 : dumps from address 20 to address 1000

ECHO {on/off}

Echo character entered by keyboard on the screen.

EELOOP {0..5}

EELOOP (electronics to electronics loop) is used to test individual sections of the digital audio path.

Examples:
 > EELOOP 0 : no loop → signal off tape
 > EELOOP 1 : Write amp/Run Processor loop (Detector) (l+r)
 > EELOOP 2 : Transformatter loop (also RT-loop)
 > EELOOP 3 : loop after Codec
 > EELOOP 4 : input loop, before Codec
 > EELOOP 5 : Dapro input loop (ADC to DAC converter)

EMPHASIS {on/off}

EMPHASIS selects record/playback with emphasis (ADC) and deemphasis (DAC). In playback, deemphasis is set according to the emphasis flag encountered on tape, in digital input mode according to the channel status byte.

HELP

Displays the command list with syntax. Press "space bar" to hold/continue listing or "Escape" to abort.

HPFILTER {on/off}

HPFILTER selects the digital highpass filter. It is active in the analog input mode only.

- IGNOREDI {on/off}** "Ignore digital input" (control word) is used when the control word of the digital input source is not confirming in its format to the professional AES/EBU standard. The D820X operates with professional AES/EBU control information only, and will display an error message "Illg Dig Inp Format" when in digital input mode with (IGNOREDI = off) in the case of a control word which does not confirm to the professional AES/EBU standard. With (IGNOREDI = on) the D820X neglects incoming digital input control information, thereby enabling the user to select sampling rate and emphasis manually. No error message will be displayed anymore.
- Example:** >IGNOREDI on : neglects digital input control information
- INPSEL {analog/digital}** The command INPSEL controls the input selector. Input to the recorder can be either from ADC (analog) or DI (digital input).
- INPUT {1} {2} {tc} {aux}** When INPUT is selected, the line outputs and the digital outputs carry the input signal of a specified channel (channel 1 or 2). If no argument is given, all channels are set to input. See also commands REPRO, AUTOINPUT, and EELOOP.
- Example:** >INPUT 2 tc : sets channel 2 and timecode to input
- MASTERCLOCK {internal/ebu/ntsc{black&white/color}/di/tls/wordclock} {balanced/unbalanced} {outputclock wordclock/sector}**
- The clock reference for the masterclock can be supplied by the following sources:
- | | |
|------------------|----------------------------------------------------------------------|
| internal | : internal crystal |
| ebu | : external video clock 50 Hz or composite video (unbalanced only) |
| ntsc black&white | : external video clock 60 Hz or composite video (unbalanced only) |
| ntsc color | : external video clock 59.94 Hz or composite video (unbalanced only) |
| di | : digital input (AES/EBU format) |
| tls | : external synchronizer |
| wordclock | : external word clock (sampling frequency) |
- Some clock input circuits accept balanced or unbalanced signals. The argument "balanced/unbalanced" should be added according to the input signal. There is only one connector for clock output. The argument "outputclock wordclock/sector" is used to select between word and sector clock as output clock.
- Examples:** >MASTERCLOCK int out w : selects crystal, outclk = word
>MASTERCLOCK di bal : selects digital input balanced (unbalanced is not possible)
- MEMORY {addr}** The command MEMORY displays or changes memory data. If no address is given the last entered address will be used. Press "space bar" to skip to the next databyte, "\" to skip back to the previous databyte or "carriage return" to finish.
- Example:** >MEMORY 100
0100: 05
- enter new data here
- MONITOR {audio/cue/tc} {input/repro} {mute/demute {1/2}}**
- The audio monitor can be fed by different signal sources specified with the first two arguments. Both monitor channels can be muted with the additional argument "mute/demute {1/2}".
- Example:** >MONITOR cue mute 1 : monitoring of cue tracks, ch 1 muted
>MONITOR tc r : monitoring of timecode repro
- MR {addr}** Repetitive readout of memory data, specified with {addr}. See also command MEMORY.
- PLAY {quit}** The command PLAY configures the electronics for reproduce mode and demutes the digital reproduce channels. PLAY quit terminates playback mode and mutes the digital reproduce channels.

POWER {down} The command POWER demutes all output channels and the audio monitor. This command is also used to reset Codec Control. POWER down mutes all output channels and the audio monitor. All write amplifiers will be switched off (for safety) and the checksum of the nonvolatile RAM section will be calculated. Then the System controller shuts down.

QDISPLAY {on/off} The signal quality display is active only if it is enabled with the command QDISPLAY (default on) and only in play/repro mode.

RAMTEST addr1 addr2 {r} RAMTEST checks RAM for read/write errors. There are two RAM-sections:

section	address range
Syscon	0080 . . . 07FF (min 2 k RAM)
user	0800 . . . 1FFF (only if 8 k RAM installed)

The additional argument {r} may be added to repeat ramtest; press "ESC" to abort.

Example: >RAMTEST 80 7FF r repeats syscon RAM test

READY {master} {d {1/2}} {a {1/2/3/4}}

READY with no argument, it sets all channels to ready mode.

READY with the argument {master} disables MASTERSAFE (see also commands SAFE and RECORD).

Example: >READY d1 a1 a2 : sets dig ch1 and aux ch1 + 2 to ready

RECEIVE addr {b}

RECEIVE reads one byte from a sysbus transmitter continuously until any key is pressed. "addr" must be an even address, one byte long. The argument {b} can be added to display the received byte in binary format.

Examples: >RECEIVE 70
C_BUS ADDR: 70 DATA 5A

>RECEIVE 70 b
C_BUS ADDR: 70 DATA 01011010

RECORD {quit} {current {+/- xx}}

RECORD activates record mode. Data of ready channels is written on tape if rehearsal mode is not established.

RECORD quit terminates record mode.

The record current is set with the optional argument "current +/- xx". "xx" must be in the range 0..44.

Example: >RECORD cur + 35 : sets record current to 35.

REHEARSE {on/off}

Activates rehearsal mode. The entire encoding and decoding chain is used and data is routed directly in front of the record drivers to the Run Processor. Due to this measure all functions of the digitalaudio electronics can be simulated (gain adjustments, etc.) and the delays are identical to the off tape mode, except for the head delay which is 152 blocks. The command here affects both channels simultaneously. Only commands from master or from the serial interface are channel selective. If necessary, channel selective commands can be transmitted by using SEND command (see below). The write amplifiers remain in safe mode.

See also commands EELOOP and SAFE.

REPRO {1} {2} {tc} {aux}

Sets the appropriate main channels 1 or 2 or the time code track or auxiliary 3 track to reproduce mode, instead of input mode.

RESET {time/pcm/peak/qcount} {quit}

RESET must always be followed by RESET quit. This combination resets the actual time (when this option is selected) which is displayed in the time displays. In watch mode, reset also clears the signal quality counters. In RT mode, reset is active in record mode only. TC must be reset on the external time code generator. The options peak or qcount reset either the peak level display or the quality counters.

RTSYNC {on/off}

RTSYNC has two different meanings. It is used to protect the RT track from accidental overwriting and controls the TBC (time base corrector) sync mode. If RT Sync is on, the TBC synchronizes to RT sync from tape, else to data block sync. During normal operation RT Sync is necessary when a channel sequential recording is made or played back.

SAFE {master} {d {1/2}} {a {1/2/3/4}}

SAFE with no argument sets all channels in safe status. SAFE with the argument {master} means MASTERSAFE. In this mode, all channels are switched to safe, overriding to ready is not directly possible (see also command READY).

Example: >SAFE d1 d2 a1 : sets dig ch 1 + 2 and aux ch1 to safe

SAMPFREQ {hi/lo/data}

The D820X has a set of two VCXO's¹ which generate the masterclock timing, "hi" selects the higher sampling frequency, "lo" the lower sampling frequency of which the recorder is equipped. With "data" one of four sampling frequencies can be specified even if the recorder is not equipped accordingly:

Fs = 1(48), 2(44.1), 3(32) and 4(44.056) kHz. This is allowed only in external sync mode (see MASTERCLOCK).

Example: >SAMP hi : selects the high sampling rate
>SAMP ext 4 : selects 44.056 kHz => ext. Sync !

SEND address data {repeat}

It is used to send data bytes to the hardware according to the list "COMMUNICATION BETWEEN SYSCON AND HARDWARE" in section 4 of this manual. Some of these commands may immediately be overwritten by the system controller (i.e. time settings when the recorder is in reproduce mode). Then the argument {r} can be added to repeat the command. "addr" must be an odd address.

SHOW status/gains/quality {codec testmode}/crc 1..8/rt

SHOW displays Syscon variables repetitively. The argument permits a choice of the following options:

status: errors, parameters, flags
gains: gain values for cal-, uncal- and headroom gains
quality: signal quality counters
crc: CRC errors of single tracks
rt: control word of reference track (up to 16 bits) and channel status bytes (one each) of digital in- and output (AES/EBU-type).

The option "quality" has an additional argument for Codec test mode (see chapter "COMMUNICATION BETWEEN SYSCON AND HARDWARE" for a detailed description of the Codec test modes in section 4 of this manual).

Examples: >SHOW s displays Syscon status
>SHOW q 7F displays quality counters in Codec repro-loop
>SHOW crc 3 displays CRC errors of track 3

STTY 9600/1200/300

The baudrate of the RS-232 output labeled "Test" can be set to the following standard values:

9600 default setting for terminal emulation
1200 used for cassette tape loading or save (streamer mode)
300 used for modem emulation via telephone line

¹ VCXO: voltage controlled crystal oscillator

- SWEEP 0..125(o/oo)** The varispeed deviation is modulated by a software LFO (low frequency oscillator) in the specified range (max +/- 12.5 %), until a key is pressed. The modulation speed is approx. 5 seconds.
- TANDEM {on/off}** The functions SAFE, READY, INPUT and REPRO are operated simultaneously for both main channels when activated.
- TAPESPEED {data}** Used to simulate tape speed values to check switching behavior of hardware. Data is defined as an integer value from 0...1500. The D820X uses two distinct tape speeds to switch resonators, gains, etc.: 50 cm/sec. and 1 m/sec.
Example: >TAPESPEED 1000 : tape speed 1 m/sec. selected
- TASK {stop/run} {task_name}** The software of the D820X Syscon is written in a multitasking environment in order to support debugging operations of software or hardware. Since one or more (usually running) tasks can be stopped, faults can be traced more easily within the system. Below is a brief description of the tasks that can be controlled by means of this command:
- SYSCO: checks system status, timing, battery and controls access to the command processor.
SSDA: communicates with the master CPU.
LQDSP: processes data for the level and quality displays.
TMDSP: processes data for the time displays.
RFTRK: handles RT data and controls RT Codec.
TCTRK: handles TC data and controls TC Codec.
AESIF: handles DI/DO data and controls the digital interface.
DPPAN: controls the Display panel.
CCPAN: controls the Channel Control panel.
MCPAN: controls the Monitor panel.
TDMON: controls the Tape Deck Monitor unit.
- Example:** >TASK STOP RFTRK : disables execution of the reference track task
>TASK RUN : enables execution for all tasks
>TASK : displays status of all tasks
- TCDISPLAY time/user/flags** Selects time code display mode. The actual display mode must have been set to time code (see TIMEMODE).
- time : tc time
user : tc user data bytes
flags : tc flags (f1, f2, f3, f4)
- TCFRAME {25/29/30}** Sets TC delay according to the selected tc frame rate.
Example: >TCFRAME 29 : sets TC delay to 29.97 frm/sec.
>TCFRAME : displays the selected TC frame rate.

TCMODE {unmodulated/modulated/auto}

The D820X modulates TC in record mode and sets a flag in the RT control word to indicate that TC is modulated. To be compatible with other tapes where TC has been recorded with the conventional bias method, the D820X reads the flag in the RT control word and configures the TC demodulator circuit to the appropriate mode when in auto mode. This mode can be overwritten manually to <unmod> (unmodulated) or <mod> (modulated). Overriding may be necessary if the information contained in the RT control word does not correspond to the actual recording method (restripping of TC only by a recorder with a different recording method, etc.).

Example:

>TCMODE unmod: discards the TC mod flag in the RT control word and selects unmodulated mode.
 >TCMODE: displays the actual mode.

TIMEMODE movetimer/watch/rt/tc

Selects the actual time display mode:

move: tape move counter (tape time from move roller)

watch: relative tape move counter

rt: reference track time

tc: time code (see also TCDISPLAY)

VARISPEED {on/off}

VARISPEED mode is active only if the masterclock is set to internal clock reference (see command MASTERCLOCK).

VARIDEV {+/- 125(0/00)}

Is used to set the deviation in varispeed mode. The deviation range is +/- 12.5%. Data for deviation is entered as follows:

varispeed deviation:	data:
- 12.5 %	- 125
0.0 %	+ 0
+ 12.5 %	+ 125

Example: >VARIDEV - 75: sets the varispeed deviation to - 7.5 %

WATCH {run/stop}

Emulates watch control mode. The counting mode can be enabled with command "run" or stopped.

Table of Contents Section 3: Communication Between SYSCON and Hardware

3.1	ELECTRONICS CAGE 1.861.300	2
3.1.1	DETECTOR 1.861.804/1.861.809	2
3.2	DISPLAY PANEL, REMOTE DISPLAY PANEL 1.861.555	6
3.2.1	DISPLAY PROCESSOR 1.861.742	6
3.3	ELECTRONICS BOX 1.861.320.00	9
3.3.1	GAINS CONTROL 1.861.853.00	9
3.3.2	CODEC CONTROL 1.861.857.00	14
3.3.3	TIMING AND TEST 1.861.862.00	16
3.3.4	RT/TC CODEC 1.861.861/761	21
3.3.5	ANALOG INPUT 1.861.752/753	29
3.3.6	ANALOG OUTPUT 1.861.751.00	30
3.4	ELECTRONICS RACK 1.861.310.00	31
3.4.1	PDM CONTROL 1.861.813.00	31
3.5	CHANNEL CONTROL PANEL 1.861.370.00	35
3.6	MONITOR PANEL 1.861.365.00	38

3 Communication Between SYSCON and Hardware

Sn 148903

REV.: 23855 /ENCDELAY ACTIVE LOW
 REV.: 12856 /ENCDELAY ACTIVE HIGH
 /PRESENT BIT DETECTOR
 /ELOOP1 ACTIVE LOW
 /VTOPDM, VFROMPDM DELETED
 /PRESENT BIT PDM CONTROL GETS ADDRESS A0H
 REV.: 13856 /TDSMUTE, MPSMUTE ACTIVE LOW
 REV.: 14856 /MPSMUTE, PLACED TO BIT 1
 REV.: 2857 /MAJOR REVISION (FIFTH): T+T, PDM, CODEC, DAPRO
 REV.: 18859 /T+T, SEVERAL ERRORS ACC. TO DS, RT/TC CODEC
 REV.: 158511 /RT, TC, EMPH HANDLING DI/DO, GAINS CONTROL: DI/DO,
 DETECTOR: TC/CUE-BIT, T+T: TTLOCK ETC., FS HANDLING, ERROR
 TYPES, COSMETICS
 REV.: 218511 /DEF DI (UNLOCK), TC DOPFRAME + COLORFLAG, DEF RTSYNC
 REV.: 298511 /TC SEQ, TC DISP, TC VALID, DEF VARI, TDPRES
 REV.: 248601 /HISPD PDM, BULB COMMANDS CCP, TC DISPLAYS, DEF. /DIEMPH/
 DEF. /RECORDXF/, VCXOHI, TERMINAL DISPLAYS
 REV.: 068602 /DISPL. TYPES, TC BITS DETECTOR, TCMOD, TCSPEED, MCVASP2,
 C0...C3
 REV.: 288605 /RT SYNC TABLE, DPCLIPP, ADCLIPP, EMPHASIS, CODEC: BYTE 70H
 AND BURST 4 (221 BLOCKS) AND DEF TRACKLOSS (<=1 TRK),
 TCMOD
 REV.: 238606 /SQ-DISPLAYS (INT2/INT1 EXCHANGED), DESCRIPTION OF CODEC
 ERROR SIMULATION
 REV.: 078610 /TDMON1...5, DESC. TC VALIDITY, PRESENT BIT MONITOR PANEL,
 TERMINAL DISPLAYS
 REV.: 158610 /HISPD, S/R CONCEPT, MVARI
 REV.: 058612 /RECCUR, LEVEL DISPLAY MODES, FADER CONCEPT, EMPHASIS,
 TRANSFER TO CMS
 REV.: 088612 /AUXTRKFO (USE OF AUX TRACKS)
 REV.: 118612 /CHANGES EMPHASIS AND FADER
 REV.: 078701 /VIDEO/FILM-CLOCKS VS. FS
 REV.: 138701 /HISPD PDM
 REV.: 028702 /FADER START DEF., EMPH IN SINGLE TRK RECORDING, IREC
 REV.: 208707 /EE1L/R, ADDR. E FOR REMOTE DP, COMMENTS
 REV.: 098709 /ARPOFF, ICLRARP, HOLDARP
 REV.: 128801 /NEW DEF FOR MASSA (PWRDET), ADAPT RUN PROCESSOR
 CONTROL DEFINITION, NEW DEF FOR RECORD CURRENT,
 /PWRDET/ REPLACES /LOSPD/
 REV.: 088803 /NEW DEF. FOR C0...C3, TXTCMOD
 REV.: 028805 /ARP FEEZE MODES, RT SEQUENCING, TCDELAY, DIAGNOSTIC
 SCREENS, C0...C3, INTIALIZATION OF WRITE AMPLIFIER
 REV.: 078806 /DEF. REHEARSE & EE1, DEF. TCDELAY
 REV.: 158806 /TC DELAYS
 REV.: 288806 /EMPHASIS HANDLING (PLAY MODE + DI, CONSUMER MODE)
 REV.: 218809 /FS SELECTION FOR TC OUTPUT DELAY /FSTC/
 REV.: 118810 /DEF. TTLOCK
 REV.: 248901 /REVISED DEF. OF RT SYNC, DIAGNOSTIC SCREEN 4 (SH R)
 REV.: 148903 /DEF. MASTERING DELAY

ERROR TYPES: A TEMPORARILY DISPLAYED (TOGETHER WITH ERROR)
 B WITH ACKNOWLEDGE (PRESS "STORE")
 C REMAINING MESSAGE (NEEDS NEW POWER-UP)

WARNING TYPES: NOT IMPLEMENTED.

**3.1
ELECTRONICS CAGE 1.861.300**

**3.1.1
DETECTOR 1.861.804/1.861.809**

COBUS: RX, TX (8BTRMEX, 8BRECEX)

THIS BOARD SUPPLIES - PB AMPLIFIER 1.861.801/1.861.808
 - TD MONITOR 1.861.802
 - WRITE AMPLIFIER 1.861.803

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	1	SAFECH1	SAFE TRK 1A, 2A, 3A, 4A ENABLE WITH SAFE/READY
2	1	SAFECH2	SAFE TRK 1B, 2B, 3B, 4B ENABLE WITH SAFE/READY
3	1	SAFEAUX1	SAFE AUX1 (TC) ENABLE WITH SAFE/READY
4	1	SAFEAUX2	SAFE AUX2 (RT) AS POS 1,2 EXCEPTION: SEE \$
5	1	SAFEAUX3	SAFE AUX3 (CUE R,EXT), SEE \$\$
6	1	SAFEAUX4	SAFE AUX4 (CUE L,MIX) SIMILAR TO POS. 1, 2
7	1	MASSA	MASTER SAFE, AFFECTS ALL TRACKS, ENABLES K
8	8	RECCUR	RECORD CURRENT, RELATIVE CURRENT
9	1	TDSMUTE	TAPE DECK SPEAKER MUTED
10	2	EE1	EE LOOP 1, WRITE AMPLIFIER TO DETECTOR
11	1	TDMON1	INPUT/TAPE
12	1	TDMON2	TC
13	1	TDMON3	DIGITAL/CUE
14	1	TDMON4	1/MIX
15	1	TDMON5	2/AUX
16	1	PRESENT	DETECTOR PRESENT
17	1	PWRDET	POWER-DOWN/UP K FOR COMPARATORS ON DETECTOR
18	1	HISPD	AUX 1, 3, 4: REDUCED GAIN (TS >50 cm/sec.)
19	1	TDMPRES	TAPE DECK MONITOR PRESENT
20	4	C0...3	RESONATOR SELECTION ACC. TO MOD/UNMOD/HI SPD

KEYBOARD TAPE DECK MONITOR:

* INPUT * DIGITAL *
 * * * * * *
 VOLUME TAPE TC CUE 1/MIX 2/AUX

NOTES: POS. 1,2 CONTROLLED BY MASTER SAFE, REHEARSE AND SAFE/READY
 \$ RT W AFTER TIME DELAY IF REC AND NO RT R (MESSAGE TO LCD) POS. 4
 CONTROLLED BY MASTER SAFE, REHEARSE, RT SYNC AND
 SAFE/READY CONFIGURATION.
 \$\$ SIMILAR TO POS. 1,2 IF NO MIX. IF MIX: ACCORDING TO SAFE/READY
 CONFIGURATION.

TX ONLY (FROM TD MONITOR):

TDMON1...5, PRESENT			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
1 (10H)	TDMON1	TAPE, ELSE INPUT		X	X	X	X	X	X	X	0
	TDMON2	TC, ELSE INPUT OR TAPE		X	X	X	X	X	X	0	X
	TDMON3	CUE, ELSE DIGITAL		X	X	X	X	X	0	X	X
	TDMON4	CH1 OR MIX ON, ELSE OFF		X	X	X	X	0	X	X	X
	TDMON5	CH2 OR AUX ON, ELSE OFF		X	X	X	0	X	X	X	X
	PRESENT	DETECTOR PRESENT		0	X	X	X	X	X	X	X
	TDMPRES	TAPE DECK MONITOR PRESENT		X	0	X	X	X	X	X	X

WRITE AMPLIFIER 1.861.803

POS	BITS	COMMAND	DESCRIPTION
1	1	SAFECH1	SAFE TRK 1A, 2A, 3A, 4A ENABLE WITH SAFE/READY
2	1	SAFECH2	SAFE TRK 1B, 2B, 3B, 4B ENABLE WITH SAFE/READY
3	1	SAFEAUX1	SAFE AUX1 (TC) ENABLE WITH SAFE/READY
4	1	SAFEAUX2	SAFE AUX2 (RT) AS POS 1, 2 EXCEPTION: SEE \$
5	1	SAFEAUX3	SAFE AUX3 (CUE R, EXT), SEE \$\$
6	1	SAFEAUX4	SAFE AUX4 (CUE L, MIX) SIMILAR TO POS. 1, 2
7	1	MASSA	MASTER SAFE, AFFECTS ALL TRACKS, ENABLES K
8	8	RECCUR	RECORD CURRENT

MASSA, SAFEAUX1 . . . 4, SAFECH1, 2

BYTE NO	SIG NAME	DESCRIPTION	MSB										
			BITS	7	6	5	4	3	2	1	0		
1 (11H)	SAFECH1	SAFE CH 1		X	X	X	X	X	X	X	X	X	1
	SAFECH2	SAFE CH 2		X	X	X	X	X	X	X	1	X	X
	SAFEAUX1	SAFE AUX 1 (TC)		X	X	X	X	X	1	X	X	X	X
	SAFEAUX2	SAFE AUX 2 (RT)		X	X	X	X	1	X	X	X	X	X
	SAFEAUX3	SAFE AUX 3 (CUE R, EXT)		X	X	X	1	X	X	X	X	X	X
	SAFEAUX4	SAFE AUX 4 (CUE L, MIX)		X	X	1	X	X	X	X	X	X	X
	MASSA	MASTER SAFE, ALL TRKS, K ENABLED (\$)		X	1	X	X	X	X	X	X	X	X

RECCUR

BYTE NO	SIG NAME	DESCRIPTION	MSB										
			BITS	7	6	5	4	3	2	1	0		
2 (13H)	RECCUR	RECORD CURRENT: MIN OFFSET (-44)		0	0	0	0	0	0	0	0	0	0
		RECORD CURRENT: NO OFFSET (0)		0	0	1	0	1	1	0	0	0	0
		RECORD CURRENT: MAX OFFSET (+88)		1	0	0	0	0	1	0	0	0	0

- NOTE:** DEFINITION OF SAFE/READY CONCEPT SEE PAR. 5.
- NOTE \$:** DEFINITION OF /MASSA/: /MASSA/ IS HI (K ENABLED) IN ALL TAPE DECK MODES EXCEPT RECORD MODE, IF AND ONLY IF THE COMMAND "MASTERSAFE" IS NOT ACTIVATED. OTHERWISE, /MASSA/ IS ALWAYS HI.

NOTE ON INITIALIZATION OF WRITE AMPLIFIER:
 SYSCON TRANSMITS DATA BFH AND FFH TO ADDRESS 11H DURING INITIALIZATION (EXACT TIME NOT CRITICAL). WHEN HARDWARE READS BOTH ADDRESSES, THE MASTERSAFE RELAY AND THE WRITE PULSES TO THE HEAD ARE ENABLED IN PRINCIPLE, HOWEVER, DUE TO DATA BFH & FFH, THE WRITE AMPLIFIER IS STILL IN SAFE MODE. FROM THIS MOMENT, BYTE 11H IS UNDER SOFTWARE CONTROL. BEFORE, PROTECTION CIRCUITRY HAS PREVENTED THE HEAD FROM ACCIDENTALLY APPLIED CURRENT WHICH COULD CAUSE DEGRADED DATA DURING POWER-UP. WRITE AMPLIFIERS WITH REVISION LEVEL -21 MAY BE ACTIVE ON CERTAIN TRACKS DURING THE SHORT TIME BEFORE BYTE BFH HAS BEEN TRANSMITTED AND COULD CAUSE DEGRADED DATA AFTER MULTIPLE POWER-UP'S AT THE SAME SPOT ON TAPE.

PB AMPLIFIER 1.861.801/808

POS	BITS	COMMAND	DESCRIPTION
1	1	PWRDET	POWER-DOWN/UP K FOR COMPARATORS ON DETECTOR
2	1	HISPD	AUX 1, 3, 4: REDUCED GAIN (TS >50cm/sec.)
3	4	C0 . . . 3	RESONATOR SELECTION ACC. TO MOD/UNMOD/HISPD

PWRDET, HISPD, C0 . . . 3

BYTE NO	SIG NAME	DESCRIPTION	MSB									
			BITS	7	6	5	4	3	2	1	0	
3 (17H)	PWRDET	POWER-DOWN MODE (NOTE \$\$)		X	X	X	X	X	X	1	X	X
	HISPD	GAIN ADJUSTED FOR TS >50cm/sec.		X	X	X	X	X	1	X	X	
	C0	UNMODULATED, HIGHSPEED (>50cm/sec.)		X	1	1	1	0	X	X	X	
	C1	UNMODULATED, LOWSPEED (<=50cm/sec.)		X	1	1	0	1	X	X	X	
	C2	MODULATED, HIGHSPEED (>50cm/sec.)		X	1	0	1	1	X	X	X	
C3	MODULATED, LOWSPEED (<=50cm/sec.)		X	0	1	1	1	X	X	X		

C 3 2 1 0

TABLE FOR C0...C3 AND HISPD:

HISPD	C0	C1	C2	C3	PLAINTEXT
1	0	1	1	1	UNMODULATED, HIGHSPEED
0	1	0	1	1	UNMODULATED, LOWSPEED
1	1	1	0	1	MODULATED, HIGHSPEED
0	1	1	1	0	MODULATED, LOWSPEED

C0, C1, C2, C3: ACTIVE LOW

NOTE \$\$: POWER-DOWN MODE IF NOT PLAY AND/OR RECORD MODE.

DETECTOR 1.861.804/809

POS	BITS	COMMAND	DESCRIPTION
1	1	EE1L	EE LOOP 1, CH1, LEFT MAIN CHANNEL (S. DEF. BEL.)
2	1	EE1R	EE LOOP 1, CH2, RIGHT MAIN CHANNEL (S. DEF. BEL.)

EE1L, EE1R		MSB									
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
1 (11H)	EE1R	EE LOOP 1 ON, CH 2		0	X	X	X	X	X	X	X
3 (17H)	EE1L	EE LOOP 1 ON, CH 1		0	X	X	X	X	X	X	X

TD MONITOR 1.861.802

POS	BITS	COMMAND	DESCRIPTION
1	1	TDSMUTE	TAPE DECK SPEAKER MUTED, SEE \$\$\$

TDSMUTE		MSB									
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
3 (17H)	TDSMUTE	TAPE DECK SPEAKER MUTED, SEE \$\$\$		X	X	X	X	X	X	X	0

NOTE \$\$\$: MONITOR SPEAKER MUTING MODES:

- 1 POWER-UP
- 2 MAINMUTE
- 3 SPEAKER OFF/ON

FOR DEF. OF MUTING MODES WITH FADER START SEE PAR. 6 MONITOR PANEL

FOR DEF. OF AUTOMUTE, AUTOEDIT, AUTOINPUT SEE PAR. 4.1 PDM CONTROL

DEF. OF REHEARSE, EE2 AND EE1:

1. REHEARSE IS MADE WITH EE4. SINGLE CHANNEL OPERATION POSSIBLE, LOCAL & REMOTE. CONTROLLED BY INPUT/REPRO/SAFE /READY KEYS. DELAYS: 1.5 WORDS INPUT PLUS 6.5 WORDS OUTPUT. AUDIBLE CLICKS MAY OCCUR UNDER EDITOR CONTROL, WHEN PATTERNS DO NOT MATCH (NO CROSSFADE CAPABILITIES IN EE4).
2. EE2: USED FROM REMOTE PORTS. ASCII COMMANDS SRH AND CRH ARE INTERPRETED AS EE2 ENABLE/DISABLE. STEREO OPERATION ONLY! DELAYS:
 INPUT = 5 BLOCKS + 1.5 WORDS + (161.5 BLOCKS AVERAGE ENCODING)
 OUTPUT = 77 BLOCKS + 6.5 WORDS + (161.5 BLOCKS AVERAGE DECODING).
 NO LOCAL OPERATION PROVIDED. RED LED "TEST" ILLUMINATED WHEN EE2 IS ACTIVATED EITHER FROM TERMINAL (SYSCON PORT) OR LOCAL (TEST MENU), OTHERWISE (FROM SERIAL REMOTE PORTS): NOT ILLUMINATED.

3. EE1: TEST LOOP ONLY. LOCAL AND REMOTE CONTROL. ADAPTIVE RUN PROCESSOR IN TRANSPARENT MODE (/ARPOFF/). SINGLE CHANNEL OPERATION POSSIBLE WITH RESTRICTED CAPABILITIES (DANGEROUS!). /RTSYNC/ MANDATORY WHEN OFF-TAPE DATA IS INVOLVED. PRINCIPALLY, TBC CONTROL SIMULTANEOUSLY BOTH FROM TAPE AND DIRECT VIA EE1 IS NOT POSSIBLE. WRITE AND READ BLOCKADDRESSES DO NOT MATCH WHEN EXCESSIVE SPEED DEVIATIONS OCCUR (I.E. DURING START-UP AND STOP). GLOBAL COMMAND EE1 FROM TERMINAL OR MENU AFFECTS BOTH CHANNELS. EE1L AND EE1R ARE NOT ACCESSIBLE TO USERS FROM PERIPHERY. "SEND" COMMANDS TO BYTES 11 AND 17 ARE REQUIRED. RED LED "TEST" ILLUMINATED IF EE1 ACTIVATED FROM PERIPHERY OR LOCAL. MORE INFO: REF. TO /RTSYNC/ AND PAR. "SINGLE CHANNEL RECORDING".

**3.2
DISPLAY PANEL, REMOTE DISPLAY PANEL 1.861.555**

**3.2.1
DISPLAY PROCESSOR 1.861.742**

COBUS: RX, TX (8BRECEX, 8BTRMEX)
 THIS BOARD SUPPLIES - KEYBOARD DISPLAY 1.861.741
 - DISPLAY IF 1.861.817

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	8	TIMEINF0	VALUE OF TIMER DISPLAY (PROCESSED, BCD), A
2	8	TIMEINF1	VALUE OF TIMER DISPLAY (PROCESSED, BCD), F
3	8	TIMEINF2	VALUE OF TIMER DISPLAY (PROCESSED, BCD), F
4	8	TIMEINF3	VALUE OF TIMER DISPLAY (PROCESSED, BCD), F
5	8	TIMEINF4	VALUE OF TIMER DISPLAY (PROCESSED, BCD), S
6	8	TIMEINF5	VALUE OF TIMER DISPLAY (PROCESSED, BCD), S
7	8	TIMEINF6	VALUE OF TIMER DISPLAY (PROCESSED, BCD), M
8	8	TIMEINF7	VALUE OF TIMER DISPLAY (PROCESSED, BCD), M
9	8	TIMEINF8	VALUE OF TIMER DISPLAY (PROCESSED, BCD), H
10	8	TIMEINF9	VALUE OF TIMER DISPLAY (PROCESSED, BCD), H
11	8	DPGAINL	GAIN INFO LEFT
12	8	DPGAINR	GAIN INFO RIGHT
13	8	DPLVLCH1	LEVEL DISPLAY CH1
14	8	DPLVLCH2	LEVEL DISPLAY CH2
15	2	DPCLIPP	CLIPPING INFORMATION
16	8	QUALDISL	SIGNAL QUALITY DISPLAY DATA (PROCESSED), LEFT
17	8	QUALDISR	SIGNAL QUALITY DISPLAY DATA (PROCESSED), RIGHT
18	6	BULBSTA1	STATUS DISPLAY PANEL LAMPS
19	6	BULBSTA2	STATUS DISPLAY PANEL LAMPS
20	8	KEYSTAT1	STATUS OF DISPLAY PANEL KEYS
21	6	KEYSTAT2	STATUS OF DISPLAY PANEL KEYS
22	1	PRESENT	DISPLAY PANEL PRESENT

POS 1...10: FORMATTING TIMER INFORMATION:

TIMEINF:	0	9	8	7	6	5	4	3	2	1
INDICATION:	A	I	H1	M2	M1	S2	S1	F3	F2	F1
ADDRESSES:	49	47	45	43	41	39	37	35	33	31

I = SIGN(-)
 F = MSEC/FR
 A = TIME MODE INDICATOR
 () TIMER
 (I) WATCH (LAP)
 (r) RT
 (t) TC

TX ONLY:

KEYSTAT1 BYTE NO	SIG NAME	DESCRIPTION	MSB								
			BITS	7	6	5	4	3	2	1	0
1 (6CH) (ECH)	DPTIME	KEY TIME		X	X	X	X	X	X	X	0
	DPWATCH	KEY WATCH		X	X	X	X	X	X	0	X
	DPRESET	KEY RESET		X	X	X	X	X	0	X	X
	DPSTOP	KEY STOP		X	X	X	X	0	X	X	X
	DPHEADR	KEY HEADROOM		X	X	X	0	X	X	X	X
	DPPEAK	KEY PEAK		X	X	0	X	X	X	X	X
	DPCALG	KEY CAL GAINS		X	0	X	X	X	X	X	X
	DPUNCAL	KEY UNCAL GAINS		0	X	X	X	X	X	X	X

KEYSTAT2, PRESENT			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
2 (6AH)	PRESENT	DISPLAY PANEL PRESENT		X	X	X	X	X	X	X	0
(EAH)	DPDIGIT	KEY DIGITAL/ANALOG (ANALOG=1)		X	X	X	X	X	0	X	X
	DPINPUT	KEY INPUT/OUTPUT (OUTPUT=1)		X	X	X	X	0	X	X	X
	DPLEFT	KEY CH 1		X	X	X	0	X	X	X	X
	DPRIGHT	KEY CH 2		X	X	0	X	X	X	X	X
	DPLVLUP	KEY UP		X	0	X	X	X	X	X	X
	DPLVLDWN	KEY DOWN		0	X	X	X	X	X	X	X

NOTE: ADDRESS 6 VALID FOR INTERNAL DISPLAY PANEL, ADDRESS E FOR EXTERNAL DISPLAY PANEL (JUMPER SELECTABLE).

EXTERNAL DP HANDLING: RECEIVE ADDRESSES FOR BOTH PANELS IDENTICAL. THE LAST TX SETTING IS VALID.

RX:

TIMEINF0...9			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
1 (31H)	TIMEINF1	TIMER DIGIT F1		M	B	B	B	B	B	B	L
2 (33H)	TIMEINF2	TIMER DIGIT F2		M	B	B	B	B	B	B	L
3 (35H)	TIMEINF3	TIMER DIGIT F3		M	B	B	B	B	B	B	L
4 (37H)	TIMEINF4	TIMER DIGIT S1		M	B	B	B	B	B	B	L
5 (39H)	TIMEINF5	TIMER DIGIT S2		M	B	B	B	B	B	B	L
6 (41H)	TIMEINF6	TIMER DIGIT M1		M	B	B	B	B	B	B	L
7 (43H)	TIMEINF7	TIMER DIGIT M2		M	B	B	B	B	B	B	L
8 (45H)	TIMEINF8	TIMER DIGIT H1		M	B	B	B	B	B	B	L
9 (47H)	TIMEINF9	TIMER DIGIT I		M	B	B	B	B	B	B	L
10 (49H)	TIMEINF0	TIMER DIGIT A		M	B	B	B	B	B	B	L

DPGAINL			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
11 (4BH)	DPGAINL	GAIN INFO (ANA./DIGI./HEADROOM) LEFT RANGE: ANALOG GAINS=0...200 DIGITAL GAINS=0...160 HEADROOM =0...20		M	B	B	B	B	B	B	L

DPGAINR			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
12 (4DH)	DPGAINR	GAIN INFO (ANA./DIGI./HEADROOM) RIGHT RANGE: ANALOG GAINS=0...200 DIGITAL GAINS=0...160 HEADROOM =0...20		M	B	B	B	B	B	B	L

NOTE: DPGAINL AND DPGAINR ARE SELECTED ACCORDING TO BULBSTA. STATUS BYTES:

ANALOG LEVELS:	INPUT CH1	INPUT CH2	OUTPUT CH1	OUTPUT CH2
DIGIT. LEVELS:	INPUT CH1	INPUT CH2	OUTPUT CH1	OUTPUT CH2
HEADROOM	: INPUT CH1	INPUT CH2	OUTPUT CH1	OUTPUT CH2

DPLVLCH1			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
13 (61H)	DPLVLCH1	LEVEL DATA CH 1 (BARGRAPH) RANGE: 00...FF		7	6	5	4	3	2	1	0

DPLVLCH2			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
14 (63H)	DPLVLCH2	LEVEL DATA CH 2 (BARGRAPH) RANGE: 00...FF		7	6	5	4	3	2	1	0

LEVEL DISPLAY MODES:

A NORMAL: ACCORDING TO INPUT REPRO KEYS ON CCP.

B INPUT : AS AUTOINPUT FOR AUDIO: DISPLAY SET TO INPUT IN STOP MODE.

DPCLIPP1,2			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
15 (65H)	DPCLIPP1	CLIPPING INFO CH 1 ON		X	X	X	X	X	X	X	1
	DPCLIPP2	CLIPPING INFO CH 2 ON		X	X	X	X	X	X	1	X

QUALDISL			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
16 (67H)	QUALDISL	SIG QUAL CH1 (GRN) QP1 CORRECTION		0	0	0	0	0	0	0	1
		SIG QUAL CH1 (GRN) QP2 CORRECTION		0	0	0	0	0	0	1	0
		SIG QUAL CH1 (GRN) FINGERPRINT		0	0	0	0	0	1	0	0
		SIG QUAL CH1 (GRN) TRACKLOSS		0	0	0	0	1	0	0	0
		SIG QUAL CH1 (YEL) INTERPOLATION 2		0	0	0	1	0	0	0	0
		SIG QUAL CH1 (YEL) INTERPOLATION 1		0	0	1	0	0	0	0	0
		SIG QUAL CH1 (RED) MUTE		0	1	0	0	0	0	0	0
		SIG QUAL CH1 (RED) NO DATA		1	0	0	0	0	0	0	0

QUALDISR			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
17 (69H)	QUALDISR	SIG QUAL CH2 (GRN) QP1 CORRECTION		0	0	0	0	0	0	0	1
		SIG QUAL CH2 (GRN) QP2 CORRECTION		0	0	0	0	0	0	1	0
		SIG QUAL CH2 (GRN) FINGERPRINT		0	0	0	0	0	1	0	0
		SIG QUAL CH2 (GRN) TRACKLOSS		0	0	0	0	1	0	0	0
		SIG QUAL CH2 (YEL) INTERPOLATION 2		0	0	0	1	0	0	0	0
		SIG QUAL CH2 (YEL) INTERPOLATION 1		0	0	1	0	0	0	0	0
		SIG QUAL CH2 (RED) MUTE		0	1	0	0	0	0	0	0
		SIG QUAL CH2 (RED) NO DATA		1	0	0	0	0	0	0	0

QUALDISL (67H)								QUALDISR (69H)							
80	40	20	10	08	04	02	01	01	02	04	08	10	20	40	80

NOTE: FOR THE COMPOSITION OF SQ-DATA SEE PAR. 3.2, CODEC CONTROL.

BULBSTA1			BITS							
BYTE NO	SIG NAME	DESCRIPTION	7	6	5	4	3	2	1	0
18 (6BH)	TIME	BULB TIME ON	X	X	X	X	X	X	X	1
	WATCH	BULB WATCH ON	X	X	X	X	X	X	1	X
	HEADROOM	BULB HEADROOM ON	X	X	X	1	X	X	X	X
	PEAK	BULB PEAK ON	X	X	1	X	X	X	X	X
	CALG	BULB CAL GAINS ON	X	1	X	X	X	X	X	X
	UNCALG	BULB UNCAL GAINS ON	1	X	X	X	X	X	X	X

BULBSTA2			BITS							
BYTE NO	SIG NAME	DESCRIPTION	7	6	5	4	3	2	1	0
19 (6DH)	ANALOG	BULB ANALOG ON	X	X	X	X	X	1	X	X
	OUTPUT	BULB OUTPUT ON	X	X	X	X	1	X	X	X
	CH1	BULB CH1 ON	X	X	X	1	X	X	X	X
	CH2	BULB CH2 ON	X	X	1	X	X	X	X	X
	DIGITAL	BULB DIGITAL ON	X	1	X	X	X	X	X	X
	INPUT	BULB INPUT ON	1	X	X	X	X	X	X	X

3.3 ELECTRONICS BOX 1.861.320.00

3.3.1 GAINS CONTROL 1.861.853.00

COBUS: RX, TX (8BRECEX, 8BTRMEX)

THIS BOARD SUPPLIES	- DAPRO-IF	1.861.854.00
	- DATA PROCESSOR	1.861.855.00
	- COEFFICIENT GENERATOR	1.861.856.00
	- ANALOG OUTPUT	1.861.751.00
	- ANALOG INPUT	1.861.752.00

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	5	DPGNADR	DIGITAL GAIN ADDRESS (MAY BE REDUCED TO 3BITS)
2	8	DPDIGGN	DIGITAL GAIN (VALUE)
3	1	MAINMUTE	HARD OUTPUT MUTE, TO ANA IN- AND OUTPUT
4	1	REPMUTE1	REPRO OUTPUT MUTE (SOFT), CH 1
5	1	REPMUTE2	REPRO OUTPUT MUTE (SOFT), CH 2
6	1	HPFILOFF	SELECT HIGH PASS ON/OFF
7	1	EELOOP5	EE LOOP 5, BEFORE DAPRO
8	1	ADCAES	SELECT INPUT FROM ADC OR DIGITAL INPUT
9	1	PREVIEW	SELECT PREVIEW DELAY/NORMAL (NORMAL OUTPUT)
10	1	EMPHASIS	EMPHASIS ON/OFF, TO ANA IN- AND OUTPUT AND DO
11	1	DISREP1	DISPLAY SELECT (1=REPRO, 0=INPUT), CH 1
12	1	DISREP2	DISPLAY SELECT (1=REPRO, 0=INPUT), CH 2
13	2	DPCLIPP	DIGITAL CLIPPING INFORMATION
14	8	DPLVLCH1	LEVEL DISPLAY CH1
15	8	DPLVLCH2	LEVEL DISPLAY CH2
16	1	PRESENT	GAINS CONTROL PRESENT
17	2	PUNCH	PUNCH FADER (TOGGLE FUNCTION), CH1/2 (NOTE #)
18	8	QUALITY	SIGNAL QUALITY INFO (INT1/2, MUTE, SPLICE)
19	8	DIEMPH	AES/EBU BYTE 00 TO SYSCON, DIGITAL INPUT
20	8	DDEMPH	AES/EBU BYTE 00 FROM SYSCON, DIGITAL OUTPUT
21	1	DAPROSYN	SYNC FOR DAPRO IF AND DATA PROCESSOR
22	1	AESPLL	DIGITAL INPUT PLL LOCK/UNLOCK
23	1	TSHI/LO	TAPE SPEED (LO=32kHz) TO AES PLL
24	2	ADCLIPP	CLIPPING INFORMATION ANALOG INPUT
25	1	INSERT	ANALOG MASTERING: DELAY INSERTION

COMMAND SEQUENCING:

- GAIN: FIRST 2 BYTES: A A A A S S S I G G G G G G G G
 SECOND 2 BYTES: A A A A T T T I D D D D D D D D
 A = DEVICE ADDRESS (ALWAYS 5H)
 S = SUBDEVICE ADDRESS
 I = LO, IF TX (RELATED TO HARDWARE)
 G = GAIN ADDRESS, ADDRESSES GAIN BLOCK (00H, 01H, 02H, 10H, 11H, 12H),
 DPGNADR
 T = (SUBDEVICE ADDRESS + 1)
 D = LEVEL DATA, RANGE 40...255), DPDIGGN

EXAMPLE: FIRST 2 BYTES: | 57H | 00H |
 SECOND 2 BYTES: | 59H | DFH |

NOTE: DIGITAL REPRO CH1 OR CH2 (02H, 12H) AND DIGITAL SYNC CH1 OR CH2 (01H, 11H) TO BE ADDRESSED SIMULTANEOUSLY IN ORDER TO ADJUST DIGITAL OUTPUT GAINS.

NOTE: POS. 14 DISREP1/2: DEPENDING ON PLAY STATUS. THEN TO REPRO, ELSE INPUT.

NOTE: COMMANDS /SPOTERAS/, /3HEAD/ ARE HARDWIRED IN D820X. /3HEAD/ IS IMPLEMENTED.

NOTE #: /PUNCH/ IS STILL HARDWIRED BUT NOT USED IN D820X.

TX ONLY:

DPLVLCH1			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
1 (50H)	DPLVLCH1	LEVEL DATA CH 1 (BARGRAPH)		7	6	5	4	3	2	1	0

DPLVLCH2			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
2 (52H)	DPLVLCH2	LEVEL DATA CH 2 (BARGRAPH)		7	6	5	4	3	2	1	0

DPCLIPP, PRESENT			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
3 (54H)	DPCLIPP1	CLIPPING INFO CH 1 ON (DIGITAL)		X	X	X	X	X	X	X	1
	DPCLIPP2	CLIPPING INFO CH 2 ON (DIGITAL)		X	X	X	X	X	X	1	X
	AESPLL	AES PLL UNLOCK		X	X	X	X	1	X	X	X
	PRESENT	GAINS CONTROL PRESENT		X	X	X	X	X	0	X	X

QUALITY			MSB									
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0	
4 (56H)	QUALITY	MUTING ON CH 1		X	X	X	X	X	1	X	X	
		SPLICE ON CH 1		X	X	X	X	1	X	X	X	
		INTERPOLATION 2ND GRADE CH 1		X	X	X	X	X	X	1	X	
		INTERPOLATION 1ST GRADE CH 1		X	X	X	X	X	X	1	X	
		MUTING ON CH 2		X	1	X	X	X	X	X	X	X
		SPLICE ON CH 2		1	X	X	X	X	X	X	X	X
		INTERPOLATION 2ND GRADE CH 2		X	X	X	1	X	X	X	X	X
		INTERPOLATION 1ST GRADE CH 2		X	X	1	X	X	X	X	X	X

NOTE: /SPLICE/ IS NOT SHOWN ON THE SIGNAL QUALITY DISPLAY. TO BE DISPLAYED ON THE TERMINAL ONLY.

DIEMPH			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
5 (58H)	DIEMPH	AUDIO CHANNEL STATUS BYTE 00		0	1	2	3	4	5	6	7

BYTE 00 :
 BIT 00 : 0 = CONSUMER / 1 = PROFESSIONAL USE
 BIT 01 : 0 = NORMAL / 1 = NON-AUDIO
 BITS 234 : EMPH., DEFINED IN PAR. 3.3, EMPH. HANDLING
 BIT 05 : 0 = SOURCE FS LOCKED / 1 = SOURCE FS UNLOCKED
 BITS 67 : FS, DEFINED IN PAR. 3.4, FS HANDLING

NOTE: BIT 0: IF SET LO (CONSUMER): NEGLECT FURTHER INFO.
 BIT 1: NOT CONSIDERED IN D820X.
 BIT 5: IF SET HI: SEND /MAINMUTE/ TO PROTECT ANALOG OUTPUTS AND DISPLAY ERROR MESSAGE TYPE A, LED "ERROR" FLASHING, LED "EXT. SYNC" DARK, MESSAGE "DI UNLOCK".

ADCLIPP			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
6 (5AH)	ADCLIPP1	CLIPPING INFO ANALOG INPT CH 1 ON		X	X	X	X	X	X	X	1
	ADCLIPP2	CLIPPING INFO ANALOG INPT CH 2 ON		X	X	X	X	X	X	1	X

RX:

BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB								
				7	6	5	4	3	2	1	0	
1 (51H)	DDEMPH	AUDIO CHANNEL STATUS BYTE 00		0	1	2	3	4	5	6	7	

BYTE 00 :
 BIT 00 : SET HI (PROFESSIONAL USE)
 BIT 01 : SET LO (NORMAL AUDIO MODE)
 BITS 234 : SET AS DEFINED IN PAR. 3.3, EMPH. HANDLING
 BIT 05 : SET ACCORDING TO /TTLOCK/ OR VARISPEED, LO = SOURCE SAMPLING FREQUENCY LOCKED
 BITS 67 : SET AS DEFINED IN PAR. 3.4, FS HANDLING

NOTE: V = AUDIO SAMPLE VALIDITY SET LO IN TRANSMITTER (VALID)
 U = USER DATA BIT SET LO IN TRANSMITTER (DEFAULT)

PREVIEW,ADCAES,ELOOP5,HPFILOFF,REPMUTE1,REPMUTE2,MAINMUTE,DAPROSYN

BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB								
				7	6	5	4	3	2	1	0	
2 (53H)	PREVIEW	NORMAL OUTPUT DELAYED		1	X	X	X	X	X	X	X	X
	ADCAES	DIGITAL INPUT (AS DEF IN T+T, 85H)		X	1	X	X	X	X	X	X	X
	ELOOP5	EE LOOP 5 OFF		X	X	1	X	X	X	X	X	X
	HPFILOFF	HIGHPASS FILTER OFF		X	X	X	1	X	X	X	X	X
	REPMUTE2	REPRO OUTPUT MUTED, CH 2		X	X	X	X	1	X	X	X	X
	REPMUTE1	REPRO OUTPUT MUTED, CH 1		X	X	X	X	X	1	X	X	X
	MAINMUTE	ALL OUTPUTS ON		X	X	X	X	X	X	1	X	X
	DAPROSYN	SYNC MODE FOR DAPRO IF + PROC ON		X	X	X	X	X	X	X	X	0

NOTE: DAPROSYN EXECUTES ON RISING EDGE.

NOTE: FOR A DEFINITION OF /ADCAES/ SEE NOTE AFTER BYTE 3 (85H) IN PAR. 3.3.

DISREPRO, EMPHASIS, PUNCH, TSHI/LO, INSERT

BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB								
				7	6	5	4	3	2	1	0	
3 (55H)	DISREP1	DISPLAY TO REPRO CH 1, ELSE INPUT		X	X	X	1	X	X	X	X	X
	DISREP2	DISPLAY TO REPRO CH 2, ELSE INPUT		X	X	1	X	X	X	X	X	X
	EMPHASIS	EMPHASIS FOR A1, AO ON, ELSE OFF		X	X	X	X	X	1	X	X	X
	PUNCH	FADER CH1 TO INPUT		X	X	X	X	X	X	1	X	X
	PUNCH	FADER CH2 TO INPUT		X	X	X	X	X	X	X	1	X
	TSHI/LO	TAPE SPEED HI (48, 44.1, 44.1/1.001)		X	1	X	X	X	X	X	X	X
	INSERT	MASTERING MODE ON, ELSE OFF		0	X	X	X	X	X	X	X	X

NOTE: /PUNCH/ NOT USED ANYMORE IN D820X.

COMMAND /INSERT/: MENU STRUCTURE IN "KEY MODE SETTINGS AUDIO / KEYS/MODE":

064	IGNORE DI C WORD	Y/N
065	MASTERING ON	Y/N
070	TEST	ON/OFF

SEND COMMAND /INSERT/, DO NOT INDICATE "EXTERNAL SYNC MODE"

DPGNADR

BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB								
				7	6	5	4	3	2	1	0	
5 (57H)	DPGNADR	DAPRO GAIN ADDRESS (BIT4=MSB) SEE LIST		X	X	X	M	B	B	B	B	L

DPDIGGN

BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB								
				7	6	5	4	3	2	1	0	
6 (59H)	DPDIGGN	DAPRO GAIN DATA (BIT7=MSB)		M	B	B	B	B	B	B	B	L

ANALOG INPUT 1.861.752.00
 ANALOG OUTPUT 1.861.751.00

MAINMUTE, EMPHASIS			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
2 (53H)	MAINMUTE	ALL OUTPUTS ON		X	X	X	X	X	X	1	X
3 (55H)	EMPHASIS	EMPHASIS ON		X	X	X	X	X	1	X	X

PUNCH-XFADE TIME DATA (HEX)	ACTUAL TIME @44.1 msec.	ACTUAL TIME @48kHz msec.
0	ca. 0	ca. 0
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
9	9	9
A	10	10
B	11	11
C	12	12
D	13	13
E	14	14
F	15	15
10	16	16
11	17	17
12	18	18
13	19	19
14	20	20
15	21	21
16	22	22
17	23	23
18	24	24
19	25	25
1A	26	26
1B	27	27
1C	28	28
1D	29	29
1E	30	30
1F	31	31
20	32	32
21	33	33
22	34	34
23	35	36
24	37	38
25	39	40
26	41	43
27	44	46
28	47	49
29	50	53
2A	53	57
2B	57	62
2C	62	68
2D	68	76
2E	74	85
2F	83	98
30	93	114
31	106	137
32	124	171
33	149	228
34	186	341
35	248	683
36	372	inf.
37	743	n.u.
38	inf.	n.u.
39	n.u.	n.u.
3A	n.u.	n.u.
3B	n.u.	n.u.
3C	n.u.	n.u.
3D	n.u.	n.u.
3E	n.u.	n.u.
3F	n.u.	n.u.

GAIN ADDRESS (HEX)	SELECTED LOCATION
0	INPUT CH 1
1	SYNC CH 2
2	REPRO CH 2
3	DO NOT CHANGE
4	DO NOT CHANGE
5	DO NOT CHANGE
6	DO NOT CHANGE
7	DO NOT CHANGE
8	DO NOT CHANGE
9	DO NOT CHANGE
A	DO NOT CHANGE
B	DO NOT CHANGE
C	DO NOT CHANGE
D	DO NOT CHANGE
E	DO NOT CHANGE
F	DO NOT CHANGE
10	INPUT CH 2
11	SYNC CH 1
12	REPRO CH 1
13	DO NOT CHANGE
14	DO NOT CHANGE
15	DO NOT CHANGE
16	DO NOT CHANGE
17	DO NOT CHANGE
18	DO NOT CHANGE
19	DO NOT CHANGE
1A	DO NOT CHANGE
1B	DO NOT CHANGE
1C	DO NOT CHANGE
1D	DO NOT CHANGE
1E	DO NOT CHANGE
1F	DO NOT CHANGE

3.3.2 CODEC CONTROL 1.861.857.00

COBUS: RX, TX (2BRECTRMEX)

ADDRESSES: TX=70H, RX=71H

THIS BOARD SUPPLIES - CODEC MEMORY 1.861.858.00

RX:

HEX	7	6	5	4	3	2	1	0	
88	1	X	X	X	1	X	X	X	SYSCON REQUIRES SQ-DISP. DATA (\$)
F7	1	1	1	1	0	1	1	1	SYSCON REQUIRES CRC FROM TRK8 (\$\$)
F6	1	1	1	1	0	1	1	0	SYSCON REQUIRES CRC FROM TRK7 (\$\$)
F5	1	1	1	1	0	1	0	1	SYSCON REQUIRES CRC FROM TRK6 (\$\$)
F4	1	1	1	1	0	1	0	0	SYSCON REQUIRES CRC FROM TRK5 (\$\$)
F3	1	1	1	1	0	0	1	1	SYSCON REQUIRES CRC FROM TRK4 (\$\$)
F2	1	1	1	1	0	0	1	0	SYSCON REQUIRES CRC FROM TRK3 (\$\$)
F1	1	1	1	1	0	0	0	1	SYSCON REQUIRES CRC FROM TRK2 (\$\$)
F0	1	1	1	1	0	0	0	0	SYSCON REQUIRES CRC FROM TRK1 (\$\$)
BX	1	X	1	1	X	X	X	X	REPRO CH2 + CH1
AX	1	X	1	0	X	X	X	X	REPRO CH2, INPUT CH1
9X	1	X	0	1	X	X	X	X	REPRO CH1, INPUT CH2
8X	1	X	0	0	X	X	X	X	INPUT CH2 + CH1
7X	0	1	1	1	X	X	X	X	EELOOP 3, NO ERROR
6X	0	1	1	0	X	X	X	X	---
5X	0	1	0	1	X	X	X	X	EELOOP 3, WRITE ERRORS
5E	0	1	0	1	1	1	1	0	WRITE ERRORS (5E...50):
5D	0	1	0	1	1	1	0	1	LONG BURST, MOST TRKS,SPLICE,L
5C	0	1	0	1	1	1	0	0	LONG BURST, MOST TRKS,SPLICE,R
5A	0	1	0	1	1	0	1	0	LONG BURST, MOST TRKS,SPLICE,R,L
59	0	1	0	1	1	0	0	1	SHORT BURST,MOST TRKS,SPLICE,L
58	0	1	0	1	1	0	0	0	SHORT BURST,MOST TRKS,SPLICE,R
56	0	1	0	1	0	1	1	0	SHORT BURST,MOST TRKS,SPLICE,R,L
55	0	1	0	1	0	1	0	1	LONG BURST,SINGLE TRK,TL WRI,L
54	0	1	0	1	0	1	0	0	LONG BURST,SINGLE TRK,TL WRI,R
52	0	1	0	1	0	0	1	0	LONG BURST,SINGLE TRK,TL WRI,R,L
51	0	1	0	1	0	0	0	1	SHORT BURST,SINGLE TRK,P1 COR,L
50	0	1	0	1	0	0	0	0	SHORT BURST,SINGLE TRK,P1 COR,R
4X	0	1	0	0	X	X	X	X	SHORT BURST,SINGLE TRK,P1 COR,R,L
4F	0	1	0	0	1	1	1	1	EELOOP 3, READ ERRORS
4E	0	1	0	0	1	1	1	1	READ ERRORS (4F...40):
4D	0	1	0	0	1	1	0	1	BURST 4, R, L, ALL TRACKS
4C	0	1	0	0	1	1	0	0	BURST 3, R, L, ALL TRACKS
4B	0	1	0	0	1	0	1	1	BURST 4, R, L, UPPER HALF OF TRKS
4A	0	1	0	0	1	0	1	0	BURST 3, R, L, UPPER HALF OF TRKS
49	0	1	0	0	1	0	0	1	---
48	0	1	0	0	1	0	0	0	TRACKLOSS 3, L
47	0	1	0	0	1	0	0	0	TRACKLOSS 2, L
46	0	1	0	0	1	0	0	0	TRACKLOSS 1, L
45	0	1	0	0	0	1	1	1	BURST 2, R, L, ALL TRACKS
44	0	1	0	0	0	1	1	0	BURST 1, R, L, ALL TRACKS
43	0	1	0	0	0	1	0	1	BURST 2, R, L, UPPER HALF OF TRKS
42	0	1	0	0	0	0	1	0	BURST 1, R, L, UPPER HALF OF TRKS
41	0	1	0	0	0	0	0	1	---
40	0	1	0	0	0	0	0	0	TRACKLOSS 3, R
									TRACKLOSS 2, R
									TRACKLOSS 1, R

WRITE ERRORS :		READ ERRORS :	
50	R L)	OVERWRITE DROPOUT :	40 R trackloss 1
51	R)	single track, short	41 R trackloss 2
52	L)	burst, second pass	42 R trackloss 3
		q correction	43 R (muting)
54	R L)		44 R L burst 1, upper half of tracks
55	R)		45 R L burst 2, upper half of tracks
56	L)		46 R L burst 1, all tracks
			47 R L burst 2, all tracks
58	R L)	SINGLE SPLICE	48 L trackloss 1
59	R)	most tracks, short	49 L trackloss 2
5A	L)	burst	4A L trackloss 3
			4B L (muting)
5C	R L)	DOUBLE SPLICE WITH	4C R L burst 3, upper half of tracks
5D	R)	SHORTEST DISTANCE	4D R L
5E	L)	(221 BLOCKS), most	4E R L burst 3, all tracks
		tracks, long burst	4F R L

ABBREVIATIONS:

- R = RIGHT CHANNEL (CH 2)
- L = LEFT CHANNEL (CH 1)
- TL = TRACKLOSS
- P1 = FIRST PASS P CORRECTION
- COR = CORRECTION
- TRK (S) = TRACK(S)

NOTES: (\$) TERMINAL (COUNTER) DISPLAY DISABLED. SQ-DISPLAY ONLY.
 (\$ \$) TERMINAL (COUNTER) DISPLAY ONLY. SQ-DISPLAY DISABLED.

DESCRIPTION OF:

TRACKLOSS 1: 1 TRACK MISSING
 TRACKLOSS 2: 2 TRACKS MISSING, CAUSES INT2 (NOTE \$)
 TRACKLOSS 3: 3 TRACKS MISSING, CAUSES INT1 (NOTE \$\$)

BURST 1, UPPER HALF OF TACKS: 85 BLOCKS
 BURST 2, UPPER HALF OF TACKS: 204 BLOCKS
 BURST 3, UPPER HALF OF TACKS: 272 BLOCKS

BURST 1, ALL TRACKS: 85 BLOCKS (FINGERPRINT)
 BURST 2, ALL TRACKS: 204 BLOCKS (MAX. FINGERPRINT)
 BURST 3, ALL TRACKS: 272 BLOCKS (MUTE)

SHORT BURST: 4 BLOCKS
 LONG BURST : 221 BLOCKS

NOTE \$: DUE TO THE TWIN MATRICING 1 SAMPLE OUT OF 4 IS MISSING
NOTE \$\$: DUE TO THE TWIN MATRICING 2 SAMPLES OUT OF 4 ARE MISSING

TX (RX BIT 7 AND BIT 3 SET HIGH)

SYSCON REQUIRES SQ-DISPLAY DATA		DESCRIPTION	BITS	7	6	5	4	3	2	1	0
BYTE NO	SIG NAME										
1 (70H)	QP1LEFT	QP1 CORRECTION, CH1		X	X	X	X	X	X	X	0
	QP2LEFT	QP2 CORRECTION, CH1, SQ-DISPLAY		X	X	X	X	X	X	0	X
	FPLEFT	FINGERPRINT, CH1, SQ-DISPLAY		X	X	X	X	X	0	X	X
	TLLEFT	TRACKLOSS, CH1, SQ-DISPLAY		X	X	X	X	1	X	X	X
	QP1RIGHT	QP1 CORRECTION, CH2		X	X	X	0	X	X	X	X
	QP2RIGHT	QP2 CORRECTION, CH2, SQ-DISPLAY		X	X	0	X	X	X	X	X
	FPRIGHT	FINGERPRINT, CH2, SQ-DISPLAY		X	0	X	X	X	X	X	X
	TLRIGHT	TRACKLOSS, CH2, SQ-DISPLAY		1	X	X	X	X	X	X	X

TX (RX BIT 7 SET HIGH, BIT 3 SET LOW)

SYSCON REQUIRES CRC ERRORS (SPECIFY TRK)

BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
1 (70H)	CCRCERR	CRC ERRORS FROM 8BIT COUNTER TRK NO TO BE SPECIFIED WITH RX BITS 0...2	M	B	B	B	B	B	B	L

COMPOSITION OF SQ-DATA

ORIGIN	ADDR	NAME	DESCRIPTION
SYSCON	01	LOW ERROR RATE	NORMAL BEHAVIOUR
CODEC	02	QP2 CORRECTION	SECND PASS QP-PARITY CORRECTION
CODEC	04	FINGERPRINT	>=4 TRKS, T<<
CODEC	08	TRACKLOSS	>=1 TRK, T>=512 BLOCKS (1/4 SEC.)
DAPRO *	10	INTERPOLATION 2	INT 2ND GRADE (QUADRATIC)
DAPRO *	20	INTERPOLATION 1	INT 1ST GRADE (LINEAR)
DAPRO *	40	MUTE	WITH TIMEOUT 0.5 SEC.
SYSCON	80	NO DATA	AFTER TIMEOUT MUTE

NOTE *: SEE PAR. 3.1, GAINS CONTROL, BYTE 4 (56H)

	QUALDI SL								QUALDI SR							
ADDR . :	80	40	20	10	08	04	02	01	01	02	04	08	10	20	40	80
COLOR :	RD	RD	YL	YL	GN	GN	GN	GN	GN	GN	GN	GN	YL	YL	RD	RD
ABBR . :	ND	M	INT		TL	FP	QP2			QP2	FP	TL	INT		M	ND
			1	2					OK	OK			2	1		

HIGHER ORDER BITS ARE PRIORITY ENCODED BY SYSCON.

**3.3.3
TIMING AND TEST 1.861.862.00**

COBUS: RX, TX (8BTRMEX, 8BRECEX)

THIS BOARD SUPPLIES - TRANSFORMATTER 1.861.859.00

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	7	MCCONW1	CONTROL WORD 1 MASTER CLOCK
2	12	MCVASP	VARI SPEED COMMAND (2 BYTES)
3	6	MCCONW2	CONTROL WORD 2 MASTER CLOCK
4	1	EMPHASXF	TX TO SYSCON
5	1	PRESENT	TIMING AND TEST PRESENT
6	1	RTSYNC	SYSCON FORCES RT SYNC
7	1	TTERROR	TEST OF T+T PERFORMED, ERROR(S) DETECTED
8	1	TTLOCK	VCXO-PLL LOCKING CONDITION
9	1	RANGEOK	RECORDER OPERATES WITHIN VARISPDRANGE
10	1	VCXOHI	SELECTS VCXO
11	3	FSSET	SET OF CRYSTALS (2 MAX.)
12	1	RECORDXF	RECORD TO XFORMATTER (NOM. SPEED)
13	1	EELoop2	EE LOOP 2, FORMATTER-DASY
14	1	EMPHASIS	EMPHASIS WRITTEN IN BLOCKS

NOTE: TESTING PROCEDURE: CHECK OF TIMING PATTERNS. MAY BE CHECKED BY SYSCON AT ANY TIME.

NOTE:

COMMAND /3HEAD/ HARDWIRED TO 3HEAD-MODE ON TRANSFORMAT-
TER AND TIMING + TEST.

DEF. OF /TTLOCK: IF 80H, BIT2, SET TO HI

TEST: DI ON OR OFF
IF DI OFF:

- 1 SET 51H, BIT5 TO HI (DO)
- 2 INDICATE A) ERROR MSG "VCXO-PLL OUT OF LOCK" IN LCD AND
REMOTE(S)
- B ERROR LED FLASHING
- C FS LED'S NOT ILLUMINATED

IF DI ON:
DO 1 AND 2 ABOVE PLUS REPMUTE AND MAINMUTE

ELSE INDICATE LOCKING CONDITION, FUNCTIONAL.

TX ONLY: FROM TRANSFORMATTER:

BYTE NO	SIG NAME	DESCRIPTION	MSB										
			BITS	7	6	5	4	3	2	1	0		
1 (80H)	EMPHASXF	EMPHASIS ON (SEE NOTE S)		X	X	X	X	X	X	X	X	X	1

TX ONLY: FROM TIMING + TEST:

BYTE NO	SIG NAME	DESCRIPTION	MSB										
			BITS	7	6	5	4	3	2	1	0		
1 (80H)	TTERROR	TEST OF T+T PERFORMED, ERROR(S) DET.		X	X	X	X	X	X	X	X	1	X
	PRESENT	TIMING AND TEST PRESENT		X	X	X	X	0	X	X	X	X	X
	FSSET	SET OF CRYSTALS (2 MAX.)		M	B	L	X	X	X	X	X	X	X
	TTLOCK	VCXO-PLL OUT OF LOCK		X	X	X	X	X	X	1	X	X	X
	RANGEOK	OPERATING RANGE WITHIN 27...55 kHz		X	X	X	1	X	X	X	X	X	X

M	B	L	SET OF FS
0	0	0	48 / 44.1
0	0	1	48 / 44.056
0	1	0	48 / 32
0	1	1	44.1 / 44.056
1	0	0	44.1 / 32
1	0	1	32 / 44.056

NOTE: FS CONFIGURATION IS SELECTED ON VCXO BOARD.

RX:

MCVASP1

BYTE NO	SIG NAME	DESCRIPTION	MSB										
			BITS	7	6	5	4	3	2	1	0		
1 (81H)	MCVASP1	VARISPEED LOWER BYTE MIN (= -12.5%)		1	0	0	0	0	0	0	0	0	0
		MID (=NO DEVIATION)		0	0	0	0	0	0	0	0	0	0
		LOWER BYTE MAX (+12.5%)		1	0	0	0	0	0	0	0	0	0

MCVASP2

BYTE NO	SIG NAME	DESCRIPTION	MSB										
			BITS	7	6	5	4	3	2	1	0		
2 (83H)	MCVASP2	VARISPEED UPPER BYTE MIN (= -12.5%)		0	0	0	0	0	0	1	0	1	1
		MID (NO DEVIATION)		0	0	0	0	0	0	1	0	0	0
		UPPER BYTE MAX (+12.5%)		0	0	0	0	0	0	0	0	1	0

INCREMENT: 3LSB STEPS INDICATE 0.1% DEVIATION.

MCCONW1

BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB							
				7	6	5	4	3	2	1	0
3 (85H)	MCCONW1	TR-REFEX, UNBALACED, NO VARISPEED		0	0	0	0	0	1	0	1
		VIDEO CLOCK, 25 Hz, BALANCED, VARI		0	0	1	0	0	0	1	0
		VIDEO CLOCK, 25 Hz, UNBALANCED, VARI		0	0	1	0	0	0	1	1
		VIDEO CLOCK, 29.97Hz, BALANCED, VARI		0	0	1	0	0	1	1	0
		VIDEO CLOCK, 29.97Hz, UNBAL., VARISP		0	0	1	0	0	1	1	1
		INTERNAL REFERENCE, VARISPEED		0	0	1	0	1	0	0	0
		VIDEO CLOCK, 25Hz, BALANCED, NO VARI		0	0	1	1	0	0	1	0
		VIDEO CLOCK, 25Hz, UNBAL., NO VARI		0	0	1	1	0	0	1	1
		VIDEO CLOCK, 29.97Hz, BAL., NO VARI		0	0	1	1	0	1	1	0
		VIDEO CLOCK, 29.97Hz, UNBAL.,NO VARI		0	0	1	1	0	1	1	1
		AESIN, BALANCED, NO VARISPEED		0	0	1	1	0	1	0	0
		INTERNAL REFERENCE, NO VARISPEED		0	0	1	1	1	0	0	0
		WORD SYNC, BALANCED, VARISPEED		0	1	1	0	0	0	0	0
		WORD SYNC, UNBALANCED, VARISPEED		0	1	1	0	0	0	0	1
		VIDEO CLOCK, 30Hz, BALANCED, VARI		0	1	1	0	0	0	1	0
		VIDEO CLOCK, 30Hz, UNBAL., VARISPEED		0	1	1	0	0	0	1	1
		WORD SYNC, BALANCED, NO VARISPEED		0	1	1	1	0	0	0	0
		WORD SYNC, UNBALANCED, NO VARI		0	1	1	1	0	0	0	1
		VIDEO CLOCK, 30Hz, BALANCED, NO VARI		0	1	1	1	0	0	1	0
		VIDEO CLOCK, 30Hz, UNBAL., NO VARI		0	1	1	1	0	0	1	1
POWER SUPPLY SYNC ON			1	X	X	X	X	X	X	X	

NOTE: IF DIGITAL INPUT IS SELECTED, SYSCON SETS MCCONW1 TO 34H (AESIN, BALANCED, NO VARISPEED).

MCCONW2 BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB							
				7	6	5	4	3	2	1	0
4 (87H)	MCCONW2	SAMPLING FREQUENCY 48kHz		X	X	X	X	X	X	0	1
		SAMPLING FREQUENCY 44.1kHz		X	X	X	X	X	X	1	0
		SAMPLING FREQUENCY 44.056kHz		X	X	X	X	X	X	1	1
		SAMPLING FREQUENCY 32kHz		X	X	X	X	X	X	0	0
		OUTPUT CLOCK = WORD CLOCK		X	X	X	X	1	X	X	X
		RECORDXF RECORD TO XFORMATTER (NOM. SPEED)		X	1	X	X	X	X	X	X
		ELOOP2 EE LOOP 2 ON, XFORMATTER-DASY		X	X	0	X	X	X	X	X
		EMPHASIS EMPHASIS ON TO XFORMATTER		X	X	X	1	X	X	X	X
		VCXOHI VCXO WITH HIGHER FREQUENCY = ON		1	X	X	X	X	X	X	X

TRANSFORMATTER 1.861.859.00

ELOOP2 BYTE NO	RECORD, SIG NAME	EMPHASIS, RTSYNC DESCRIPTION	BITS	MSB							
				7	6	5	4	3	2	1	0
4 (87H)	RECORDXF	RECORD TO XFORMATTER (NOM. SPEED)		X	1	X	X	X	X	X	X
	ELOOP2	EE LOOP 2, FORMATTER-DASY		X	X	0	X	X	X	X	X
	EMPHASIS	EMPHASIS ON (SEE NOTE \$)		X	X	X	1	X	X	X	X
	RTSYNC	SYNC FROM RT ON		X	X	X	X	X	1	X	X

DEF OF /RTSYNC/: THE SIGNAL HAS FOUR IMPLIFICATIONS:

- A IT PROTECTS THE RT TRACK FROM OVERRITING (SOFTWARE FUNCTION)
- B SERVO CONTROL IS DERIVED STRICTLY FROM THE REFERENCE TIME TRACK
- C THE DATA SYNCHRONIZER (TBC) IS MAINLY CONTROLLED BY RT, AND NOT BY A MAXIMUM LIKELYHOOD DETECTION OF THE SYNC WORDS OF ALL (8) DATA TRACKS
- D SPLICE DETECTION IS NOT CARRIED OUT BY INVESTIGATING THE OCCURENCE OF BLOCK SYNCs WITHIN A CERTAIN TIME WINDOW AND NOT BY DETECTING POSSIBLE DISCONTINUITIES OF BLOCK ADDRESSES.

CONSEQUENCES:

- A NEW RECORD: RT IS WRITTEN, DATA SYNC. THE USER IS ADVISED TO RECORD BOTH CHANNELS, EVEN IF ONLY ONE CHANNEL CONTAINS VALID INFORMATION.

- B PLAY: WHEN THE TAPE CONTAINS A STEREO RECORDING, DATA SYNC IS PREFERRED (BETTER RELIABILITY). IN THE CASE OF A TWO CHANNEL RECORDING, THE SYNCs FROM BOTH CHANNELS MAY BE DISPLACED BY UP TO 1 BLOCK (EACH +/-1/2 BLOCK REFERENCED TO RT). THEN RTSYNc HAS TO BE SELECTED.
- C STEREO RECORD: RTSYNc IS NOT SELECTED. THE TBC IS CONTROLLED BY DATA FOR IMPROVED RELIABILITY AND RT IS ALWAYS OVERWRITTEN.
- D SINGLE CHANNEL RECORD: RTSYNc IS SELECTED. THE TBC IS CONTROLLED BY RT AND THE RT TRACK IS PRESERVED. THE NEW TRACK IS ALIGNED TO RT ACCORDING TO FORMAT SPECS. IN THE CASE OF A NON-CONTINUOUS RT (I.E. AFTER A SPLICE) A REACTION TIME OF 157 BLOCKS, CONSISTING OF 152 BLOCKS HEAD DISTANCE, 4 BLOCKS DASY-DELAY AND 1 BLOCK FORMATTERDELAY, HAS TO BE TAKEN INTO ACCOUNT, BEFORE BLOCK NUMBERS AGAIN CORRESPOND TO SECTORS.
- E ELECTRONIC EDITORS SHOULD USE RT SYNC MODE BECAUSE PUNCH-IN/-OUT AND APPEND OPERATIONS MAY LEAD TO BLOCK SYNC LOCATIONS OUTSIDE THE EXPECTED WINDOW OF THE D820X. THE D820X DETECTS SPLICE WITHOUT RT SYNC MODE AND PERFORMS CROSSFILTERING ALTHOUGH SAMPLE ACCURATE PUNCHES HAVE BEEN PERFORMED.

SEE ALSO TABLE AT THE END OF CHAPTER 3.4.

RECORDXF HANDLING: /RECORDXF/ TOGETHER WITH /RTSYNc/ DEFINE SERVO CONTROL. /RECORDXF/ DIFFERENTIATES BETWEEN CONTROL FROM X-TAL OR FROM TAPE (RT OR DATA). /RTSYNc/ SEPARATES BETWEEN SYNC FROM RT OR FROM DATA.

VARISPEED HANDLING: VARISPEED IS IN ALL MODES ENABLED, EXCEPT WHEN SET TO SYNCHRONIZER INPUT (T-REFEXT) OR WHEN SET TO DIGITAL INPUT. THE DO-BYTE 00, BIT 05, IS SET TO HI, WHEN VARISPEED = ON OR WHEN /TTLOCK/ = HI (UNLOCK) AND THE APPROPRIATE SAMPLING FREQUENCY LED IS SWITCHED OFF.

APPEND MODE HANDLING: (FROM SERIAL PORT ONLY)

/APE/ + PLAY : RT OR DATA SYNC POSSIBLE (USER)

/APE/ + REC : INITIALIZE /RTSYNc/ AND SET SET /RECORDXF/ TO HI

/APD/ : ESTABLISH PREVIOUS RT SYNC MODE.

NOTE \$: EMPHASIS HANDLING:

A W/O DI : PLAY:

INDEPENDENT OF PREVIOUS STATUS, /EMPHASIS/ IS SET ACCORDING TO EMPHASIS FLAG ON TAPE (EMPH BIT IN BLOCKS, DETECTED BY TRANSFORMATTER). OVERRIDING BY TOGGLE SWITCH POSSIBLE. IF EMPHASIS IS NOT SET ACCORDING TO FLAG ON TAPE: EMPHASIS KEY (IF ASSIGNED) AND EMPH BULB (ON SECOND. KEYBD.) ON AND ERROR INDIC. FLASHING AS LONG AS ERRONEOUS STATUS IS VALID. ERROR MESSAGE: TAPE EMPH MISMATCH. SYSCON SENDS STATUS TO

- GAINS CONTROL FOR DO, AI AND AO

- T+T FOR XFORMATTER

- PDM CONTROL FOR PDM MODULATOR

AS SET BY EMPHASIS KEY. DO-BYTE (51H) IS EITHER 100 FOR NO EMPH., RECEIVER MANUAL OVERRIDE DISABLED, OR 110 FOR 50/15 USEC. EMPHASIS, RECEIVER MANUAL OVERRIDE DISABLED. PATTERNS 000 AND 111 ARE USED IN TRANSPARENT MODE FROM DI ONLY (STOP OR INPUT, SEE BELOW).

RESET OF OVERRIDE FUNCTION:
AUTOMATIC MODE RESTORED WHEN SETTING IDENTICAL TO FLAG FROM TRANSFORMATTER.

STOP:

EMPHASIS MAY BE CHANGED ANY TIME. SYSCON SENDS STATUS TO

- GAINS CONTROL FOR DO, AI AND AO
- T+T FOR XFORMATTER
- PDM CONTROL FOR PDM MODULATOR AS SET BY EMPHASIS KEY.

RECORD:

IF EMPHASIS STATUS ON:
TRANSFORMATTER WRITES EMPHASIS BIT IN BLOCKS. OVERRIDING BY TOGGLE SWITCH NOT POSSIBLE.

IF EMPHASIS KEY SET TO OFF:
NO EMPHASIS FLAG IS RECORDED ON TAPE. OVERRIDING BY TOGGLE SWITCH NOT POSSIBLE.

B WITH DI : NOT PLAY MODE: BIT PATTERN = 110 INDEPENDENT ON PREVIOUS STATUS, /EMPHASIS/ IS SET ACCORDING TO PATTERN DETECTED BY DI, DAPRO IF, SIGNAL /DIEMPH/. OVERRIDING NOT POSSIBLE!

NOTE: VALID ONLY IF D820X SET TO DIGITAL INPUT. SYSCON SENDS STATUS TO

- GAINS CONTROL FOR DO, AI AND AO
- T+T FOR XFORMATTER
- PDM CONTROL FOR PDM MODULATOR

NOT PLAY MODE: BIT PATTERN = 100 INDEPENDENT ON PREVIOUS STATUS, /EMPHASIS/
IS SWITCHED OFF. OVERRIDING NOT POSSIBLE!

NOTE: VALID ONLY IF D820X SET TO DIGITAL INPUT. SYSCON SENDS STATUS TO

- GAINS CONTROL FOR DO, AI AND AO
- T+T FOR XFORMATTER
- PDM CONTROL FOR PDM MODULATOR

NOT PLAY MODE: BIT PATTERN = 000

DEFAULT IS NO EMPHASIS, WITH OVERRIDE BY TOGGLE KEY ENABLED. TRANSMITTING AS ABOVE. NOT PLAY MODE: BIT PATTERN = 111

A SIGNAL /DDEMPH/, GAINS CONTROL (51H):
(TRANSPARENT MODE) PATTERN 111 TRANSMITTED.

B SIGNAL /EMPHASIS/: SYSCON ACTS SIMILAR
AS WITH PATTERN 000. DEFAULT = NO EMPHASIS, KEY ENABLED. ERROR MESSAGE AND FORMAT MISMATCH MESSAGE.

PLAY MODE: REACTS TO INFO CONTAINED IN DATA BLOCKS, INDEPENDENT ON OVERRIDE SPECS FROM DI.

IMPORTANT: THIS IS AN EXCEPTION TO THE PRIORITY LEVELS DESCRIBED UNDER "FS HANDLING", PAR. BC. THE HIERARCHICAL STRUCTURE THERE IS: 1. DI, 2. RT, 3. KEYBD. THIS HAS TO BE CHANGED HERE TO 1. DATA FROM TAPE (EMPHASIS FLAG IN BLOCKS), 2. DI (IN ACCORDANCE WITH SPECIAL CONDITIONS PART E "CONSUMER" BELOW), 3. KEYBD (AND REMOTES). OVERRIDE WITH TOGGLE KEY POSSIBLE. ERROR LED FLASHING AND MESSAGE "TAPE EMPH MISMATCH" AS LONG AS FLAG FROM TAPE DOES NOT CORRESPOND TO KEY SETTING.

RECORD:

SYSCON ACTS ACCORDING TO DI-FLAG, OR TO A SELECTED CONFIGURATION AS DESCRIBED ABOVE. IT MAY THEN RECEIVE

"EMPHASIS ON" STATUS FROM T+T (XFORMATTER) AGAIN, WHICH IT NEGLECTS. OVERRIDING BY TOGGLE SWITCH NOT POSSIBLE. FOR PATTERN 111 ONLY (CCITT J17): ERROR MESSAGE AND FORMAT MISMATCH!

SPECIAL CONDITIONS:

C SINGLE TRACK RECORDING: EMPHASIS AFFECTS BOTH CHANNELS SIMULTANEOUSLY (STEREO-MODE), BECAUSE THE AES/EBU FORMAT DOES NOT ALLOW FOR INDIVIDUAL TRANSMISSION, AND TO KEEP HARDWARE, SOFTWARE AND OPERATION AS SIMPLE AS POSSIBLE.

WHEN A SINGLE CHANNEL RECORDING HAS BEEN MADE, THE TRANSFORMATTER READS THE EMPHASIS FLAG CORRECTLY IN READ AFTER WRITE PROVIDED, THAT THE HEAD DISTANCE HAS BEEN ADJUSTED CORRECTLY. WHEN AN ATTEMPT IS MADE TO WRITE THE REMAINING CHANNEL WITH A DIFFERENT EMPHASIS SETTING TO THE ONE WHICH IS FOUND ON THE READ-BACK CHANNEL, THE SYSCON SETS THE EMPHASIS ACCORDING TO THE PREVIOUSLY RECORDED CHANNEL AND DISPLAYS AN ERROR MESSAGE IN THE LCD: "OVERRIDE DISABLED" IF ANY ATTEMPT IS MADE TO OVERRIDE IT MANUALLY, OR IT DISPLAYS AN ERROR MESSAGE "DI EMPH MISMATCH" AS LONG AS THE DI EMPHASIS MODE DOES NOT MATCH.

D CCITT J17 CONSTANTS: PATTERN 111 (CCITT J17): SINCE THE RECORDER IS NOT EQUIPPED WITH THE REQUIRED TIME CONSTANTS, IT WILL OUTPUT AN ERROR MESSAGE, WHEN FORCED TO RECORD. IN STOP OR INPUT MODE THE DI-BYTE WILL BE EQUAL TO THE DO-BYTE.

E CONSUMER MODE: STOP, INPUT OR RECORD MODE:
IF BIT 1 IN BYTE 00 OF THE CONTROL WORD IS SET LOGICAL LOW, THEN CONSUMER MODE IS SPECIFIED. IN THIS MODE ONLY THE EMPHASIS FLAG IS PROCESSED. OVERRIDE DISABLE IS SPECIFIED BECAUSE THERE IS NO MANUAL OVERRIDE MODE AND TO ELIMINATE OPERATIONAL ERRORS. INPUTS FROM THE KEYBOARD OR FROM EMPHASIS FLAG IN DATA BLOCKS ARE CONSIDERED INVALID. ERROR MESSAGE "ILLEGAL DI FORMAT" (BECAUSE THE FORMAT IS ONLY PARTIALLY PROCESSED) AND ERROR LED.

PLAY:

EXCEPTION AS WITH PROFESSIONAL DI FORMAT:
EMPHASIS FLAG IN DATA BLOCKS IS PRIORITY ONE. OVERRIDE WITH TOGGLE KEY POSSIBLE. ERROR LED FLASHING AND MESSAGE "TAPE EMPH MISMATCH" AS LONG AS FLAG FROM TAPE DOES NOT CORRESPOND TO KEY SETTING. NOTE: OTHER ERROR MESSAGES MAY OVERRIDE "TAPE EMPH MISMATCH". EXAMPLE: EXTERNAL FS=44.1 kHz; TAPE=48 kHz; USER SELECTS 48 kHz TO PLAY TAPE. ERROR MESSAGE "CHECK EXTERNAL SYNC" (WITH HIGHER PRIORITY) APPEARS, BECAUSE THE LOCAL X-TAL CONFIGURATION IS NOT SUITED TO REMOTE SYNC SOURCE.

NOTE ON FS HANDLING SEE PAR. 3.4 BELOW.

3.3.4 RT/TC CODEC 1.861.861/761

COBUS: 2 INDIVIDUAL RECEIVERS, TRANSMITTERS

THIS BOARD SUPPLIES - ADAPTIVE RUN PROCESSOR

1.861.860/760

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	48	RTADDR	VALUE OF RT (BIN) TO SYSCON
2	1	TXRTCRC	RT ADDRESS INVALID (CRC ERROR)
3	32	RTATOCO	RT ADDR TO RT/TC CODEC
4	1	FLAG	INDICATES TWIN RECORDING (FROM SYSCON)
5	3	SAMPFREQ	48, 44.1, 32 kHz, OR UNSPECIFIED (FROM SYSCON)
6	3	FORMAT	DASH FORMAT VERSION (FROM SYSCON)
7	3	AUXTRKFO	AUXILIARY TRACK FORMAT (FROM SYSCON)
8	6	RESERVED	UNSPECIFIED BITS (FROM SYSCON)
9	64	TCADDR	VALUE OF TIME CODE (BCD), READ 8 TIMES
10	1	TCREADY	SYSCON READY TO RECEIVE TC ADDRESS
11	1	PRESENT	RT/TC CODEC PRESENT
12	1	TXTCMOD	SELECTS TC RECORDING MODE (UNMODULATED/MODULATED)
13	1	ARPOFF	ADAPTIVE OR TRANSPARENT MODE FOR RUN PROCESSOR
14	1	TCDELAY	TC OUTPUT DELAY
15	1	FREEZED	FREEZE CONTENT OF DRAM IN ADAPTIVE RUN PROCESSOR
16	1	FRAMERA	TC FRAME RATE TO TC CODEC
17	1	TCREAD	TC STATUS = READ FROM TAPE
18	1	EETC	EE-LOOP TC (AFTER WRITE-DELAY TO CLK RECOVERY)
19	1	TCUP	INDICATES TAPE DIRECTION
20	1	TCMOD	SELECTS DEMODULATION MODE (UNMODULATED/MODULATED)
21	1	FSTC	SPECIFIES FS FOR TC OUTPUT DELAY TIME

A) RT CODEC

TX ONLY:

RTADDR0...5, TXRTCRC			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
1 (9EH)	TXRTCRC	CRC ERROR, ALL FOLLOW. BYTES INVALID	1	X	X	X	X	X	X	X	X
2 (90H)	RTADDR0	VALUE OF REFERENCE TIME (BIN)RTCONW1	M	6	5	4	3	2	1	0	
3 (92H)	RTADDR1	VALUE OF REFERENCE TIME (BIN)RTCONW2	7	6	5	4	3	2	1	L	
4 (94H)	RTADDR2	VALUE OF REFERENCE TIME (BIN)ADDR1	M	6	5	4	3	2	1	0	
5 (96H)	RTADDR3	VALUE OF REFERENCE TIME (BIN)ADDR2	7	6	5	4	3	2	1	0	
6 (98H)	RTADDR4	VALUE OF REFERENCE TIME (BIN)ADDR3	7	6	5	4	3	2	1	0	
7 (9AH)	RTADDR5	VALUE OF REFERENCE TIME (BIN)ADDR4	7	6	5	L	X	X	X	X	

NOTE: SYSCON RECEIVES ALL BYTES SEQUENTIALLY AS DESCRIBED ABOVE. IT MAY STOP THE REQUEST CYCLE AFTER EVERY BYTE. TIME LIMIT TO READ ALL 7 BYTES: <4 msec.

FORMAT OF CONTROL WORD (CNTL W): SEE BYTES 1,2 BELOW


RX:

SAMPFREQ, FORMAT, FLAG, AUX TRK FORMAT, RESERVED, RTATOCO1..3	BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0	
1 (91H) SAMPFREQ	FLAG	SET TO 1 FOR TWIN FORMAT		1									
		SAMPLING FREQUENCY TO RT/TC CODEC		M	B	L							
		000 UNSPECIFIED											
		001 48kHz NOMINAL											
		010 44.1kHz NOMINAL											
		011 32kHz NOMINAL											
1 (91H) FORMAT	DASH FORMAT VERSION	000 UNSPECIFIED											
		001 INDICATES DASH M, NORMAL DENSITY						0	0	1			
1 (91H) AUXTRKFO	AUX TRACK FORMAT	000 UNSPECIFIED											
2 (93H) AUXTRKFO	AUX TRACK FORMAT	000 UNSPECIFIED		0	1							0	
		XX0 INDICATES ANALOG CUE TRACKS											
		XX1 INDICATES PDM CUE TRACKS											
		X0X INDICATES AUX3 NO AUX DATA											
		X1X INDICATES AUX3 AUX DATA											
		0XX INDICATES TC UNMODULATED											
2 (93H) RESERVED	RESERVED BITS	1XX INDICATES TC MODULATED											
		(ALL UNLESS OTHERWISE SPECIFIED)											
3 (95H) RTATOCO1	RT ADDR 1 WITH OFFSET FROM SYSCON	NOT YET SPECIFIED, SET TO 000000				0	0	0	0	0	0	0	
4 (97H) RTATOCO2	RT ADDR 2 WITH OFFSET FROM SYSCON	M	6	5	4	3	2	1	0				
5 (99H) RTATOCO3	RT ADDR 3 WITH OFFSET FROM SYSCON	7	6	5	4	3	2	1	0				
6 (9BH) RTATOCO4	RT ADDR 4 WITH OFFSET FROM SYSCON	7	6	5	4	3	2	1	0				
		3	2	1	L	X	X	X	X				

NOTE: PRESET ALWAYS COMPLETE (DO NOT SKIP BYTES), NO TIME LIMIT.
 NOTE: BYTES 1,2 NOT TO BE CHANGED IN RECORD MODE.

PROCEDURE TO SET RT (TRANSMITTED TO HARDWARE):


1. CALCULATE NEW RT ADDRESS (WITH OFFSET).
2. SET RT BYTES 2..6:

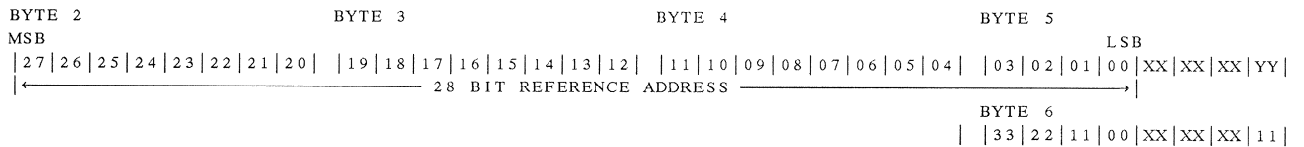

SET YY TO 00.

SEQUENCE FOR SETTING: BYTE 2 - -> BYTE 6.

3. SET CONTROL WORD (16 BITS):




TW: TWIN FLAG (SET TO 1)
 FS: SAMPLING FREQUENCY (SEE RX PARAGRAPH ABOVE)
 VE: DASH FORMAT VERSION (SET TO 001 FOR DASH M, NORMAL DENSITY)
 FO: AUX TRACK FORMAT (SEE RX PARAGRAPH ABOVE)
 Rn: RESERVED BITS

THERE IS NO TIME LIMIT FOR SETTING RT.

PROCEDURE TO READ RT (TRANSMITTED FROM HARDWARE):

RT TRANSMITTER ADDRESS OFFSET BYTE:

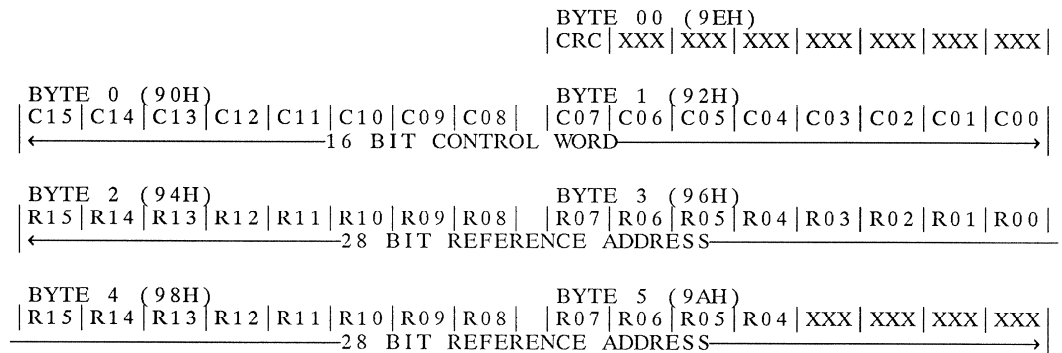

CRC: CRC ERROR FLAG. IF LOGICAL LO: NO ERROR.
 ACCESS SEQUENCE: READ BYTE 00 FIRST AND BYTE 5 LAST.
 BYTE 0 SETS A WRITE PROTECTION FLAG TO PREVENT FROM
 OVERWRITING DURING
 READ ACCESS; BYTE 5 RELEASES THE WRITE PROTECTION FLAG.
 TIME LIMIT FOR READING RT: < 4msec.

AUXTRKFO HANDLING: PLAY:
 SIGNALS /IAN/PDM/ AND /TCMOD/ ARE AUTOMATICALLY SET
 ACCORDING TO AUXTRKFO (SEE ABOVE).

RECORD: STUDER RECORDERS ALWAYS WRITE YX1 IN AUXTRKFO (CUE
 MODULATED). BIT Y IS SET ACCORDING TO /TXTCMOD/.

THE FLAG FOR AUX TRACK USAGE IS SET ACCORDING TO THE AUX4MIX
 SETTING. AUX4MIX = ON INDICATES AUX3 TRACK USED FOR AUXILIARY
 DATA (X1X). IN READ MODE, IN THIS CASE THE AUX 3 OUTPUT IS SET TO
 TTL LEVEL, ELSE TO NOMINAL LINE OUTPUT LEVEL. NOTE THAT IT IS
 NECESSARY TO START A RECORDING WITH THE EXACT AUX TRACK
 FORMAT SETTING, ALTHOUGH IT IS POSSIBLE TO OVERWRITE THE
 AUXTRKFO. A CONFLICTING SITUATION MAY EXIST WHEN A TRACK
 SEQUENTIAL RECORDING HAS BEEN MADE WITH AN ATTEMPT FOR
 DIFFERENT AUX4MIX SETTINGS. IN THIS CASE THE RECORDER WILL
 INHIBIT A DIFFERENT SETTING FROM THE ONE USED IN THE FIRST
 INSTANCE AND OUTPUT AN ERROR MESSAGE: INVALID AUX TRK SETTING.

OVERRIDING RT AUX TRACK FLAGS: ALL FLAGS (FS, TC, CUE, AUX4MIX) AS
 WRITTEN ON TAPE MAY BE DELIBERATELY OVERWRITTEN WITH
 SEVERAL KEYS. FS HANDLING IS SEPARATELY DESCRIBED. FOR ALL
 OTHER CASES (EXCEPT EMPHASIS): AN ERROR MESSAGE "AUTO MODE
 DISABLED" IS DISPLAYED IN THE LCD AND THE "ERROR" LED IS NOT
 FLASHING.

B) TC CODEC

TX ONLY:

TCREADY BYTE NO	SIG NAME	DESCRIPTION	MSB										
			BITS	7	6	5	4	3	2	1	0		
1 (B0H)	TCREADY	INITIALIZES TC TX FROM TC CODEC		X	X	X	X	X	X	X	X	X	X

NOTE: READ BYTE (B0H) IN ORDER TO INDICATE READ-OUT OF TC WORDS.

TCADDR, BYTE NO	TC BYTES SIG NAME	IN SEQUENTIAL ORDER DESCRIPTION	BITS	MSB										
				7	6	5	4	3	2	1	0			
2 (B2H)	BYTE 00	FRAME UNITS USER BITS	1	2	3	4	M	B	B	L				
	BYTE 01	FRAME TENS DROP FRAME FLAG (NOTE \$) COLOR FRAME FLAG (NOTE \$) USER BITS	1	2	3	4		B			M	L		
	BYTE 02	SECOND UNITS USER BITS	1	2	3	4	M	B	B	L				
	BYTE 03	SECOND TENS UNASSIGNED USER BITS	1	2	3	4		B		M	B	L		
	BYTE 04	MINUTES UNITS USER BITS	1	2	3	4	M	B	B	L				
	BYTE 05	MINUTES TENS UNASSIGNED USER BITS	1	2	3	4		B		M	B	L		
	BYTE 06	HOURS UNITS USER BITS	1	2	3	4	M	B	B	L				
	BYTE 07	HOURS TENS UNASSIGNED USER BITS	1	2	3	4		B	B	M	L			

PRESENT, BYTE NO	TCREAD SIG NAME	DESCRIPTION	BITS	MSB									
				7	6	5	4	3	2	1	0		
3 (B4H)	PRESENT	TC CODEC PRESENT	X	X	X	X	X	X	X	X	X	0	
	TCREAD	TC STATUS INDIC.: TC READ OFF TAPE	X	X	X	X	X	X	X	X	1	X	
	TCUP	FORWARD TAPE DIRECTION	X	X	X	X	X	1	X	X			

- TC READ SEQUENCING:**
- 1 SEND /TCREADY/.
 - 2 CHECK /TCREAD/, WHEN HI: TC = VALID, OTHERWISE BLANK DISPLAY.
 - 3 READ /TCUP/, INDICATES SEQUENCE OF FOLLOWING BYTES. BYTES ARRIVE IN REVERSE ORDER WHEN /TCUP/ = LO. THE BIT SEQUENCE WITHIN A BYTE IS ALWAYS PRESERVED.
 - 4 READ (B2H) 8 TIMES.

IGNORE /TCREAD/ IF TAPESPEED > 1.0 m/sec.

FORMATTING TC INFORMATION:

POSITION	0	9	8	7	6	5	4	3	2	1	
MODE 1:	A	H2	H1	M2	M1	S2	S1	F3	F2	F1	CODE
MODE 2:	A	U8	U7	U6	U5	U4	U3	U2	U1	U	USER BITS (HEX CHARACTERS)
MODE 3:	A	-	-	0	9	8	7	6	5	F	UNASSIGNED BITS (BIN. DIGITS)
ADDRESSES:	49	47	45	43	41	39	37	35	33	31	

F = FRAMES	U = USER BITS	0 = BIT 59
A = (t) TC	F = FLAGS	9 = BIT 58
		8 = BIT 43
U8 = BINARY GROUP 8	U4 = BINARY GROUP 4	7 = BIT 27
U7 = BINARY GROUP 7	U3 = BINARY GROUP 3	6 = BIT 11 (COLOR FRAME FLAG)
U6 = BINARY GROUP 6	U2 = BINARY GROUP 2	5 = BIT 10 (DROP FRAME FLAG)
U5 = BINARY GROUP 5	U1 = BINARY GROUP 1	

NOTE: ASCII-CHARACTERS ARE NOT DISPLAYED.

NOTE: TC VALIDITY CONFIRMATION:

- 1 CODE PRESENT ? IT IS ASSUMED THAT A VALID CODE IS RECEIVED WHEN A CONSECUTIVE TRANSITION FOLLOWS.
- 2 OUT-OF-RANGE DETECTION.
- 3 IS TRANSITION WITHIN EXPECTED WINDOW (0...75%) ?
- 4 SYNC WORD CORRECT ? 12 LOGICAL HI BITS ARE COUNTED.
- 5 ADDRESS PLAUSIBILITY CHECK.
- 6 IGNORE /TCREAD/ IF TAPESPEED >1.0 m/sec.

CRITERIA 1...4 ARE CHECKED BY HARDWARE. POS. 5 AND 6 ARE CHECKED BY THE SYSTEM CONTROLLER FOR DISPLAY PURPOSES ONLY.

THE LAST VALID FRAME IS FREEZED FOR A SHORT TIME IN ORDER TO REDUCE FLICKERING (SYSCON).

4 FRAMES ARE DISCARDED WHEN AN ERROR OCCURS. /TCREAD/ IS MORE STABLE UNDER THIS CONDITION (HARDWARE).

RX:

FRAMERA, TXTCMOD, ARPOFF, FREEZED, TCDELAY, TCMOD, FSTC, EETC

BYTE NO	SIG NAME	DESCRIPTION	MSB								
			7	6	5	4	3	2	1	0	
1 (B1H)	FREEZED	FREEZE CONTENT OF DRAM, ELSE ADAPT.	X	X	X	X	X	X	X	X	1
	ARPOFF	SELECT FIXED EQ TABLE, ELSE ADAPT.	X	X	X	X	X	X	X	1	X
	TCDELAY	TC OUTPUT DELAY ON, ELSE OFF	X	X	X	X	X	1	X	X	X
	TXTCMOD	WRITE MODULATED TC	X	X	1	X	X	X	X	X	X
	FRAMERA	TC FRAME RATE = 25, ELSE 29 OR 30	0	X	X	X	X	X	X	X	X
	EETC	EE LOOP TC ON	X	1	X	X	X	X	X	X	X
	TCMOD	TC MODULATED ON TAPE	X	X	X	1	X	X	X	X	X
	FSTC	FS=48 kHz, ELSE=44.1 OR 44.056 kHz	X	X	X	X	1	X	X	X	X

NOTE: TC READOUT FOR TAPE SPEED <1m/sec. POSSIBLE. TAPE NEEDS TO BE IN CONTACT WITH READ HEAD. MOVE LIFTER IN AFTER SEQUENCE WIND, THEN STOP, PLAY, REC, LOC, TAPE DUMP, EDIT, IF TAPE SPEED 1m/sec.

NOTE: /TXTCMOD/ TO BE SET TOGETHER WITH APPROPRIATE BIT IN RT CONTROL WORD.

NOTE: /TCDELAY/ IS ENABLED IN PLAY MODE ONLY (AUTO MODE FROM KEYBOARD). OVERRIDE BY REMOTES AND/OR KEYBOARD POSSIBLE WHEN IN AUTO MODE.

RUN PROCESSOR 1.861.860/760

TAPETYPE, ARPOFF, FREEZED, MVARI

BYTE NO	SIG NAME	DESCRIPTION	BITS								
			7	6	5	4	3	2	1	0	
1 (B1H)	FREEZED	FREEZE CONTENT OF DRAM, ELSE ADAPT.	X	X	X	X	X	X	X	X	1
	ARPOFF	SELECT FIXED EQ TABLE, ELSE ADAPT.	X	X	X	X	X	X	X	1	X
	MVARI	TAPE SPEED LESS THAN 14.47 IPS.NOTE*	X	X	X	X	X	1	X	X	X
	TAPETYPE	TAPE TYPE A, ELSE B	X	X	X	X	0	X	X	X	X

NOTE*: /MVARI/ NOT USED ANYMORE.

NOTE: ADAPTIVE/TRANSPARENT (TABLE)/FREEZED MODE: THE TRANSPARENT MODE (/ARPOFF/) OR "REFERENCE EQ TABLE" IN THE ALIGNMENT MENU BYPASSES THE ADAPTIVE PROCESS, THUS PERMITTING TO WORK WITH ONE OF TWO POSSIBLE ROM TABLES (SELECTED WITH /TAPETYPE/). ALL PREVIOUSLY STORED OFFSET VALUES FROM THIS TABLE IN RAM ARE SAFED AND IMMEDIATELY AVAILABLE WHEN ACTIVATED IN ADAPTIVE MODE (/FREEZED/ DISABLED).

THE FROZEN MODE STOPS ADAPTATION. PREVIOUS VALUES IN RAM ARE SAFED AND NOT CHANGED ANYMORE. SEE CRITERIA BELOW FOR USE OF

THE FROZEN MODE. THE MODE IS ACTIVATED ONLY TO PROTECT THE ADAPTIVE RUN PROCESSOR FROM ANY POSSIBLE ERRONEOUS ADAPTATION TO NON-VALID DATA. LOCAL ACTIVATION (FROM KEYBOARD) POSSIBLE.

MENU STRUCTURE:

IN "ALIGNMENT AUDIO" :

RECORD CURRENT B +/-	DISPLAY RECORD CURRENT VALUE
REFERENCE EQ TABLE (selected)	SELECT TABLE, SEND COMMAND /ARPOFF/, DISPLAY "SELECTED" WHEN ACTIVATED WITH STORE.
STOP ADAPTATION (selected)	FREEZE CONTENT OF DRAM, SEND COMMAND /FREEZED/, DISPLAY "SELECTED" WHEN ACTIVATED WITH STORE.
PAR. BACKUP RS232 VERIFY SAFE LOAD	

NOTE ON FROZEN TABLE MODE:
THE CRITERIA TO STOP ADAPTATION ARE:

- 1 /REPMUTE/ ACTIVE (FROM DAPRO) FROM MORE OR EQUAL TO ONE CHANNEL.
- 2 NOT IN PLAY (OR RECORD) MODE.

NOTE THAT THE ADAPTIVE RUN PROCESSOR IS FURTHER PROTECTED BY CIRCUITRY ON THE DETECTOR II BOARD WHICH DISCONNECTS POWER TO THE COMPARATORS WHEN THE SAME CONDITION AS 2 ABOVE OCCURS. NO INVALID TRANSITIONS SHOULD REACH THE RUN PROCESSOR, I.E. DUE TO RFI OR EMI TO THE HEADS.

TIME CODE DELAYS VS. DIGITALAUDIO DELAYS

CELLS BLOCKS	REPRO DELAY OFF		25 FR.		29, 30 Fr.	
	DELAY {msec.}					
48 kHz	---	166.5	477	238.5	572	238.5
	83		120		120	
44.1 kHz 44.056 kHz	---	166.5	521 (1)	238.5	624 (2)	238.5
	91		131 (3)		131 (3)	
←- INPUT DELAY -→			←- REPRO DELAY -→			

THE NUMBERS ABOVE ARE EXACT VALUES. ACTUAL (IMPLEMENTED) VALUES WITH BOARD 1.861.761.21: (VERSIONS -22 UP HAVE EXACT VALUES)
 (1) ERROR = 44 CELLS = 1/4 FRAME
 (2) ERROR = 52 CELLS = 1/3 FRAME
 (3) ERROR = 11 msec. (120 msec. IMPLEMENTED).

NOTE: FS HANDLING:
 THE MASTER HAS NO A PRIORI INFORMATION ABOUT THE SAMPLING FREQUENCY. IN A MUTUAL AGREEMENT IT IS DECIDED, THAT ALWAYS THE TOP LED ON THE SECONDARY KEYBOARD INDICATES THE HIGHER FS. THEREFORE THE MASTER TRANSMITS ONLY "FS HI" OR "FS LO". IN "FS LO" THE KEY IS ILLUMINATED. DURING POWER UP, THE SYSCON TESTES

T+T (/FSSET/, 80H) ON CRYSTAL-CONFIGURATION (REPLACING VCXO-BOARDS IN OPERATION IS NOT PERMITTED) AND STORES THE CRYSTAL (HARDWARE) SET IN REGISTERS, DESIGNATED "XTALFS".

OUTPUTS FROM SYSCON:

2 TEMPORARY REGISTERS "ACTFS" AND "ACTTS" STORE THE ACTUAL FS AND ACCOMPAGNING TAPE SPEED (TS) RESPECTIVELY. UPDATING THESE REGISTERS IS SUBJECT TO MEASURES DESCRIBED BELOW. THE REGISTER "ACTTS" DIRECTLY CONTROLS THE TAPE DECK MPU'S COMMAND SET "SPS" VIA MASTER MPU (TS). THE REGISTER "ACTFS" CONTROLS

- THE MASTER MPU (ACTFS) FOR DISPLAY AND CONVERSION
- T+T (/MCCONW2/, 87H). DIVIDER RATIOS, ETC.
- RT CODEC (/SAMPFREQ/,91H). ADDRESS CONTENT
- TC CODEC (/SYSCFS/,B1H), TO RUN PROCESSOR
- DAPRO IF VIA GAINS CONTROL (/DDEMPH/, 51H), DO
- TIME DISPLAY CONVERSION ROUTINES. ALL ARE DESIGNATED RECEIVERS OF THE SYSCON.

INPUTS TO SYSCON:

A) W/O DI: AA) FROM TERMINAL:

COMMANDS FROM THE TERMINAL UPDATE "ACTFS" AND "ACTTS" DIRECTLY. "XTALFS" IS NOT TESTED. A CORRECT INPUT T-REFEXT IS ASSUMED. OVERRIDING BY QUIT-COMMAND ONLY. THEN, THE CONTENT OF REGISTER "FSIN" IS SELECTED (PREVIOUS VALUE). IN RECORD, COMMAND ARE NOT ACCEPTED.

AB) PLAY:

(COMMANDS FROM KEYBOARD OR RT CODEC) INDEPENDENT ON PREVIOUS STATUS, FS IS SET ACCORDING TO /RTADDR0/ (90H) FROM RT CODEC. THE INFO IS CHECKED AGAINST "XTALFS". IF THERE IS A MISMATCH, AN ERROR MSG TYPE B IS DISPLAYED. IF THERE IS NO VALID INFO FROM RT CODEC, SYSCON SELECTS /TSLO/. IF THE INFO IS STILL INVALID, AN ERROR MSG TYPE B IS DISPLAYED: FORMAT MISMATCH; ASSUMING THAT NO RT HAS BEEN WRITTEN. TIME-OUT FOR EVERY NEW ACTION = 10 SECTORS (20msec.). DO-BYTE 00, /DDEMPH/: BITS 6,7 = 00 WHEN FS = 44.056, OTHERWISE AS SPECIFIED BY AES/EBU FORMAT. OVERRIDE DISABLED. IF THE FS IS UNSPECIFIED IN THE RT ADDRESS (000), OVERRIDE BY TOGGLE SWITCH IS ENABLED. DISPLAY: "FS UNSPECIFIED", MSG TYPE A.

AC) STOP:

FS MAY BE CHANGED ANY TIME FROM KEYBOARD.

AD) RECORD (RT):

FS IS RECORDED ACCORDING TO PREVIOUS STATUS.

B) WITH DI: BA) STOP OR INPUT MODE:

BIT PATTERNS 01,10,11: RECORDER IS SET ACCORDINGLY AFTER CHECK WITH "XTALFS". OVERRIDING BY TOGGLE SWITCH NOT POSSIBLE. IF CHECK FAILS: ERROR MSG TYPE B. PATTERN 00: THE PREVIOUS STATE IS KEPT IN "ACTFS". OVERRIDING ENABLED.

NOTE: VALID ONLY, IF D820X IS SET TO DIGITAL INPUT.

BB) RECORD (RT):

AS ABOVE. THE SYSCOM COMPARES /DIEMPH/ (58H) WITH /RTADDR0/ (90H). IF BOTH ARE NOT EQUAL (I.E. IN RT SYNC MODE), AN ERROR MSG TYPE B IS DISPLAYED AND THE TAPE TRANSPORT IS BROUGHT IN STOP MODE.

BC) PLAY:

INPUTS FROM KEYBD, RT, DI. PRIORITY LEVELS: 1=DI, 2=RT, 3=KEYBD.

NOTE: ERRONEOUS PLAYBACK POSSIBLE IF DI NOT SET ACCORDING TO RT (SPEED AND FS DEVIATION). ERROR MSG IN LCD ONLY.

PLAY (KEY "RT SYNC" ENABLED)		RECORD (KEY "RT SYNC" DISABLED)		
X	SERVO CONTROLLED BY DATA	Y	SERVO CONTROLLED BY RT ! (*)	
X	RT MODE: READ RT	Y	RT MODE: READ ONLY ! (*)	
X	LED "RT SYNC" : OFF	Y	LED "RT SYNC" : FLASHING (*)	
Z	SERVO CONTROLLED BY RT	T	U	SERVO CONTROLLED BY CRYSTAL
		T	U	RT MODE: WRITE RT
Z	RT MODE: READ RT	T	U	LED "RT SYNC" : OFF
		T	V	SERVO CONTROLLED BY RT (**)
Z	LED "RT SYNC" : ON	T	V	RT MODE: READ ONLY
		T	V	LED "RT SYNC" : FLASHING

X = KEY "RT SYNC" OFF
 Z = KEY "RT SYNC" ON
 Y = CH 1 OR CH 2 SAFE
 T = CH 1 AND CH 2 : READY
 U = KEY "RT SYNC" OFF
 V = KEY "RT SYNC" ON
 (*) = INDEPENDENT OF KEY "RT SYNC"
 (**) = IF THE TAPE CONTAINS NO RT, THE TAPE DECK ESTABLISHES "STOP" MODE AND THE MESSAGE "NO REFERENCE TRACK" IS DISPLAYED.

VIDEO-/FILM-CLOCKS VS. SAMPLING FREQUENCIES

ORIGIN	LINES	FRAMES	RELATIONSHIP TO SAMPL. FREQUENCIES			
			sec.	32	44.1/1.001	44.1
NTSC monochrome	525	30,60	(15/16)	---	1470	1600
NTSC color	525	30/1.001	---	1470	---	(8008/5)
PAL monochr./col.	625	25	1280	---	1764	1920
FILM	---	48	---	---	---	1000

IN ALL CASES WHERE NO SIMPLE INTEGER RATIO EXISTS (DENOTED BY --- OR NUMBERS IN BRACKETS), AN ERROR MESSAGE IS DISPLAYED IN THE LCD DISPLAY, READING "NO INTEGER RATIO", AND THE RED "ERROR" LED IS FLASHING.

3.3.5 ANALOG INPUT 1.861.752/753

COBUS: RX (2BRECEX)

ANAGAIN BYTE NO	SIG NAME	DESCRIPTION	BITS	MSB							
				7	6	5	4	3	2	1	0
1 (21H)	ANAGAIN1	LINE INPUT LEVEL	M	B	B	B	B	B	B	B	L
2 (23H)	ANAGAIN2	EXAMPLE: 0dBm (=MIN)	0	0	0	1	1	0	1	0	0
		EXAMPLE: 6dBm	0	0	1	1	0	0	1	1	1
		MAX (=20dBm)	1	1	1	1	1	1	1	1	1

ADDRESS 21H VALID FOR CH1, 23H FOR CH2.

NOTE: DEFAULT VALUE = 6dBm.
NOTE: /MAINMUTE/ AND /EMPHASIS/ FED OVER DEDICATED LINES FROM GAINS CONTROL.

3.3.6 ANALOG OUTPUT 1.861.751.00

COBUS: RX (2BRECEX)

ANAGAIN			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
2 (2DH)	ANAGAIN4	LINE OUTPUT LEVEL		M	B	B	B	B	B	B	L
1 (2FH)	ANAGAIN3	EXAMPLE : 0 dBm (=MIN)		0	0	0	1	1	0	1	0
		EXAMPLE : 6 dBm		0	0	1	1	0	0	1	1
		MAX (= 20 dBm)		1	1	1	1	1	1	1	1

ADDRESS 2FH VALID FOR CH1, 2DH FOR CH2.

NOTE: DEFAULT VALUE = 6dBm.

NOTE: /MAINMUTE/ AND /EMPHASIS/ FED OVER DEDICATED LINES FROM GAINS CONTROL.

**3.4
ELECTRONICS RACK 1.861.310.00**

**3.4.1
PDM CONTROL 1.861.813.00**

COBUS: RX, TX (8BRECEX, 8BTRMEX)

THIS BOARD SUPPLIES	- PDM MODULATOR	1.861.811.00
	- PDM DEMODULATOR	1.861.812.00
	- ANALOG ROUTING	1.861.814.00
	- CUE/PQ DELAY	1.861.816.00
	- QUALITY DISPLAY	1.861.731.00
	- MP AMPLIFIER	1.861.746.00

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	1	IAN/PDM	PDM OR ANALOG SIGNAL ON TAPE
2	1	MON/STE	CUE TRACKS STEREO OR MONO (MIX)
3	1	CHASELB	CHANNEL SELECT BIT B
4	1	CHASELA	CHANNEL SELECT BIT A
5	1	MONSELB	MONITOR SELECT BIT B
6	1	MONSELA	MONITOR SELECT BIT A
7	1	EEPDM	EE LOOP PDM
8	1	MPSMUTE	MONITOR PANEL SPEAKER MUTING
9	1	PRESENT	PDM CONTROL PRESENT
10	8	CUE1GAIN	LINE LEVEL CUE 1, 0...20dBV.7
11	8	CUE2GAIN	LINE LEVEL CUE 2, 0...20dBV.7
12	8	QUALDISL	SIGNAL QUALITY DISPLAY DATA (PROCESSED), LEFT
13	8	QUALDISR	SIGNAL QUALITY DISPLAY DATA (PROCESSED), RIGHT
14	1	EMPHASIS	EMPHASIS TO PDM MODULATOR
15	1	HISDPDM	AUX 3, 4: SELECT RESONATOR @ TS=1m/sec.
16	1	MON/STE1	AS MON/STE, BUT INVERTED IN AUX4MIX & INPUT

TX ONLY:

PRESENT			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
1 (A0H)	PRESENT	PDM CONTROL PRESENT		X	X	X	X	X	X	X	0

RX:

MPSMUTE			MSB								
BYTE NO	SIG NAME	DESCRIPTION	BITS	7	6	5	4	3	2	1	0
2 (A3H)	MPSMUTE	MONITOR SPEAKER MUTED, SEE \$\$\$		X	X	X	X	X	X	0	X

NOTE: THIS BIT IS SENT TO MP AMPLIFIER 1.861.746.00
NOTE \$\$\$: MONITOR SPEAKER MUTING MODES:
 1 POWER-UP
 2 MAINMUTE
 3 SPEAKER OFF/ON

DEFINITIONS OF AUTOMUTE, AUTOEDIT, AUTOINPUT A, B:

- 1 **AUTOMUTE:** (CUE OUTPUTS ONLY): CUE1GAIN AND CUE2GAIN SET TO 00H IN WIND MODE ONLY.
- 2 **AUTOEDIT:** (MONITOR SPEAKERS ONLY)
 - 2.1 **ON:** IN PLAY, REC: MONSEL SET TO DIGITAL (PCM PLAYBACK). IN STOP, EDIT, WIND, TAPE DUMP: MONSEL SET TO CUE TRACKS. OVERRIDING BY KEYS ON PANELS IN ALL MODES POSSIBLE. STATUS RESTORED BY PRESSING STOP.
 - 2.2 **OFF:** MONSEL SET TO CUE TRACKS IN ALL TAPE DECK MODES. OVERRIDING BY KEYS ON PANELS POSSIBLE. STATUS WILL NOT BE RESTORED.
- 3 **AUTOINPUT:** (DIGITALAUDIO OUTPUTS ONLY)
 - 3.1 **A:** ALL CH TO INPUT IN STOP, WIND, LOC, ROLLBACK (CRAZCANA)
 - B:** ALL READY CH TO INPUT IN STOP, WIND, LOC, ROLLBACK (CRAZAMER). IN AUTOINPUT A, AS WELL AS AUTOINPUT B, OVERRIDING IS POSSIBLE BY KEYS ON CHANNEL CONTROL PANEL (CCP) AND MONITOR PANEL (MP).

ANALOG ROUTING 1.861.814.00

MONSEL, CHASEL BYTE NO	SIG NAME	DESCRIPTION	MSB							
			BITS	7	6	5	4	3	2	1
1 (A1H)	MONSELA	MONITOR CONNECTED TO DIGITAL	X	X	X	X	X	X	0	0
	MONSELB	MONITOR CONNECTED TO CUE TRACKS	X	X	X	X	X	X	0	1
		MONITOR CONNECTED TO TC	X	X	X	X	X	X	1	0
	CHASELA	CHANNELS 1 + 2 ACTIVE	X	X	X	X	0	0	X	X
	CHASELB	CHANNEL 2 ACTIVE	X	X	X	X	0	1	X	X
		CHANNEL 1 ACTIVE	X	X	X	X	1	0	X	X

CUE1GAIN (MIX OR CH1) BYTE NO	SIG NAME	DESCRIPTION	MSB							
			BITS	7	6	5	4	3	2	1
3 (A5H)	CUE1GAIN	LINE OUTPUT LEVEL CUE1 MIN=AUTOMUTE	0	0	0	0	0	0	0	0
		EXAMPLE: 0 dBm	0	0	0	1	1	0	1	0
		EXAMPLE: 6 dBm	0	0	1	1	0	0	1	1
		MAX (=20 dBm)	1	1	1	1	1	1	1	1

DEFAULT VALUE = 6dBm

CUE2GAIN (CH2 OR AUX3) BYTE NO	SIG NAME	DESCRIPTION	MSB							
			BITS	7	6	5	4	3	2	1
4 (A7H)	CUE2GAIN	LINE OUTPUT LEVEL CUE2 MIN=AUTOMUTE	0	0	0	0	0	0	0	0
		EXAMPLE: 0 dBm	0	0	0	1	1	0	1	0
		EXAMPLE: 6 dBm	0	0	1	1	0	0	1	1
		EXAMPLE: TTL LEVEL (5.0Vp)	0	0	0	1	0	1	1	0
		MAX (=20 dBm)	1	1	1	1	1	1	1	

DEFAULT VALUE = 6dBm OR TTL LEVEL.

NOTE: SEND TTL LEVEL, IF AUX4MIX=TRUE. OVERRIDING INHIBITED.

PDM MODULATOR 1.861.811.00

MON/STE BYTE NO	EMPHASIS SIG NAME	DESCRIPTION	MSB							
			BITS	7	6	5	4	3	2	1
1 (A1H)	MON/STE	CUE TRACKS STEREO, ELSE MONO=MIX	X	X	X	1	X	X	X	X
	EMPHASIS	EMPHASIS ON	0	X	X	X	X	X	X	X

PDM DEMODULATOR 1.861.812.00

MON/STE BYTE NO	IAN/PDM SIG NAME	HISPDPDM DESCRIPTION	MSB							
			BITS	7	6	5	4	3	2	1
1 (A1H)	IAN/PDM	PDM SIGNAL ON TAPE	X	X	1	X	X	X	X	X
	MON/STE	CUE TRACKS STEREO	X	X	X	1	X	X	X	X
	HISPDPDM	RESONATOR FOR TS>1m/sec. SELECTED	X	0	X	X	X	X	X	X

NOTE: HISPDPDM IS IN SYSCON-STATUS MEMORY 0580 (HI) AND 0581 (LO BYTE)

NOTE: IAN/PDM: NO AUTO MODE. TO BE SET MANUALLY.

EEPDM										
BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
2 (A3H)	EEPDM	EE LOOP PDM ON	X	X	X	X	X	X	X	0
	MON/STE1	CUE TRACKS STEREO. AUX3 SPECIAL SEE TABLE BELOW FOR INPUT/REPRO CONF	X	X	X	X	X	*	X	X
BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
6 (ABH)		NOT USED	M	B	B	B	B	B	B	L

TRANSLATION TABLE IAN/PDM, MON/STE, DEEMPHASIS FOR ANALOG
 MIX/CUE, PDM/ANA, AUTO SETTING
 MIX DENOTES MON, CUE DENOTES STE
 EEPDM

<<<HARDWARE
 <<<SOFTWARE
 <<<HARDWARE/SOFTWARE

PDM DEMODULATOR		REPRO				INPUT			
		IAN		PDM		IAN		PDM	
		MON	STE	MON	STE	MON	STE	MON	STE
IAN/PDM PDM=1	AUX3	0	0	0	1	1*	0	1*	1
	AUX4	0	0	1	1	0	0	1	1
DEEMPHASIS ON=1	AUX3	0	1	0	X	0	1	0	X
	AUX4	1	1	X	X	1	1	X	X

NOTE: SIGNAL MON/STE1 FOR DEMODULATOR ONLY INVERSE TO MON/STE IN CONFIGURATIONS DENOTED WITH ASTERSISK (*) {AUX4MIX & INPUT & CUE MODE ONLY}

CUE/PQ DELAY 1.861.816.00

MON/STE										
BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
1 (A1H)	MON/STE	CUE TRACKS STEREO, ELSE MONO=MIX	X	X	X	1	X	X	X	X

QUALITY DISPLAY 1.861.731.00

QUALDISL			MSB							
BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
5 (A9H)	QUALDISL	SIG QUAL CH1 (GRN) QP1 CORRECTION	0	0	0	0	0	0	0	1
		SIG QUAL CH1 (GRN) QP2 CORRECTION	0	0	0	0	0	0	0	1
		SIG QUAL CH1 (GRN) FINGERPRINT	0	0	0	0	0	0	1	0
		SIG QUAL CH1 (GRN) TRACKLOSS	0	0	0	0	1	0	0	0
		SIG QUAL CH1 (YEL) INTERPOLATION 2	0	0	0	1	0	0	0	0
		SIG QUAL CH1 (YEL) INTERPOLATION 1	0	0	1	0	0	0	0	0
		SIG QUAL CH1 (RED) MUTE	0	1	0	0	0	0	0	0
		SIG QUAL CH1 (RED) NO DATA	1	0	0	0	0	0	0	0

QUALDISR			MSB							
BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
7 (ADH)	QUALDISR	SIG QUAL CH2 (GRN) QP1 CORRECTION	0	0	0	0	0	0	0	1
		SIG QUAL CH2 (GRN) QP2 CORRECTION	0	0	0	0	0	0	1	0
		SIG QUAL CH2 (GRN) FINGERPRINT	0	0	0	0	0	1	0	0
		SIG QUAL CH2 (GRN) TRACKLOSS	0	0	0	0	1	0	0	0
		SIG QUAL CH2 (YEL) INTERPOLATION 2	0	0	0	1	0	0	0	0
		SIG QUAL CH2 (YEL) INTERPOLATION 1	0	0	1	0	0	0	0	0
		SIG QUAL CH2 (RED) MUTE	0	1	0	0	0	0	0	0
		SIG QUAL CH2 (RED) NO DATA	1	0	0	0	0	0	0	0

	QUALDISL (A9H)								QUALDISR (ADH)							
ADDR. :	80	40	20	10	08	04	02	01	01	02	04	08	10	20	40	80

NOTE: FOR THE COMPOSITION OF SQ-DATA SEE PAR. 3.2, CODEC CONTROL.

**3.5
CHANNEL CONTROL PANEL 1.861.370.00**

COBUS: RX, TX (8BRECEX, 8BTRMEX)

COBUS ELECTRONICS LOCATED ON CCP TRANSCEIVER 1.861.744.00 WHICH FEEDS CCP KEYBOARD 1.861.743.00

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	1	SAFECH1	KEY SAFE CH 1
2	1	SAFECH2	KEY SAFE CH 2
3	1	SAFETC	KEY SAFE TC
4	1	SAFEAUX	KEY SAFE AUX
5	1	READYCH1	KEY READY CH 1
6	1	READYCH2	KEY READY CH 2
7	1	READYTC	KEY READY TC
8	1	READYAUX	KEY READY AUX
9	1	CH1 INPUT	KEY CH 1 TO INPUT
10	1	CH1 SYNC	KEY CH 1 TO SYNC
11	1	CH1 REPRO	KEY CH 1 TO REPRODUCE
12	1	CH2 INPUT	KEY CH 2 TO INPUT
13	1	CH2 SYNC	KEY CH 2 TO SYNC
14	1	CH2 REPRO	KEY CH 2 TO REPRODUCE
15	1	PRESENT	CCP PRESENT
16	1	TC INPUT	KEY TC TO INPUT
17	1	TCSYNC	KEY TC TO SYNC
18	1	TCREPRO	KEY TC TO REPRODUCE
19	1	AUX INPUT	KEY AUX 3 TO INPUT IF IN MIX MODE
20	1	AUX SYNC	KEY AUX 3 TO SYNC IF IN MIX MODE
21	1	AUX REPRO	KEY AUX 3 TO REPRO IF IN MIX MODE
22	1	BULSAFE1	LED SAFE CH 1
23	1	BULSAFE2	LED SAFE CH 2
24	1	BULSAFTC	LED SAFE TC
25	1	BULSAAUX	LED SAFE AUX
26	1	BULRDY1	LED READY CH 1
27	1	BULRDY2	LED READY CH 2
28	1	BULRDYTC	LED READY TC
29	1	BULRYAUX	LED READY AUX
30	1	BUL1 INPT	LED CH 1 TO INPUT
31	1	BUL1 SYNC	LED CH 1 TO SYNC
32	1	BUL1 RPRO	LED CH 1 TO REPRODUCE
33	1	BUL1 REC	LED CH 1 TO RECORD
34	1	BUL2 INPT	LED CH 2 TO INPUT
35	1	BUL2 SYNC	LED CH 2 TO SYNC
36	1	BUL2 RPRO	LED CH 2 TO REPRODUCE
37	1	BUL2 REC	LED CH 2 TO RECORD
38	1	BULTC IN	LED TC TO INPUT
39	1	BULTCSYC	LED TC TO SYNC
40	1	BULTCREP	LED TC TO REPRODUCE
41	1	BULTCREC	LED TC TO RECORD
42	1	BULAUX IN	LED AUX 3 TO INPUT
43	1	BULAUX SY	LED AUX 3 TO SYNC
44	1	BULAUX RP	LED AUX 3 TO REPRODUCE
45	1	BULAUX RC	LED AUX 3 TO RECORD

TX ONLY:

BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
1 (C0H)	SAFECH1	KEY SAFE CH 1 ON	X	X	X	X	X	X	X	1
	SAFECH2	KEY SAFE CH 2 ON	X	X	X	X	X	X	1	X
	SAFETC	KEY SAFE TC ON	X	X	X	X	X	1	X	X
	SAFEAUX	KEY SAFE AUX ON	X	X	X	X	1	X	X	X
	READYCH1	KEY READY CH 1 ON	X	X	X	1	X	X	X	X
	READYCH2	KEY READY CH 2 ON	X	X	1	X	X	X	X	X
	READYTC	KEY READY TC ON	X	1	X	X	X	X	X	X
	READYAUX	KEY READY AUX ON	1	X	X	X	X	X	X	X

BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
2 (C2H)	CH1INPUT	KEY CH 1 TO INPUT ON	X	X	X	X	X	X	X	1
	CH1SYNC	KEY CH 1 TO SYNC ON	X	X	X	X	X	X	1	X
	CH1REPRO	KEY CH 1 TO REPRO ON	X	X	X	X	X	1	X	X
	CH2INPUT	KEY CH 2 TO INPUT ON	X	X	X	1	X	X	X	X
	CH2SYNC	KEY CH 2 TO SYNC ON	X	X	1	X	X	X	X	X
	CH2REPRO	KEY CH 2 TO REPRO ON	X	1	X	X	X	X	X	X
	PRESENT	CCP PRESENT	0	X	X	X	X	X	X	X
3 (C4H)	TCINPUT	KEY TC TO INPUT ON	X	X	X	X	X	X	X	1
	TCSYNC	KEY TC TO SYNC ON	X	X	X	X	X	X	1	X
	TCREPRO	KEY TO REPRO ON	X	X	X	X	X	1	X	X
	AUXINPUT	KEY AUX 3 TO INPUT ON	X	X	X	1	X	X	X	X
	AUXSYNC	KEY AUX 3 TO SYNC ON	X	X	1	X	X	X	X	X
	AUXREPRO	KEY AUX 3 TO REPRO ON	X	1	X	X	X	X	X	X

RX:

BYTE NO	SIG NAME	DESCRIPTION	BITS							
			7	6	5	4	3	2	1	0
1 (C1H)	BULSAFE1	LED SAFE CH 1 ON	X	X	X	X	X	X	X	1
	BULSAFE2	LED SAFE CH 2 ON	X	X	X	X	X	X	1	X
	BULSAFTC	LED SAFE TC ON	X	X	X	X	X	1	X	X
	BULSAAUX	LED SAFE AUX ON	X	X	X	X	1	X	X	X
	BULRDT1	LED READY CH 1 ON	X	X	X	1	X	X	X	X
	BULRDY2	LED READY CH 2 ON	X	X	1	X	X	X	X	X
	BULRDYTC	LED READY TC ON	X	1	X	X	X	X	X	X
	BULRYAUX	LED READY AUX ON	1	X	X	X	X	X	X	X
2 (C3H)	BUL1INPT	LED CH 1 TO INPUT ON	X	X	X	X	X	X	X	1
	BUL1SYNC	LED CH 1 TO SYNC ON	X	X	X	X	X	X	1	X
	BUL1RPRO	LED CH 1 TO REPRO ON	X	X	X	X	X	1	X	X
	BUL1REC	LED CH 1 TO RECORD ON	X	X	X	X	1	X	X	X
	BUL2INPT	LED CH 2 TO INPUT ON	X	X	X	1	X	X	X	X
	BUL2SYNC	LED CH 2 TO SYNC ON	X	X	1	X	X	X	X	X
	BUL2RPRO	LED CH 2 TO REPRO ON	X	1	X	X	X	X	X	X
	BUL2REC	LED CH 2 TO RECORD ON	1	X	X	X	X	X	X	X
3 (C5H)	BULTCIN	LED TC TO INPUT ON	X	X	X	X	X	X	X	1
	BULTCSYC	LED TC TO SYNC ON	X	X	X	X	X	X	1	X
	BULTCREP	LED TO REPRO ON	X	X	X	X	X	1	X	X
	BULTCREC	LED TO RECORD ON	X	X	X	X	1	X	X	X
	BULAUXIN	LED AUX 3 TO INPUT ON	X	X	X	1	X	X	X	X
	BULAUXSY	LED AUX 3 TO SYNC ON	X	X	1	X	X	X	X	X
	BULAUXRP	LED AUX 3 TO REPRO ON	X	1	X	X	X	X	X	X
	BULAUXRC	LED AUX 3 TO RECORD ON	1	X	X	X	X	X	X	X

SAFE/READY CONCEPT:**A) RECORD MODE**

KEY RECORD AND LED RECORD ILLUMINATED.

QUIT WITH SAFE KEY. IF NO CHANNEL IN RECORD ANYMORE: RECORD KEY NOT ILLUMINATED. SAFE KEY ILLUMINATED WHEN ACTIVATED. READY KEY DISABLED.

RECORD AGAIN WITH SAFE ACTIVATED: IF NO CHANNEL IN READY, RECORD KEY NOT ILLUMINATED. ALWAYS: CHANNELS SET IN SAFE STATUS ARE PROTECTED FROM OVERWRITING. READY KEY ENABLED.

PREPARING FOR RECORD: ACTIVATE READY KEY. KEY WILL TURN ON. WHEN RECORD ADDITIONALLY PRESSED: LED RECORD TURNS ON AND READY IS NOT ILLUMINATED ANYMORE (NOTE: IF THE RECORDER IS ALREADY IN RECORD, PRESSING READY ALONE IS NOT SUFFICIENT, RECORD MUST BE ACTIVATED ADDITIONALLY).

B) REPRODUCE MODE

SAFE AND READY KEYS ENABLED. KEY AND LED'S RECORD WILL NEVER TURN ON. APPROPRIATE SAFE/READY STATUS DISPLAYED.

**C) LED COLOR
ASSIGNMENT**

RECORD : RED
SAFE : YEL
READY : GRN

**D) S/R FUNCTIONS IN
MENU**

FUNCTIONALLY TREATED IN THE SAME MANNER AS DESCRIBED ABOVE. INDICATION ONLY IF KEYS WITH LED HAVE BEEN ASSIGNED. RECORD MODE INDICATION WITH RECORD KEY ONLY. NO OTHER COLORS THAN YELLOW FOR LED AVAILABLE.

3.6 MONITOR PANEL 1.861.365.00

COBUS: RX, TX (2BRECTRM)

COBUS LOCATED ON MP AMPLIFIER 1.861.746.00 WHICH FEEDS MP
KEYBOARD 1.861.745.00

OVERVIEW OF ALL COMMANDS LISTED IN THIS SECTION:

POS	BITS	COMMAND	DESCRIPTION
1	1	KINTAP	KEY INPUT/TAPE
2	1	KMPCH1	KEY CH 1 (REPRODUCE DIGITAL TRACK)
3	1	KMPCH2	KEY CH 2 (REPRODUCE DIGITAL TRACK)
4	1	KMPTC	KEY TC
5	1	KMPCUE1	KEY CUE 1 OR MIX
6	1	KMPCUE2	KEY CUE 2 OR AUX 3
7	1	PRESENT	MP PRESENT
8	1	BMPINP	LED INPUT
9	1	BMPTAP	LED TAPE
10	1	BMPCH1	LED CH 1
11	1	BMPCH2	LED CH 2
12	1	BMPCUE1	LED CUE 1
13	1	BMPMIX	LED MIX
14	1	BMPCUE2	LED CUE 2
15	1	BMPAUX	LED AUX 3

TX ONLY:

BYTE NO	SIG NAME	DESCRIPTION	MSB									
			BITS	7	6	5	4	3	2	1	0	
1 (D0)	KINTAP	KEY INPUT/TAPE TO INPUT ACTIVE		X	X	X	X	X	X	X	X	1
	KMPCH1	KEY CH 1 ACTIVE		X	X	X	X	X	X	X	1	X
	KMPCH2	KEY CH 2 ACTIVE		X	X	X	X	X	X	1	X	X
	KMPTC	KEY TC ACTIVE		X	X	X	1	X	X	X	X	X
	KMPCUE1	KEY CUE 1 OR MIX ACTIVE		X	X	1	X	X	X	X	X	X
	KMPCUE2	KEY CUE 2 OR AUX 3 ACTIVE		X	1	X	X	X	X	X	X	X
	PRESENT	MP PRESENT		0	X	X	X	X	X	X	X	X

RX:

BYTE NO	SIG NAME	DESCRIPTION	BITS								
			7	6	5	4	3	2	1	0	
1 (D1)	BMPINP	LED INPUT ON	X	X	X	X	X	X	X	X	0
	BMPTAP	LED TAPE ON	X	X	X	X	X	X	0	X	
	BMPCH1	LED CH 1 ON	X	X	X	X	X	0	X	X	
	BMPCH2	LED CH 2 ON	X	X	X	X	0	X	X	X	
	BMPCUE1	LED CUE 1 ON	X	X	X	0	X	X	X	X	
	BMPMIX	LED MIX ON	X	X	0	X	X	X	X	X	
	BMPCUE2	LED CUE 2 ON	X	0	X	X	X	X	X	X	
	BMPAUX	LED AUX 3 ON	0	X	X	X	X	X	X	X	

NOTE: COMMAND /MPSMUTE/ IS FED OVER DEDICATED LINE TO MP AMPLIFIER.
FOR MONITOR SPEAKER MUTING MODES SEE PAR. 1.1.

OPERATIONAL DESCRIPTION OF FADER START A..D

General note: In the description below the local and remote keyboards are mentioned. This concerns all keys on the tape deck and the transport keys on the remotes. All these keys may be disabled with the exceptions mentioned below.

When fader start is activated, all transport error modes, unload, power down and tape out commands are enabled, ensuring smooth tape handling in every case.

Only one fader type may be enabled. If an attempt is made to change the type from the keyboard or from one of the remotes, the new setting and function will be active and the old setting and function will be released.

The fader functions (FADER A..D) are independent on the remote settings NO REMOTE, REMOTE A or REMOTE B.

1. FADER START A

In this version, the recorder contains no "fader start ready" key.

As soon as the fader connectors FAD1/FAD2 are activated, the recorder is in PLAY mode and the local and remote keyboards are disabled with the exception of key EMPHASIS and the CURSOR keys. The tape deck monitor and the monitor panel are muted. The phone connector will still be active.

When the fader connectors FAD1/FAD2 are deactivated, STOP mode is initialized and the tape deck monitor and the monitor panel are demuted as soon as STOP is achieved (not before!). Otherwise normal operation is established.

Tape out/unload/td error/power down: FAD1/2 deactivated. When after tape out/unload/td error/power down the key PLAY is pressed and the fader connectors FAD1/2 are activated, the recorder establishes normal play mode (monitor panel demuted). When now the fader connectors FAD1/2 are deactivated, normal play mode continues. After the fader connectors FAD1/2 are activated again, normal fader operation is established as described in this paragraph.

RECORD mode: FAD1/2 connector is ignored.

TAPE DUMP A...D: FAD1/2 connector ignored.

2. FADER START B

In this version an internal and/or external "fader start ready" key is present.

When key "fader start ready" is not closed (signal SR-FADRY not present), any activation of the fader connectors FAD1/FAD2 is ignored. The local and remote keyboards remain activated, independent on the state of the fader connectors FAD1/FAD2. Normal operation.

When key "fader start ready" is closed (signal SR-FADRY present) and the fader connectors FAD1/FAD2 are activated, the recorder is in PLAY mode and the local and remote keyboards are disabled with the exception of key EMPHASIS and the CURSOR keys. The tape deck monitor and the monitor panel are muted. The phone connector will still be active.

When the fader connectors FAD1/FAD2 are deactivated, STOP mode is initialized and the tape deck monitor and the monitor panel are demuted as soon as STOP is achieved (not before!). Otherwise normal operation is established. The fader functions are enabled dependent on the state of the "fader start ready" key.

Tape out/unload/td error/power down: FAD1/2 deactivated. The "fader start ready" key is still active. When after tape out/unload/td error/power down the key PLAY is pressed and the fader connectors FAD1/2 are activated, the recorder establishes normal play mode (monitor panel demuted). When now the fader connectors FAD1/2 are deactivated, normal play mode continues. After the fader connectors FAD1/2 are activated again, the normal fader operation is established as described in this paragraph.

RECORD mode: FAD1/2 connector is ignored.

TAPE DUMP A...D: FAD1/2 connector ignored.

3. FADER START C

In this version an internal and/or external "fader start ready" key is present.

When key "fader start ready" is not closed (signal SR-FADRY not present), any activation of the fader connectors FAD1/FAD2 is ignored. The local and remote keyboards remain activated, independent on the state of the fader connectors FAD1/FAD2. Normal operation.

When key "fader start ready" is closed (signal SR-FADRY present), the local and remote keyboards are disabled, with the exception of key EMPHASIS, the CURSOR keys and the "fader start ready" key.

When key "fader start ready" is closed (signal SR-FADRY present) and the fader connectors FAD1/FAD2 are activated, the recorder is in PLAY mode and the local and remote keyboards remain disabled with the exception of key EMPHASIS and the CURSOR keys. The tape deck monitor and the monitor panel are muted. The phone connector will still be active.

When the fader connectors FAD1/FAD2 are deactivated, STOP mode is initialized and the tape deck monitor and the monitor panel are demuted as soon as STOP is achieved (not before!). The fader functions are enabled dependent on the state of the "fader start ready" key. Local and remote keyboards remain deactivated (except key EMPHASIS and the CURSOR keys) until key "fader start ready" is released.

Not before key "fader start ready" is disabled will the recorder establish normal operation again.

Tape out/unload/td error/power down: FAD1/2 deactivated. The "fader start ready" key is inactive. When after tape out/unload/td error/power down the key PLAY is pressed and the fader connectors FAD1/2 are activated, the recorder establishes normal play mode (monitor panel demuted). When now the fader connectors FAD1/2 are deactivated, normal play mode continues. After the fader connectors FAD1/2 are activated again, the normal fader operation is established as described in this paragraph.

RECORD mode: FAD1/2 connector is ignored.

TAPE DUMP A...D: impossible, when key "fader start ready" is active. The key "fader start ready" is ignored, when the recorder is in mode TAPE DUMP A...D.

4. FADER START D (Finland)

In this version an internal and/or external "fader start ready" key is present.

When key "fader start ready" is not closed (signal SR-FADRY not present), any activation of the fader connectors FAD1/FAD2 is ignored. The local and remote keyboards remain activated, independent on the state of the fader connectors FAD1/FAD2. Normal operation.

When key "fader start ready" is closed (signal SR-FADRY present), the local and remote keyboards remain enabled. All transport functions remain enabled (error modes!).

When key "fader start ready" is closed (signal SR-FADRY present) and the fader connectors FAD1/FAD2 are activated, the recorder is in PLAY mode and the local and remote keyboards remain enabled. The tape deck monitor and the monitor panel are muted. The phone connector will still be active.

To exit from this mode: press any transport key. All commands from the tape deck (tape out, errors, etc.) are enabled. Then the tape deck monitor and the monitor panel are demuted. When the fader connectors FAD1/FAD2 are deactivated, STOP mode is initialized and the tape deck monitor and the monitor panel are demuted as soon as STOP is achieved (not before!), unless any transport key or tape deck command has been activated before. The condition for demuting therefore is: any transport key pressed or STOP achieved. If any transport key or tape deck command has been activated before the FAD1/FAD2 signal is removed, the FAD1/FAD2 command is ignored. Normal operation is established.

Tape out/unload/td error/power down: FAD1/2 deactivated. The "fader start ready" key is still active. When after tape out/unload/td error/power down the key PLAY is pressed and the fader connectors FAD1/2 are activated, the recorder establishes normal play mode (monitor panel demuted). When now the fader connectors FAD1/2 are deactivated, normal play mode continues. After the fader connectors FAD1/2 are activated again, the normal fader operation is established as described in this paragraph.

RECORD mode: FAD1/2 connector is ignored.

TAPE DUMP A...D: FAD1/2 connector ignored.

DEVICE AND SUBDEVICE ADDRESSES FOR SYSCOM RECEIVERS AND TRANSMITTERS

FORMATTING SYSCON ADDRESSES:

1. NORMAL FORMAT

AAAA SSSI DDDDDDDD

A = DEVICE ADDRESS (0 IS NOT PERMITTED)
 S = SUBDEVICE ADDRESS
 D = DATA BYTE
 I = LO, IF TX; HI, IF RX (RELATED TO HARDWARE)
 * = SYSCON ADDRESS

2. DIGITAL GAINS (SEE PAGE 8)

AAAA SSSI GGGGGGGG
 AAAA TTTI DDDDDDDD

G = GAIN ADDRESS (SEE LIST GAINS CONTROL), ADDRESSES GAIN BLOCK
 T = (SUBDEVICE ADDRESS + 1)

DETECTOR 1.861.804.00

8BRECEX BYTE NO	8BTRMEX RECEIVER DEVICE ADDR	SUBDEV. ADDR	TRANSMITTER SUBDEV. ADDR	DESCRIPTION
1	0001	0001		SAFEAUX1...4, SAFECH1+2 MASSA
1	0001		0000	TDMON1...5, PRESENT
2	0001	0011		RECCUR
-	0001	0101		NOT USED
3	0001	0111		ELOOP1, TDSMUTE, LOSPD, HISPD

NOTE: RX ADDRESSES >7H ARE NOT PERMITTED DUE TO HARDWARE DESIGN!

NOTE: TX ADDRESS 0H ONLY DUE TO HARDWARE DESIGN!

ANALOG INPUT 1.861.752.00

2BRECEX BYTE NO	RECEIVER DEVICE ADDR	SUBDEV. ADDR	TRANSMITTER SUBDEV. ADDR	DESCRIPTION
1	0010	0001		ANAGAIN1
2	0010	0011		ANAGAIN2

ANALOG OUTPUT 1.861.751.00

2BRECEX BYTE NO	RECEIVER DEVICE ADDR	SUBDEV. ADDR	TRANSMITTER SUBDEV. ADDR	DESCRIPTION
1	0010	1101		ANAGAIN4
2	0010	1111		ANAGAIN3

DISPLAY PANEL 1.861.555.00

8BTRMEX BYTE NO	RX VIA PROM RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	0110		1100	KEYSTAT1
1	0011	0001		TIMEINF1
2	0110		1010	KEYSTAT2 , PRESENT
2	0011	0011		TIMEINF2
3	0011	0101		TIMEINF3
4	0011	0111		TIMEINF4
5	0011	1001		TIMEINF5
6	0100	0001		TIMEINF6
7	0100	0011		TIMEINF7
8	0100	0101		TIMEINF8
9	0100	0111		TIMEINF9
10	0100	1001		TIMEINF0
11	0100	1011		DPGAINL
12	0100	1101		DPGAINR
13	0110	0001		DPLVLCH1
14	0110	0011		DPLVLCH2
15	0110	0101		DPCLIPP1 , 2
16	0110	0111		QUALDISL
17	0110	1001		QUALDISR
18	0110	1011		BULBSTAT1
19	0110	1101		BULBSTAT2

GAINS CONTROL 1.861.853.00

8BTRMEX BYTE NO	8BRECEX RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	0101	0001		DDEMPH
1	0101		0000	DPLVLCH1
2	0101	0011		PREVIEW , ADCAES , EELOOP5 , HPFILOFF , REPMUTE1/2 , MAINMUTE , DAPROSYN
2	0101		0010	DPLVLCH2
3	0101	0101		DI SREPRO , EMPHASIS , PUNCH
3	0101		0100	DPCLIPP , PRESENT
4	0101	0111		DPGNADR(0 , 1 , 2 , 10 , 11 , 12)
4	0101		0110	QUALITY
5	0101	1001		DPDIGGN
5	0101		1000	DIEMPH

CODEC CONTROL 1.861.857.00

RECTRMEX (2BYTES) BYTE NO	RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	0111	0001		R/W/CRC ERRORS , REPRO , EELOOP3 , SQ-DISPLAY
1	0111		0000	SQ-DISPLAY DATA , CRC ERRORS

TIMING AND TEST 1.861.862.00

8BTRMEX BYTE NO	8BRECEX RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	1000	0001	0000	MCVASP1 EMPHASXF , PRESENT , TTERROR , FSSET , TTLOCK , RANGEOK
2	1000	0011		MCVASP2
3	1000	0101		MCCONW1
4	1000	0111		MCCONW2 , RECORD , EELOOP2 , EMPHASIS , RTSYNC , PAR/ INDI

RT/TC CODEC 1.861.861.00

8BTRMEX BYTE NO	8BRECEX RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	1001		1110	TXRTCRC
1	1001	0001		FLAG , SAMPFREQ , AUXTRKFO
2	1001		0000	RTADDR0
2	1001	0011		AUXTRKFO , RESERVED
3	1001		0010	RTADDR1
3	1001	0101		RTATOCO1
4	1001		0100	RTADDR2
4	1001	0111		RTATOCO2
5	1001		0110	RTADDR3
5	1001	1001		RTATOCO3
6	1001		1000	RTADDR4
6	1001	1011		RTATOCO4
7	1001		1010	RTADDR5
1	1011		0000	TCREADY
1	1011	0001		FRAMERA , VARILO , TAPETYPE , SYSCFS
2	1011		0010	TCADDR
3	1011		0100	PRESENT , TCREAD

PDM CONTROL 1.861.813.00

8BRECEX BYTE NO	8BTRMEX RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	1010	0001		MONSEL , CHASEL , MON/STE , EMPHASIS , AN/PDM
1	1010		0000	PRESENT
2	1010	0011		MPSMUTE , EEPDM , MPSMUTE
3	1010	0101		CUE1GAIN
4	1010	0111		CUE2GAIN
5	1010	1001		QUALDISL
6	1010	1011		NOT USED
7	1010	1101		QUALDISR

CHANNEL CONTROL PANEL 1.861.370.00

8BTRMEX BYTE NO	8BRECEX RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	1100	0001		BULSAFE , BULSAAUX , BULRDT , BULRDYTC , BULRYAUX
1	1100		0000	SAFECH , SAFETC , SAFEAUX , READYCH , READYTC , READYAUX
2	1100	0011		BULINPT , BULSYNC , BULREPRO
2	1100		0010	CHINPUT , CHSYNC , CHREPRO , PRESENT
3	1100	0101		BULTCIN , BULTCSYNC , BULTCREP , BULTCREC , BULAUXIN , BULAUXSY , BULAUXRP , BULAUXRC
3	1100		0100	TCINPUT , TCSYNC , TCREPRO , AUXINPUT , AUXSYNC , AUXREPRO

MONITOR PANEL 1.861.365.00

2BRECTRM BYTE NO	RECEIVER DEVICE ADDR	SUBDEV . ADDR	TRANSMITTER SUBDEV . ADDR	DESCRIPTION
1	1101	0001		BMPINP , BMPTAP , BMPCH , BMPCUE , BMPMIX , BMPAUX
1	1101		0000	KINTAP , KMPCH , KMPTC , KMPCUE , PRESENT

OVERVIEW OF DEVICE ADDRESS ASSIGNMENT:

0H	NOT PERMITTED
1H	DETECTOR (CAGE)
2H	ANALOG INPUT, ANALOG OUTPUT
3H	DISPLAY PANEL, RX BYTES 1...10 (TIMEINF)
4H	DISPLAY PANEL, RX BYTES 11, 12
5H	GAINS CONTROL
6H	DISPLAY PANEL, TX BYTES 1, 2; RX BYTES 13...19
7H	CODEC CONTROL
8H	TIMING + TEST
9H	RT (RT/TC CODEC)
AH	PDM CONTROL
BH	TC (RT/TC CODEC)
CH	CHANNEL CONTROL PANEL
DH	MONITOR PANEL
EH	REMOTE DISPLAY PANEL, TX BYTES 1, 2
FH	NOT USED

DEFINITION OF STANDARD DIAGNOSTIC SCREENS

SCREEN 1: SHOW STATUS SHOWS ALL AUDIO "TOGGLE" SWITCH STATUS INFO, SIGNAL QUALITY, TIME INFO, ERROR FLAGS

SCREEN 2: SHOW GAINS SHOWS ANALOG AND DIGITAL GAIN SETS (CALIBRATED, UNCALIBRATED, HEADROOM)

SCREEN 3: SHOW QUALITY SHOWS ACCUMULATED SIGNAL QUALITY INFO TOGETHER WITH LAP TIME, PLUS ACCUMULATED TRACK SELECTIVE CRC ERROR COUNTERS (DISPLAY OF ONE TRACK ONLY!).

SCREEN 4: SHOW REFERENCE TIME SHOWS ACTUAL REFERENCE TIME CONTROL WORD INFO AND BYTE 00 DI/DO INFO

RT INFO: xxxx xxxx xxxx xxxx (BINARY DATA)
 DI INFO: yyyy yyyy (BINARY DATA) DO INFO: zzzz zzzz (BINARY DATA)

TWIN FLAG : ON/OFF
 SAMPLING FREQUENCY : 48/44.1/32/44.056 kHz
 DASH FORMAT VERSION: S/M/F/X
 TC TRACK : MODULATED/UNMODULATED
 AUX3 TRACK : CUE/DATA
 CUE TRACK(S) : MODULATED/UNMODULATED

CANNEL STATUS DATA	DI	DO
USER APPLICATION	CONSUMER / PROFESSIONAL AUDIO / NON - AUDIO	CONSUMER / PROFESSIONAL AUDIO / NON - AUDIO
SAMPLING FREQUENCY	LOCKED / UNLOCKED	LOCKED / UNLOCKED
EMPHASIS TYPE	CD / CCITT / UNSPECIFIED	CD / CCITT / UNSPECIFIED
SAMPLING FREQUENCY	48 / 44.1 / 32 kHz / UNSPEC.	48 / 44.1 / 32 kHz / UNSPEC.

SCREEN 5: HELP SHOWS SYSCON COMMANDS ACCORDING TO THE SYSCON MONITOR LIST.

REMARK ON TERMINAL DISPLAYS WITH OPTIONAL FLOPPY:
 FORMATTING: 25 LINES, 80 CHARACTERS PER LINE.

DISPLAY TYPES :

USER DISPLAYS	SERVICE DISPLAYS (*)
UA) HELP MENU	SA) STATUS
UB) DIAGNOSTICS	SB) COMMANDS
UC) LEVELS	SC) DEBUGGING MODE

NOTE (*): ACCESS WITH PASSWORD ONLY

USER DISPLAYS:

- EXAMPLE:** B) DIAGNOSTIC DISPLAYS:
 PICTURE 1: CHECKLIST
- PRESENT BITS
 - COMMUNICATION TO MASTER
 - T+T-CHECK
 - RECORD CURRENT
 - TTLOCK
 - RANGEOK
 - AESLOCK
 - SAFE/READY STATUS
 - INPUT/REPRO
 - TEST
 - MAINMUTE, REPMUTE, CUEMUTE
 - FSSET

- VARISPEED + DEVIATION
- EXTERNAL SYNC MODE
- POWER SUPPLY SYNC
- SERVO REFERENCE
- AUDIO MONITOR MODE (CHASEL, MONSEL)
- TAPETYPE

PICTURE 2: EE-LOOPS WITH SQ-DISPLAY

- DISPLAY EE-LOOPS (0...5, INPUT) TOGETHER WITH SQ-DISPLAY
- CONVENIENT SETTING PROCEDURE FOR EE-LOOPS (0...5, INPUT, EETC, EEPDM, EERT)

PICTURE 3: ERROR CORRECTION

- APPLY WRITE ERRORS (CONVENIENT DISPLAY)
- DISPLAY ALL ERRORS

PICTURE 4: TAPE ERRORS

- DISPLAY SPLICE, INTERPOLATIONS, CRC, ETC.
- TOGETHER WITH TAPE TIME
- HISTOGRAM OF ERRORS (TO BE SELECTED) TOGETHER WITH TIME

RX FROM CODEC - ERROR DISPLAY:

RX	DISPLAY	CRC	INTERL .	TRK NO .
XF	LOW ERROR RATE CH 1			
FX	LOW ERROR RATE CH 2			
XE	FIRST PASS P CORRECTION CH 1			
EX	FIRST PASS P CORRECTION CH 2			
XD	SECND PASS P CORRECTION CH 1			
DX	SECND PASS P CORRECTION CH 2			
XC	INTERPOLATION CH 1			
CX	INTERPOLATION CH 2			
XB	SPLICE CH 1			
BX	SPLICE CH 2			
XA	TRACKLOSS CH 1			
AX	TRACKLOSS CH 2			
X9	MUTE CH 1			
9X	MUTE CH 2			

EXAMPLE: C) LEVELS

PICTURE 1: DISPLAY GAIN SETTINGS IN dB

PICTURE 2: PEAK DISPLAY (dB) AND CLIPPING DISPLAY

PICTURE 3: CLIPPING AND TIME

SERVICE DISPLAYS:**EXAMPLE:** B) COMMAND LIST

PICTURE 1: STATIC COMMANDS

PICTURE 2: DYNAMIC COMMANDS (LOSPD, HISPD, HISPDPDM)

4 Master Monitor

The Master monitor is part of the Master operating system. It is designed to enable a user to control the master section of the D820X digital tape recorder.

The INSTRUCTION SET listed below the monitor commands may be used to control the D820X via computer. It is a comprehensive set of commands including tape deck and audio commands. The optional Serial Interface RS-232 (Part-No. 20.820.432.00 is necessary for this application. Refer also to the ASCII command list in section 2.10.5 in volume 1 of the D820X manuals.

Connect a terminal (supported types below) or a personal computer to the DSub9 connector labeled "RS-232" at the rear panel of the tape transport. See par. 2.4.1.7 in vol. 1 of the D820X manuals for electrical interfacing. Par. 2.10.5 in the same manual describes the operation of the ASCII interface for the master monitor.

After power-up, the Master monitor displays the following message on a properly installed terminal or computer:

```
Welcome to the
D820X MASTER Monitor
Rel. ww/yy (C)PCM SoftTeam
STUDER AG CH-8105 Regensdorf
```

```
Monitor for ESPRIT Terminal
```

```
>_
```

The message "Monitor for ESPRIT Terminal" indicates that the system has been installed for an "ESPRIT" terminal. After the logon message, the prompt ">" and the cursor appears only if the command SYNCHRONIZER is set to off.

There is an alternative way to get the prompt message: after power-up synchronizer default setting is "on". No cursor appears. Type in "ECHO ON".

Commands:

Command format: > command {arg {arg {.. }}}

The command name is followed by a delimiter of space, comma, or carriage return. If there are no arguments, carriage return terminates the command; otherwise, a space or a comma separates the command from its argument. A space or comma separates arguments from each other. Some short commands (one character commands) require no carriage return and have no arguments.

Entering Commands:

Commands must be entered next to the prompt without a space. Upper or lowercase letters are allowed. The commands can be abbreviated. For example just type in DU<CR>, instead of DUMP<CR>. The Master monitor searches for the first string in the command table which matches the entered string and executes that command.

Misspelled commands can be corrected with "Back Space" and "Del". "ESC" deletes the command line.

The monitor displays an ERROR message when a command can not be found:

```
ERROR: command not found, use HELP
```

By typing the command "HELP<CR>" or just "H<CR>" all commands known to the system are listed. The listing can be interrupted and continued with the space bar or aborted with "ESC".

If the monitor detects a valid command with wrong or mistyped arguments, it displays an ERROR message and the syntax of the command. Then the command line will be displayed again with the cursor at the position of the wrong argument. This allows for quickly correcting arguments:

```
>SDG 1 I
ERROR: missing parameter

>SDG 1 I
      - cursor placed under wrong argument
```

A command is normally terminated if the prompt appears again without a preceding error message.

Most arguments can be entered just by their first letters. Arguments for addresses or data can be entered in the following forms:

```
hexadecimal: 1B (default)
decimal:     27.D
binary:     11011.B
label:     CLRSCR (see command LABEL)
```

Detailed Command Description:

General: Arguments in brackets {} are optional. Some commands display the actual status if no argument is given:

Example: >ECHO {Enter}
ECHO STATUS: ON
>_

Note: Use HELP to list all available commands.

Monitor Command List:

"@" (single stroke command)
Typing @ recalls the last entered command. The command can be executed with "carriage return" or modified as described in "Entering Commands".

"/" (single stroke command)
Displays data of last entered ROM/RAM memory address.

" " (single stroke command)
Displays data of incremented ROM/RAM memory address (see note below next par.).

"space bar" (single stroke command)
This command has two meanings:
1. Displays data of decremented ROM/RAM memory address (see note below).
2. (no single stroke command)
Typing "space bar" and "carriage return" displays the command list with syntax in the same way as the command "HELP".

Note: The two commands " " and "space bar" can be used solely after commands "/" and "MEMORY".

BREAKPOINT {-}{addr} This command allows to set break points for software debugging if the current program for test is resident in RAM. Without a parameter, all active break points are displayed. With "addr" a new break point can be specified. To remove a break point from a predefined address, type "-" before "addr".

Note: BREAKPOINT does not interrupt execution but displays the status of all CPU registers if the execution has passed a break point.

- CALL addr** It is used to execute a program or subroutine. The program or subroutine must end with an RTS opcode. Call a program subroutine by its absolute address or by its label if it is assigned in the label table (see command LABEL).
- COPY addr1 addr2 addr3** Copies an address block beginning at address 1 and ending at address 2 from address 3 up.
- DREALTIME {addr1} {addr2}** Dumps a block of memory in hex digits and ASCII characters repetitively. Press any character to hold/continue dump or "escape" to abort. Max. block length is 256 bytes. If no address is specified, the same memory block as before is dumped.
- DUMP {addr1} {addr2}** Dumps a block of memory in hex digits and ASCII characters. Press any character to hold/continue dump or "escape" to abort. If no addr is specified, the same memory block as before is dumped.
- DUMPMOTOROLA {addr1} {addr2} {addr3} {option}** Dumps a block of memory in Motorola format, with address 3 as the new start address of the memory block. If no address is specified, the same memory block as before is dumped.
Options:
- d <xx> = delay <xx> sec
 - h = output help list of dump command
 - n = output 32 <NUL> after each record
 - o <text> = output <text> & <CR>
 - w = wait for <EOT> after dump
- ECHO {on/off}** Echo character entered by keyboard on the screen.
- FILL addr1 addr2 data** Memorycells from address 1 to address 2 are filled with databyte(s). This command initializes a memory block.
- HELP** All commands are displayed with syntax. Press any character to hold/continue help or "escape" to abort. "space bar" may be used instead of HELP.
- LABEL** Displays a list of software labels with their addresses.
Note: addresses may be different for each version.
- LOADMOTOROLA {option}** Loads a block of memory in Motorola format.
Options:
- a = initializes addressbus, needed for piggiback μ P
 - b = echo all characters before loading begins (S0-record)
 - c <xxxx> = copy routine to RAM at addr <xxxx> and overwrite reset v.
 - d <xx> = start after <xx> seconds delay
 - e = echo all characters
 - h = output help list of load command
 - l = comment loading with S0 "loading.", S1".", S9 "terminated"
 - o <text> = output <text>
 - p = support auto write protection
 - s = start program after loading
 - w = wait after loading for ESC-character
- MEMORY {addr}** Displays or changes memory data. Press "space bar" to skip to the next databyte, " " to skip back to the previous databyte, "/" to repeat the same databyte or "escape" to end. With this command an earlier content of the memory cells can be viewed. When no address is specified, the identical memory block as before is displayed.

MREALTIME {addr} Displays memory data repetitively. Press any character to abort. If no address is specified, the same memory block as before is displayed.

SEARCH addr1 addr2 ascii_string

Searches for an ASCII string. Searching begins at address 1 and ends at address 2.

Example: >SEARCH 20 1FFF missing : search the word missing in memory 20 to 1FFF
searching..
string found at address 0636
>

START task stacksize Start a defined task. The task may be stopped by itself.

STAT {-r} Status information is displayed repetitively. For more information see list "DISPLAY OF STATUS" below.

STOP Stops the monitor task and displays the message: good bye... (for debugging use only).

TYPE Searches through ROM for terminal drivers. If it has found a driver, it displays the name of the driver on the display. A driver can be confirmed by entering "y". The command TYPE searches for another driver after typing "n". A few terminal drivers are listed below (see also TYPE).

Preinstalled terminal drivers:

ANSI	ANSI terminal (eg. IBM PC)
ASCII	dummy terminal (no special functions)
ESPRIT	Esprit by Hazeltine or by Esprit model 6110
HP	Hewlett Packard model 2392A
TVI905	TeleVideo 905 terminal

Instruction Set

Note: optional statements are denoted with { }, obligatory statements with < >

ABBREV.	INPUT	OUTPUT	DESCRIPTION
LCD	LCD { , : } CR	CR,LF	Local keyboard disabled
LCE	LCE { , : } CR	CR,LF	Local keyboard enabled
RMD	RMD { , : } CR	CR,LF	Remote keyboard disabled
RME	RME { , : } CR	CR,LF	Remote keyboard enabled
STP	STP { , : } CR	CR,LF	Function stop of tape deck
PLY	PLY { , : } CR	CR,LF	Function play of tape deck
FWD	FWD { , : } CR	CR,LF	Function forward of tape deck
WNF < >	WNF <xxxx> CR (0 <=xxxx<= 5FFF) 5FFFH=15.73 m/sec	CR,LF	Forward with selected speed (x{dec}/1563 = a m/sec) 1 m/sec = 061BH
RWD	RWD { , : } CR	CR,LF	Function rewind of tape deck
WNR < >	WNR <xxxx> CR (0 <=xxxx<= 5FFF) 5FFFH=15.73 m/sec	CR,LF	Rewind with selected speed (x{dec}/1563 = a m/sec) 1 m/sec = 061BH
EDI	EDI { , : } CR	CR,LF	Function edit of tape deck
REC	REC { , : } CR	CR,LF	Function record of tape deck
STM < >	STM <(-)hh{ , : }mm { , : }ss{ , : }xxx> CR with x=ms	CR,LF	Set timer at address < > with -10<hh<24, -1<mm<100, -1<ss<100, -1<xxx<1000 and -10hours < address < 24hours
TID	TID { , } CR	CR,LF	Display time in the LED displ.
WAD	WAD { , } CR	CR,LF	Display watch in the LED disp.
RTD	RTD { , } CR	CR,LF	Display rt in the LED display
TCD	TCD { , } CR	CR,LF	Display tc in the LED display
TM?	TM? { , : } CR	(-,h)h:m m:ss:xxx CR,LF	Timer ? show the value from the actual LED display indication
LOC < >	LOC <(-)hh{ , : }mm { , : }ss{ , : }xxx> CR with x=ms	CR,LF	Locate to address < > with -10<hh<24, -1<mm<100, -1<ss<100, -1<xxx<1000 and -10hours < address < 24hours
LMV < >	LMV <xxxxxxxx> CR with xx=1 byte	CR,LF	Wind to counter address < >
MV?	MV? { , : } CR	xx xx xx xx CR,LF	Show state of move roller counter with xx : 1 byte
REA (i)	REA (i) { , } CR i=1,2,3,4,F	CR,LF	Set channel i to ready 1,2 : CH1, CH2 3 : TC 4 : AUX (in AUX4MIX) F : all above
SAF (i)	SAF (i) { , } CR i=1,2,3,4,F	CR,LF	Set channel i to safe 1,2 : CH1, CH2 3 : TC 4 : AUX (in AUX4MIX) F : all above

ABBREV.	INPUT	OUTPUT	DESCRIPTION
INP (i)	INP (i) { , } CR i=1,2,3,4,F	CR,LF	Set channel i to input 1,2 : CH1, CH2 3 : TC 4 : AUX (in AUX4MIX) F : all above
REP (i)	REP (i) { , } CR i=1,2,3,4,F	CR,LF	Set channel i to repro 1,2 : CH1, CH2 3 : TC 4 : AUX (in AUX4MIX) F : all above
RTN	RTN { , : } CR	CR,LF	Rt sync enabled
RTF	RTF { , : } CR	CR,LF	Rt sync disabled
SBA < >	SBA <xxxx> CR	CR,LF	Set ES bus address (two lower bytes min is 80H and two higher bytes min is 82H)
BA?	BA? { , : } CR	xxxx CR,LF	Show ES bus address
MSN	MSN { , } CR	CR,LF	Master safe enabled
MSF	MSF { , } CR	CR,LF	Master safe disabled
SAP < >	SAP <i,j,x.y> CR with i=1,2 j=O,I -0.1<x.y<20.1	CR,LF	Set analog levels (line level j / i: x.y dBm) (O: output, I: input)
SPF < >	SPF <x> { , } CR x=0,4,6,8,10,15, 20 dBm	CR,LF	Set analog levels fixed (line level x dBm for all channels)
SD0	SD0 { , } CR	CR,LF	Set digital gain 0 dB for all channels
SDG < >	SDG <i,j,(-)x.y> CR with i=1,2 j=O,I and -10.1<x.y<6.1	CR,LF	Set digital gain j / i: x.y dB (O: output, I: input)
CUL < >	CUL <i,x.y> CR with i=1,2 -0.1<x.y<20.1	CR,LF	Set cue level(s) channel i i: 1,2 ; x.y dBm
GA? < >	GA? <i,j> CR with j=ia,oa, id,od,cu and i=1,2	xx CR,LF	Gain ? ia = input analog oa = output analog id = input digital od = output digital cu = cue
SAI <j>	SAI <j> { , } CR with j=m,a	CR,LF	Set autoinput j m = mute a = auto
AMU <j>	AMU <j> { , } CR with j=y,n	CR,LF	Automute yes or no
MAN	MAN { , } CR	CR,LF	Mute both main channels (soft mute), CH1, CH2
MAF	MAF { , } CR	CR,LF	Demute both main channels (soft demute), CH1, CH2
AED <j>	AED <j> { , } CR with j=y,n	CR,LF	Autoedit yes or no
DAI <j>	DAI <j> { , } CR with j=a,d	CR,LF	Set digital or analog input

ABBREV.	INPUT	OUTPUT	DESCRIPTION
EMP <j>	EMP <j> { , } CR with j=y,n	CR,LF	Emphasis yes or no
SSR <p>	SSR <p> { , } CR with p=hi,lo	CR,LF	Set sampling rate to p rate; HI, LO as configured on D820X
AA4 <p>	AA4 <p> { , } CR with p=mix,cue	CR,LF	Assign aux4 to mix or cue
RCU <j>	RCU <j> { , } CR with j=ana,auto	CR,LF	Reproduce cue track(s) ana = repro of bias recordings auto= according to flag on rt
HPF <j>	HPF <j> { , } CR with j=y,n	CR,LF	High pass filter on yes or no
IPC <p>	IPC <p> { , } CR with p=int,ext, bal,unbal	CR,LF	Sync input intern,extern,balanced or unbalanced (composite video)
OPC <p>	OPC <p> { , } CR with p=sec,wor	CR,LF	Output clock sector or word
IPT <p>	IPT <p> { , } CR with p=vid_ebu, ntsc_bw, ntsc_col, syn, wcl	CR,LF	Input video ebu, video ntsc bw, video ntsc col, synchronizer or word clock
SRH	SRH { , } CR	CR,LF	Rehearsal mode enabled (EE2) Stereo operation only
CRH	CRH { , } CR	CR,LF	Rehearsal mode disabled (EE2) Stereo operation only
EED	EED { , } CR	CR, LF	Any connected EE loop disabled
EEL	EEL { , } CR	CR, LF	EE loop 1 (left) enabled
EER	EER { , } CR	CR, LF	EE loop 1 (right) enabled
EE1	EE1 { , } CR	CR, LF	EE loop 1 enabled (both CH)
VDM <p>	VDM <p> { , } CR with p=%,ips,ht	CR,LF	Set varispeed display mode %, inch per second or half tone
VEN	VEN { , } CR	CR,LF	Varispeed enabled
VEF	VEF { , } CR	CR,LF	Varispeed disabled
SVS < >	SVS <(-)x.y> CR with -12.6<x.y<12.6	CR,LF	Set varispeed x.y %
LFT	LFT { , } CR	CR,LF	Lifter enabled
EDT	EDT { , } CR	CR,LF	Lifter disabled
FEN	FEN { , } CR	CR,LF	Fader start ready key enabled
FEF	FEF { , } CR	CR,LF	Fader start ready key disabled
ROL <p>	ROL <p> CR with p=s,p,r	CR,LF	Set rollback stop, play or record
FRA <p>	FRA <p> { , } CR with p=25,29.97, 30	CR,LF	Set time code delay to p frames per second
DIS <p>	DIS <p> { , } CR with p=co,usr, una	CR,LF	Select display of code, user bits or unassigned bits
ST?	ST? { , } CR	xx CR,LF	Status equates ? see list of STATUS EQUATES

ABBREV.	INPUT	OUTPUT	DESCRIPTION
MS?	MS? { , } CR	xx CR,LF	Messages from syscon 76543210 <ul style="list-style-type: none"> → VCXO locked, TTLOCK → PLL locked, RANGEOK → digital input lock.
SO?	SO? <x> { , } CR	xx CR,LF	Display of status. For x see POSITION in list DISPLAY OF STATUS.
DST	DST { , } CR	(-,h)h:m m:ss:xxx yy CR,LF	Display of status. Time and tape deck status yy acc. to list STATUS EQUATES x= msec and yy = byte "CODE" (escape with CTRL X or ESC)
STAT	STAT {-r , } CR with -r = repeat	STATUS CR,LF	Display of status, according to table DISPLAY OF STATUS.
SON	SON { , : } CR	CR, LF	Synchronizer enabled
SOF	SOF { , : } CR	CR, LF	Synchronizer disabled
TDN	TDN { , } CR	CR, LF	Time code delay on
TDF	TDF { , } CR	CR, LF	Time code delay off
APE	APE { , } CR	CR, LF	Append mode enabled
APD	APD { , } CR	CR, LF	Append mode disabled
LWD	LWD { , } CR	CR, LF	Library wind disabled
LWE	LWE { , } CR	CR, LF	Library wind enabled
SMS < >	SMS <x.y> CR with 0.1<x.y<15.0	CR, LF	set max. wind speed
SWS < >	SWS <x.y> CR with 0.1<x.y<15.0	CR, LF	set library wind speed
MV?	MV? { , } CR	CR, LF	Move roller counter ? 4 byte, hex display

Display of Status

To escape from status display mode press ESC; to stop or start in repetitive mode press any other key

POSITION	BYTE	DESCRIPTION
1	1	Status of local keyboard 76543210 └───┬───> 0: enabled, 1: disabled
2	1	Status of remote keyboard 76543210 └───┬───> 0: enabled, 1: disabled
3	1	Status of master clock configuration 76543210 └───┬───┬───┬───┬───┬───┬───┬───> output sync 0: sector, 1: word └───┬───┬───┬───┬───┬───┬───┬───> ext. ref. input 0: balanced └───┬───┬───┬───┬───┬───┬───┬───> 1: unbalanced 000 ───> ext. ref. video ebu 001 ───> ext. ref. video ntsc bw 010 ───> ext. ref. digital input (bal only) 011 ───> ext. ref. synchronizer 100 ───> not used 101 ───> ext. ref. word sync. 110 ───> ext. ref. video ntsc col └───┬───> input 0: extern, 1: intern
4	1	Status of sampling frequency 76543210 └───┬───┬───┬───┬───┬───┬───┬───> 0: not defined └───┬───┬───┬───┬───┬───┬───┬───> 1: 48 kHz └───┬───┬───┬───┬───┬───┬───┬───> 2: 44.1 kHz └───┬───┬───┬───┬───┬───┬───┬───> 3: 32 kHz └───┬───┬───┬───┬───┬───┬───┬───> 4: 44.056 kHz └───┬───┬───┬───┬───┬───┬───┬───> 1: lower sampling rate (LO) └───┬───┬───┬───┬───┬───┬───┬───> 2: higher sampling rate (HI)
5	1	Status of actual display 0: timer 1: watch or lap 2: time code 3: reference time
6	1	Status of safe/ready 76543210 (0: ready, 1: safe) └───┬───┬───┬───┬───┬───┬───┬───> channel 1 └───┬───┬───┬───┬───┬───┬───┬───> channel 2 └───┬───┬───┬───┬───┬───┬───┬───> aux 1 (TC) └───┬───┬───┬───┬───┬───┬───┬───> aux 2 (RT) └───┬───┬───┬───┬───┬───┬───┬───> aux 3 (ch2/aux) └───┬───┬───┬───┬───┬───┬───┬───> aux 4 (ch1/mix) └───┬───┬───┬───┬───┬───┬───┬───> master
7	1	Status of repro/input 76543210 (0: repro, 1: input) └───┬───┬───┬───┬───┬───┬───┬───> channel 1 └───┬───┬───┬───┬───┬───┬───┬───> channel 2 └───┬───┬───┬───┬───┬───┬───┬───> aux 1 (TC) └───┬───┬───┬───┬───┬───┬───┬───> aux 3 (AUX)
8	1	Status of actual tape type 0: tape A 1: tape B
9	1	Status of fader 76543210 └───┬───┬───┬───┬───┬───┬───┬───> 00 → fader A └───┬───┬───┬───┬───┬───┬───┬───> 01 → fader B └───┬───┬───┬───┬───┬───┬───┬───> 10 → fader C └───┬───┬───┬───┬───┬───┬───┬───> 11 → fader B └───┬───┬───┬───┬───┬───┬───┬───> fader prepared └───┬───┬───┬───┬───┬───┬───┬───> fader active

POSITION	BYTE	DESCRIPTION
10	1	Status of autoinput 76543210 <ul style="list-style-type: none"> → autoinput A → autoinput B → 0: automute, 1: autoinput according bit 0 & 1
11	2	Status of toggle keys Base + 0 76543210 <ul style="list-style-type: none"> → autoedit 0: off, 1: on → automute 0: off, 1: on → rehearse 0: off, 1: on → not used → level display permanent 0: norm 1: input → varispeed 0: off, 1: on → ignore di c word 0: off, 1: on → channel control parallel 0: off 1: on Base + 1 76543210 <ul style="list-style-type: none"> → not used → high pas filter 0: off, 1: on → not used → play cue 0: analog 1: automatic → input 0: digital, 1: analog → not used → emphasis 0: off, 1: on → quality display 0: off, 1: on
12	4	Status of constant relative tape time {HEX}
13	1	Status of lifter 76543210 <ul style="list-style-type: none"> → 0: normal control from tape mpu → 1: lifter disabled → 1: lifter enabled
14	1	Status of locator 00H : no locator 01H : locator 1 02H : locator 2 03H : locator 3 04H : locator 4 05H : locator 5 06H : last play / stop position 07H : last play / play position 08H : last play / record position 09H : reserved 0AH : set timer 0BH : set address 0CH : rollback / stop time 0DH : rollback / play time 0EH : rollback / record time 0FH : zero
15	1	Status of varispeed display 76543210 <ul style="list-style-type: none"> 00 → inch per second 01 → half tone 10 → % → indicator enhanced
16	1	Status of varispeed selection 00H : -12.5 % 7DH : 0 % → step = 0.1 % (01H) FAH : 12.5 % /
17	4	Status of error handling Base + 0 : error definition Base + 1 : error number Base + 2 : Base + 3 : → address of error definition

Status Equates

CODE	DESCRIPTION
01H	TAPE OUT NOT ACHIEVED
81H	TAPE OUT ACHIEVED
02H	STOP NOT ACHIEVED
82H	STOP ACHIEVED
03H	REWIND NOT ACHIEVED
83H	REWIND ACHIEVED
04H	FORWARD NOT ACHIEVED
84H	FORWARD ACHIEVED
05H	NOT USED
85H	NOT USED
06H	NOT USED
86H	NOT USED
07H	PLAY INTERNAL REFERENCE NOT ACHIEVED
87H	PLAY INTERNAL REFERENCE ACHIEVED
08H	NOT USED
88H	NOT USED
09H	RECORD NOT ACHIEVED
89H	RECORD ACHIEVED
0AH	NOT USED
8AH	NOT USED
0BH	EDIT NOT ACHIEVED
8BH	EDIT ACHIEVED
40H	SHUTTLE BACKWARD NOT ACHIEVED
0C0H	SHUTTLE BACKWARD ACHIEVED
41H	SHUTTLE FORWARD NOT ACHIEVED
0C1H	SHUTTLE FORWARD ACHIEVED
42H	LOCATE WIND BACKWARD NOT ACHIEVED
0C2H	LOCATE WIND BACKWARD ACHIEVED
43H	LOCATE WIND FORWARD NOT ACHIEVED
0C3H	LOCATE WIND FORWARD ACHIEVED
07H	LOCATE PLAY BACKWARD NOT ACHIEVED (*)
07H	LOCATE PLAY BACKWARD ACHIEVED (*)
07H	LOCATE PLAY FORWARD NOT ACHIEVED (*)
07H	LOCATE PLAY FORWARD ACHIEVED (*)
46H	CUEING BACKWARD NOT ACHIEVED
0C6H	CUEING BACKWARD ACHIEVED

CODE	DESCRIPTION
47H	CUEING FORWARD NOT ACHIEVED
0C7H	CUEING FORWARD ACHIEVED
48H	NOT USED
0C8H	NOT USED
49H	NOT USED
0C9H	NOT USED
4AH	NOT USED
0CAH	NOT USED
4BH	NOT USED
0CBH	NOT USED
59H	TAPE DUMP NOT ACHIEVED
0D9H	TAPE DUMP ACHIEVED
5AH	CUT WITH DISTANCE NOT ACHIEVED
0DAH	CUT WITH DISTANCE ACHIEVED
0DDH	BURN- IN TEST ACHIEVED

(*) Composite command/status message. the last transmitted command is indicated. 07h (play internal reference) is indicated after termination of locate play backward or forward.

Examples:

- >FWD = fast forward
- >STP = stop
- >LOC_-01_43_00_800 = locate to address - 1.43.00.800
- >SAF_3/ = time code channel SAFE (recording inhibited)
- >GA?_1_0A* = request for analog output gain value, channel 1: answer of the recorder e.g. A9 HEX
- >SAP_1_O_8.3* = set analog output level channel 1 to 8.3 dBV.7; the old value will be overwritten
- >DU_24C_267 = All tape tension parameters are displayed on the terminal in hexadecimal format, e.g.

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	
0240	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	xx	00	83	87	82
0250	00	00	E5	EC	00	00	00	00	01	2D	82	00	00	00	00	00
0260	3C	F0	80	00	09	90	00	00	xx	xx	xx	xx	xx	xx	xx	xx	<.....
0270
.....
.....

The address of a parameter can be computed by adding an offset which is tabulated in a separate list to the start address.

For start address see section MASTER MONITOR, command "LABEL" in volume III of the D820X manual.

For offset address see section MASTER MONITOR, command "PARAMETER" in volume III of the D820X manual.

Table of Contents Section 5: Signal Wire List

5.1 Assemblies and Groups	2
5.2 Elements and Points	2
5.3 Main Connection Types	3
5.4 Wire Labeling, Color Scheme	4
5.5 Explanations to LOCATION PIN LIST	5
5.6 Explanations to SIGNAL WIRE LIST	6

5 Signal Wire List

In order to follow a signal in the recorder, four different references are at disposal:

- the circuit diagram
- the signal name description
- the location pin list
- the signal wire list.

The circuit diagram is needed to locate the signal at the in- and/or output(s) of a board, because after processing the signal is named differently. In the signal name description list, the source and sink of a specific signal is tabulated together with a brief explanation. The most important lists, however, are the location pin list, found at top of the wiring list and the signal wire list at the end. The recorder has been split into assemblies (ASY), groups (GRP) and elements (ELM) and at least these names should be known to gain access to a certain connector and connecting point (PNT) and to understand the wiring list.

The location pin list is used only when assembly, group and element names are known. The assembly names are given at the begin of each volume of the D820X documentation. Drawings with the group and element names can be found in chapter 4, drawings INTERCONNECTION and CONNECTOR LOCATION of the third volume before the wiring list.

The access to the signal wire list is the signal name itself. When this is known, its distribution is tabulated in the signal wire list again by means of assembly, group, element and pin designations. No reference is made whether a signal is sourced or sinked at a specific pin. This information is present in the circuit diagram only.

The signals are referred to by names maximum 8 characters long and have been constructed from various abbreviations, in the digitalaudio section namely starting with

AD referring to analog input
ANA referring to analog signals
AUX referring to cue tracks
CBUS referring to sysbus interconnections
CC referring to interconnections codec control/codec memory
CLK referring to timing lines
DA referring to analog output
DC referring to signals between codec and dapro
DD referring to dapro internal interconnections
DP referring to display panel
I designates an inverse (active low) signal
PB referring to playback signals
PD referring to cue (pdm)/cue/dapro interconnections
RT referring to reference track
SSDA referring to the ssda interconnections (processors)
TC referring to time code
TT referring to connections from/to timing and test
WR referring to write signals

An I after this first block of abbreviations stands for a following inverse (active low) signal. The signal names have been chosen to be as self-explanatory as possible.

5.1 Assemblies and Groups

The electrical hardware of the D820X is subdivided into assemblies (ASY) and groups (GRP). These are interconnected in various forms (see par. 4.3) and the cables are identified (normally at both ends) with a corresponding assembly and group number. The assembly and group arrangements and the main interconnections are listed in the survey of assemblies and groups, par. 4, drawings INTERCONNECTION and CONNECTOR LOCATION.

5.2 Elements and Points

Groups are subdivided into elements (ELM) on which the connecting points (PNT) are located.

5.3 Main Connection Types

Typ	Description	STUDER No.
	Connector, D-type, crimp:	
A	Contact pin, for thin stranded wire	54.02.0451
AA	Contact pin, for heavy stranded wire	54.02.0455
B	Contact socket, for thin stranded wire	54.02.0450
BB	Contact socket, for heavy stranded wire	54.02.0454
	CIS connector:	
C	Contact socket	54.01.0402
D	Contact pin	54.01.0401
	MOLEX connector	
F	Contact socket, for thin stranded wire	54.02.0412
FF	Contact socket, for heavy stranded wire	54.02.0413
G	Solder hook	29.21.6002
H	Wire/stranded wire, tinned (6 mm)	--.---.-----
I	Connector, D-type, crimp, contact pin	54.02.1112
	Flat connector, AMP FASTON, crimp, 0.8 x 6.3 mm:	
JM	Contact, female, for thin stranded wire	54.02.0337
J	Contact, female, for heavy stranded wire	54.02.0332
JJ	Contact, fem., for very heavy stranded w.	54.02.0338
K	Wire/stranded wire, stripped 8 mm, tinned 1 mm	--.---.-----
L	Wire/stranded wire, tinned 4 mm	--.---.-----
M	MOLEX contact pin, for thin stranded wire	54.02.0411
MM	MOLEX contact pin, for heavy stranded w.	54.02.0410
MY	AMP flat connector (blade)	54.02.0344
N	CIS connector, contact pin	54.01.0225
O	Contact spring to EURO card conn. strip	54.01.0376
	PCB contact strip:	
P	Contact strip, for thin stranded wire	54.06.4512
PP	Contact strip, for heavy stranded wire	54.06.4510
Q	Socket strip, contact socket	54.01.0451
R	Connector, D-type, crimp, contact socket	54.02.1111
S	Wire/stranded wire, stripped 4 mm/tinned	--.---.-----
T	TERMI-POINT connector on WIRE WRAP post	--.---.-----
U	Detent-spring solder contact, crimp	54.03.0201
UU	Detent-spring solder contact, crimp	54.34.6002
V	Contact, female, for heavy stranded wire	54.02.0432
VV	Contact, female, for thin stranded wire	54.02.0474
W	Wrapped	--.---.-----
	Flat connector AMP FASTON, crimp, 0.5 x 2.8 mm:	
X	Contact, female, for thin stranded wire	54.02.0325
XX	Contact, female, for heavy stranded wire	54.02.0329
	Flat connector AMP FASTON, crimp, 0.8 x 2.8 mm:	
Y	Contact, female, for thin stranded wire	54.02.0326
YY	Contact, female, for heavy stranded wire	54.02.0327
Z	Not tinned	--.---.-----

5.4 Wire Labeling, Color Scheme

Three numbers can be found on the end of each important wire: these specify the corresponding group, the element, and the connecting point.

The flat cable connectors carry labels at both ends indicating:

- Number of assembly, group and element where the connector itself is to be inserted.
- Either the name of the assembly and group where the connector at the opposite end of the cable is to be connected (the assembly name is stated only, when the other end is located on a different assembly),

or

The name of the group where the connector itself is to be inserted.

The labels attached to the ribbon cables also carry a short text, describing the element.

Examples:

- CAPSTAN MOTOR DRIVE AMPLIFIER, GRP39, MOLEX socket ELM03. Wire colors at the matching connector (GRP20, ELM71) yel and red, wires printed 20-71-1 and 20-71-6. That means that the red wire is connected to pin No. 6 of the MOLEX connector.

The other end of the red wire is marked 20-62-6, i.e. it is connected to the point No. 6 of the wire field ELM62 on group BASIS PCB TAPE DECK, GRP20.

- The flat cable connector plugged to BASIS PCB TAPE DECK GRP20 ELM14 (connection to the FUSE/SUPPLY FAILURE DETECTOR PCB) is labeled as follows:

GR.20	EL.14
TO FUSE/SUPP	
FAILURE DET.	

The connector at the other end of the flat cable is marked with the following tag:

GR.59	EL.01
FUSE/SUPPLY	
FAILURE DET.	

Color scheme

0	black	(blk)
1	brown	(brn)
2	red	(red)
3	orange	(org)
4	yellow	(yel)
5	green	(grn)
6	blue	(blu)
7	violet	(vio)
8	grey	(gry)
9	white	(wht)
-	uncolored	(unc)

5.6
Explanations to SIGNAL WIRE LIST

This list is arranged in alphabetic order by signal name (the signal names of the neutrals and the supply voltages are located at the top of the list). If the signal name is known, further information can be obtained by consulting this list. If only the group designation or the group number are known, consult the LOCATION PIN LIST (refer to 4.5).

The signal names are listed in the first column (SIGNAL NAME). The wire color can be found in the second column (COLOR). The fourth column specifies groups, elements, and connecting points on which the signal concerned is available (GRP ELM PNT). This column is arranged in numerical order by group number, *it does not give any information on the way of the signal through the recorder.*

Example (refer to SIGNAL WIRE LIST page 92)

```
*****
* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 92 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
```

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
+ 5V			11	38	1	9			F	FROM GRP39. ELM02	J01	
			11	39	2	9			M	TO GRP38. ELM01	P02	
+CAPMOT	2		1	79	1	24				POWER CONNECTOR (24 PIN MOLEX FEM)		
	2		1	79	2	24				POWER CONNECTOR (24 PIN MOLEX MALE)		
	2		11	11	3	3			L	RECTIFIER	DZ03	70.01.0231
	2		11	12	4	1			L	CAPACITOR	C04	59.26.7103
	2		11	12	5	7			M	CONNECTOR TO GRP32. ELM01	P01	
	2		11	19	1	24			F	FROM GRP32. ELM02	J01	
	2		11	19	2	24			M	TO GRP21. ELM02	P01	
			11	20	14	1				FUSE FAILURE DETECTOR	P14	
			11	20	14	2				FUSE FAILURE DETECTOR	P14	
	2		11	20	62	6			L	WIRE FIELD		
	2		11	20	62	7			L	WIRE FIELD		
	2		11	20	70	24			F	FROM GRP21. ELM01	J13	
	2		11	20	71	6			F	TO CAPSTAN MOTOR DRIVE AMP.		
			11	32	1	7			F	INPUT FROM GRP12. ELM05	J01	
			11	32	2	24			M	OUTPUT	P01	
			11	39	3	6			M	FROM GRP20. ELM71	P03	
			11	59	1	1				FROM GRP20. ELM14	P01	
			11	59	1	2				FROM GRP20. ELM14	P01	

- Signal name:** +CAPMOT
- Color:** 2 (red) or none (flat cable)
- Connection type:** M (MOLEX contact pin for thin stranded wire), or
F (MOLEX contact socket for thin stranded wire), or
L (soldered directly to a PCB)

Part of the signal path:

GRP	ELM	PNT	
11	03	03	Rectifier bridge, "+" connection point, soldered. From here, a red wire leads to the
12	04	01	Smoothing capacitor, "+" connection point, soldered. In addition, a
12	05	07	Wire harness with MOLEX connector leads on to the
32	01	07	MOLEX socket on the SWITCHING STABILIZER. The signal is looped through to the
32	02	24	MOLEX plug on the SWITCHING STABILIZER, there the
19	01	24	Wire harness with MOLEX socket is inserted.
19	02	24	MOLEX plug at the other end of the wire harness is connected to
21	02	24	MOLEX socket on the BASIS PCB AUDIO. Here, the signal is looped through to the
21	01	24	MOLEX plug on the BASIS PCB AUDIO, where the
20	70	24	Wire harness with MOLEX socket is plugged in. The other end of the wire harness is soldered to the
20	62	06	Wire field on the BASIS PCB TAPE DECK, the signal is looped through to the
*20	62	07	Wire field on the BASIS PCB TAPE DECK. At the other end of the wire harness that is soldered here to the PCB there is a
20	71	06	MOLEX socket, plugged to the
39	03	06	MOLEX socket on the CAPSTAN MOTOR DRIVE AMPLIFIER

* Here the signal is branched out. This is shown by the group number appearing more than two times in the SIGNAL WIRE LIST.

```

*****
*          *          *          *          *          *          *          *          *
*          *          *          *          *          *          *          *          *
*          *          *          *          *          *          *          *          *
*          *          *          *          *          *          *          *          *
*          *          *          *          *          *          *          *          *
*          *          *          *          *          *          *          *          *
*****
    
```

```

*****
* PART NUMBER: 1.861.022.00 * D E 2 0 X P C M R E C R D E R * INDFX: 00 *
*****
    
```

PAGE 1 OF 194

S U M M A R Y

```

ASSEMBLYS      5
GRUUPS         69
ELEMENTS       257
PINS (TOTAL)   6360 ( UNUSED PINS 1427 )
MULTIPLE PINS  1
CODING KEYS    15
SIGNALS        1081 ( UNUSED SIGNALS 121 )
RECORDS READ   6711
    
```

DATE OF ORIGIN: 86/08/27
DATE OF PROC.: 86/12/08

GROUP NODE = *
INTER GRUUP NODE = #
DIRFCT WIRE TO = <
WIRING NOT COMPUTED = 2

OPTIONS SPECIFIED : LOCLIS, SIGLIS, ALLCOL, WIRALL

OPTIONS USED : LOCLIS, SIGLIS, ALLCOL, WIRALL

LISTINGS GENERATED :	PAGE	ERR	WRN
GROUP SUMMARY	2	C	0
LOCATIUN PIN LIST	4	C	1
SIGNAL WIRE LIST	86	C	0

====>> NO PUNCH GENERATED <<=====

```

*****
* WILLI STUDER AG * G R O U P S U M M A R Y * 86/12/08 * 10:54 * PAGE 2 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
    
```

ASY	GRP	PART NUMBER	DESCRIPTION	UNUSED PINS	USED PINS	TOT. PINS	MULT. PINS	COD. KFYS	TOT. ELM	RFM
1	70	1.861.731.00	SIGNAL QUALITY DISPLAY	0	26	26	0	0	1	
1	73	1.861.583.00	INTERCONNECTION BOX	2	73	75	0	0	3	
1	74	1.861.582.00	EXTERNAL PANEL CONNECTOR	3	22	25	0	0	1	
1	76	1.861.586.00	CUE INPUT/OUTPUT	0	18	18	0	1	4	
1	79	1.861.726.00	POWER SUPPLY (DELTA-MOLEX PRINT)	0	98	98	0	0	4	
1	80	1.861.890.00	BACKPANEL RACK	551	565	1116	0	0	19	
2	1	1.861.895.00	BACKPANEL CAGE	197	262	459	0	0	7	
2	2	1.861.803.00	HEADBLOCK CONNECTOR WRITE	2	24	26	0	0	1	
2	3	1.861.801.00	HEADBLOCK CONNECTOR REAC	0	25	25	0	0	1	
2	4	1.861.802.00	TAPE DECK MONITOR CONNECTORS	1	8	9	0	0	2	
2	5	71.01.0108	INTERNAL SPEAKER	0	2	2	0	C	1	
2	6	54.24.0102	INTERNAL PHONE PLUG	2	4	6	0	0	1	
3	1	1.861.742.00	DISPLAY PANEL PROCESSOR (DP PRCC)	5	46	51	0	0	2	
3	2	1.861.744.00	CHANNEL CONTROL PANEL TRANSCIEVER	10	76	86	0	C	4	
3	3	1.861.746.00	MONITOR PANEL AMPLIFIER (MP AMP)	7	64	71	1	0	6	
3	4	71.01.0108	SPEAKER RIGHT	0	2	2	0	0	1	
3	5	71.01.0108	SPEAKER LEFT	0	2	2	0	0	1	
3	6	54.24.0102	PHONES PLUG	0	4	4	0	0	1	
3	7	1.912.001.00	TANDEM POTENTIOMETER	0	6	6	0	0	1	
3	8	1.861.745.00	MONITOR PANEL KEYBOARD (MP KYB)	7	18	25	0	0	1	
3	9	1.861.741.00	DISPLAY PANEL KEYBOARD (DP KYB)	2	24	26	0	0	1	
3	10	1.861.743.00	CHANNEL CONTROL PANEL KEYBOARD	4	32	36	0	0	2	
4	1	1.861.885.00	BACKPANEL BCX	362	1376	1738	0	0	26	
4	2	1.861.775.00	ANALOG I/O	2	24	26	0	0	6	
4	3		DI/DO/TC/RT/CLOCK/TEST/BNC	44	61	105	0	0	15	
5	1	1.116.861.20	READ HEAD	0	24	24	0	0	1	
5	2	1.116.861.10	WRITE HEAD	2	24	26	0	0	1	
5	3	1.861.805.00	HEAD PREAMPLIFIER	0	49	49	0	0	3	
11	1	54.04.0111	POWER INPUT	0	3	3	0	0	1	
11	2		EARTH CONNECTORS	0	3	3	0	0	3	
11	3	55.12.0001	POWER SWITCH	0	4	4	0	0	1	
11	4	1.180.337.00	LINE FILTER	6	15	21	0	0	1	
11	5		FUSES (LINE)	0	4	4	0	0	2	
11	6		DISTRIBUTOR	8	24	32	0	0	1	
11	7		VOLTAGE SELECTOR	0	12	12	0	0	3	
11	8	1.820.520.00	MAIN TRANSFORMER (SPOOLING MOTCRS)	0	44	44	0	0	5	
11	9	1.820.520.00	MAIN TRANSFORMER	0	32	32	0	0	4	
11	10		FUSES (SECONDARY)	0	6	6	0	0	3	
11	11		RECTIFIERS	4	32	36	0	0	5	
11	12		CAPACITORS	2	18	20	0	0	3	
11	18	1.820.592.00	SUPPLY CABLE, SPOOLING MOTORS	12	36	48	0	0	2	
11	19	1.820.591.00	SUPPLY CABLE, ELECTRONICS	0	48	48	0	0	3	
11	20	1.820.701.00	BACKPANEL TAPE DECK	113	961	1074	0	0	44	
11	25		REMOTE CONTROL PANEL	2	72	74	0	0	5	
11	26	1.820.729.00	SERIAL REMOTE INTERFACE	3	32	35	0	1	2	
11	27	1.820.736.00	PARALLEL REMOTE INTERFACE	2	115	117	0	2	5	

 * WILLI STUDER AG * G R O U P S U M M A R Y * 86/12/08 * 10:54 * P A G E 3 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

ASY	GRP	PART NUMBER	DESCRIPTION	UNUSED PINS	USED PINS	TOT. PINS	MULT. PINS	COD. KEYS	TOT. FLW	REM
11	30	1.820.775.00	SPOOLING MOTOR DRIVE AMPLIFIER RIGHT	3	27	30	0	0	3	
11	31	1.820.777.00	SPOOLING MOTOR SUPPLY	12	46	58	0	0	4	
11	32	1.820.790.00	SWITCHING STABILIZER	2	34	36	0	0	2	
11	33	1.820.775.00	SPOOLING MOTOR DRIVE AMPLIFIER LEFT	3	27	30	0	0	3	
11	34	59.26.6223	CAPACITOR, BELONGING TO GRP 31	0	12	12	0	0	2	
11	36	1.820.190.00	TORQUE MOTOR, LEFT	1	11	12	0	0	2	
11	37	1.820.190.00	TORQUE MOTOR, RIGHT	1	11	12	0	0	2	
11	38	1.021.695.00	CAPSTAN MOTOR (ELECTRONICS BOARD)	13	15	28	0	0	5	
11	39	1.820.774.00	CAPSTAN MOTOR DRIVE AMPLIFIER	4	30	34	0	0	3	
11	40	1.080.230.00	BRAKE ASSEMBLY, LEFT	1	2	3	0	0	1	
11	41	1.080.240.00	BRAKE ASSEMBLY, RIGHT	1	2	3	0	0	1	
11	42	1.820.772.00	TAPE TENSION SENSOR, LEFT	3	7	10	0	0	1	
11	43	1.820.772.00	TAPE TENSION SENSOR, RIGHT	3	7	10	0	0	1	
11	44	1.820.793.00	OPTO SENSOR	0	10	10	0	0	1	
11	45	1.820.770.00	MOVE SENSOR	1	9	10	0	0	1	
11	46	1.820.773.00	TAPE LIFTER CONTROL, LEFT	5	11	16	0	0	1	
11	47	1.820.773.00	TAPE LIFTER CONTROL, RIGHT	5	11	16	0	0	1	
11	48	1.820.240.00	PUSHBUTTON ASSEMBLY	4	42	46	0	0	3	
11	49	1.820.250.00	EDIT ASSEMBLY	1	14	15	0	0	2	
11	50	1.820.760.00	TAPE DECK DISPLAY DRIVER	5	117	122	0	0	4	
11	51	1.820.230.00	COMMAND UNIT	3	37	40	0	0	1	
11	52	1.820.233.00	LCD DISPLAY UNIT	0	16	16	0	0	1	
11	59	1.820.737.00	FUSE/SUPPLY FAILURE DETECTOR	1	15	16	0	0	1	
DISTRIBUTED IN 69 GRP TOTAL :				1427	4933	6360	1	15	257	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 4 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

ASY	1	1.861.310.00	RACK ELECTRONICS
GRP 70	1.861.731.00	SIGNAL QUALITY DISPLAY	GRP 73 1.861.583.00 INTERCONNECTICN BOX
CONTINUATION			
ELM 1	1.861.731.00	SIGNAL QUALITY (26-PIN FLATCABLE)	ELM 1 1.861.583.00 BOX-RACK 1 (RACK) (25 PIN D-SUB)
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	+5.0		1 DACOLT1
2	+5.0		2 DACOLT2
3	+5.0		3 PDIBCLK
4	+5.0		4 PDICLK
5	+5.0		5 PDIDATA
6	+5.0		6 TIREFINT
7	DSPB-7		7 TIREFEXT
8	DSPB-6		8 WRTR1
9	DSPB-5		9 WRTR2
10	DSPB-4		10 PBTR1
11	DSPB-3		11 PBTR2
12	DSPB-2		12 PDICLK3
13	DSPB-1		13 PDCLK3
14	DSPB-0		14 GNDCAC1
15	DSPA-0		15 GNDCAC2
16	DSPA-1		16 PDBCLK
17	DSPA-2		17 PDWCLK
18	DSPA-3		18 PDATA
19	DSPA-4		19 TREFINT
20	DSPA-5		20 TREFEXT
21	DSPA-6		21 WRTR1
22	DSPA-7		22 WRTR2
23	+0.0		23 PBTR1
24	+0.0		24 PBTR2
25	+0.0		25 K-PWRUP
26	+0.0		

 * WILLI STUDER AG * L O C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 6 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 79 1.861.726.00
 POWER SUPPLY (DELTA-MOLEX PRINT)

GRP 79 1.861.726.00
 <-- <-- <-- CONTINUATION

GRP 79 1.861.726.00
 <-- <-- <-- CONTINUATION

ELM 1
 POWER CONNECTOR (24 PIN MOLEX FEM)

ELM 2
 POWER CONNECTOR (24 PIN MOLEX MALE)

ELM 3
 CAGE PWR CONNECTOR (25 PIN D-SUB)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.0	3			
2	+5.6	3			
3	+5.6SENS	3			
4	TC-C76K	9			
5	+0.0	0			
6	+0.0	0			
7	I-PWRON	5			
8	+0.0	0			
9	+0.0	0			
10	+0.0	0			
11	+15.0	2			
12	-15.0	6			
13	+0.0	0			
14	+0.0	0			
15	+24.0	7			
16	+REMSUP	8			
17	+STABIN	3			
18	-STABIN	5			
19	-26.0	9			
20	+26.0	1			
21	+0.0	0			
22	+0.0	0			
23	+CAPMOT	4			
24	+CAPMOT	2			

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.6	3			
2	+5.6	3			
3	+5.6SENS	3			
4	TC-C76K	9			
5	+0.0	0			
6	+0.0	0			
7	I-PWRON	5			
8	+0.0	0			
9	+0.0	0			
10	+0.0	0			
11	+15.0	2			
12	-15.0	6			
13	+0.0	0			
14	+0.0	0			
15	+24.0	7			
16	+REMSUP	8			
17	+STABIN	3			
18	-STABIN	5			
19	-26.0	9			
20	+26.0	1			
21	+0.0	0			
22	+0.0	0			
23	+CAPMOT	4			
24	+CAPMOT	2			

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.6V				
2	+5.6V				
3	+5.6V				
4	+5.6V				
5	+15.0				
6	+15.0				
7	+0.0				
8	+0.0				
9	+0.0				
10	-15.0				
11	-15.0				
12	MONTR1				
13	MONTR2				
14	+5.6V				
15	+5.6V				
16	+5.6V				
17	+15.0				
18	+15.0				
19	+15.0				
20	+0.0				
21	+0.0				
22	-15.0				
23	-15.0				
24	-15.0				
25	MONGN0				

 * WILLI STUDER AG * L O C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 5 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 73 1.861.583.00
 <-- <-- <-- CONTINUATION

GRP 74 1.861.582.00
 EXTERNAL PANEL CONNECTOR

GRP 76 1.861.586.00
 CUE INPUT/OUTPUT

ELM 3
 BOX-RACK 3 (CAGE) (25 PIN D-SUB)

ELM 1
 RACK-CCP/DP (25-PIN D-SUB)

ELM 1
 AUX 4 OUTPUT PLUG (XLR MALE)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	BLISYN				
2	WRCLK4				
3	WRIDOUT				
4	WRISYC				
5	DTR18				
6	DTR17				
7	DTR16				
8	DTR15				
9	DTR14				
10	DTR13				
11	DTR12				
12	DTR11				
13					
14	BLISYN				
15	WRCLK4				
16	WRIDOUT				
17	WRISYC				
18	DTR8				
19	DTR7				
20	DTR6				
21	DTR5				
22	DTR4				
23	DTR3				
24	DTR2				
25	DTR1				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	OPCBCLK				
2	OPCBAD				
3	OPCBDAT				
4					
5	+0.0				
6	+0.0				
7	+0.0				
8	+0.0				
9	+0.0				
10	+0.0				
11	+0.0				
12	+0.0				
13	+0.0				
14	OPCBCLK				
15	OPCBAD				
16	OPCBDAT				
17					
18					
19	+20PC				
20	+20PC				
21	+20PC				
22	+20PC				
23	+20PC				
24	+20PC				
25	+20PC				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AUX4GNDD		8		
2	AUX4OUT		5		
3	AUX4IOUT		6		

ELM 2
 AUX 3 OUTPUT PLUG (XLR MALE)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AUX3GNDD		8		
2	AUX3OUT		9		
3	AUX3IOUT		6		

ELM 3
 AUX 3 INPUT PLUG (XLR FEMALE)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AUX3GNDI		8		
2	AUX3IN		9		
3	AUX3IIN		6		

ELM 4
 CUE I/O (CIS IO FEMALE)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AUX4OUT		5		
2	AUX4GNDD		8		
3	AUX4IOUT		6		
4	KEY				
5	AUX3OUT		9		
6	AUX3GNDD		8		
7	AUX3IOUT		6		
8	AUX3IN		9		
9	AUX3GNDI		8		
10	AUX3IIN		6		

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 7 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
* 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION
  
```

```

GRP 79 1.861.726.00
<-- <-- <-- CONTINUATION
  
```

```

GRP 80 1.861.890.00
BACKPANEL RACK
  
```

```

GRP 80 1.861.890.00
<-- <-- <-- CONTINUATION
  
```

```

ELM 4 1.861.816.00
POWER CONNECTOR RACK (25 PIN D-SUB)
  
```

```

ELM 1 1.861.816.00
CUE/PQ DELAY
  
```

```

ELM 1 1.861.816.00
<-- <-- <-- CONTINUATION
  
```

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.6				
2	+5.6				
3	+5.6				
4	+20PC				
5	+20PC				
6	+0.0				
7	+0.0				
8	+15.0				
9	+15.0				
10	-15.0				
11	-15.0				
12	MONTR1				
13	MONTR2				
14	+5.6				
15	+5.6				
16	+20PC				
17	+20PC				
18	+0.0				
19	+0.0				
20	+15.0				
21	+15.0				
22	-15.0				
23	-15.0				
24	K-PWRUP				
25	MONGND				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+0.0				
1B	+0.0				
1C	+0.0				
2A	PDCLK3				
2B					
2C	PDCLK3				
3A					
3B					
3C					
4A	AUX3IN				
4B					
4C	AUX3IN				
5A	ALX3GNDI				
5B					
5C					
6A	WRTR11				
6B					
6C	WRTR11				
7A					
7B					
7C					
8A					
8B					
8C	TRENTST				
9A					
9B					
9C					
10A					
10B					
10C					
11A	PDBCLK				
11B					
11C	PCIBCLK				
12A	PDWCLK				
12B					
12C	PCIWCLK				
13A	PDDATA				
13B					
13C	PDIDATA				
14A	-15.0				
14B	-15.0				
14C	-15.0				
15A	+0.0				
15B	+0.0				
15C	+0.0				
16A	+15.0				
16B	+15.0				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C	+15.0				
17A	SWTR				
17B					
17C	SACKL				
18A	SAH2				
18B					
18C	SAH1				
19A					
19B					
19C	RES1				
20A	DP1				
20B					
20C	DP0				
21A	DP3				
21B					
21C	DP2				
22A	DP5				
22B					
22C	DP4				
23A	DP7				
23B					
23C	DP6				
24A	DP9				
24B					
24C	DP8				
25A	DP11				
25B					
25C	DP10				
26A	DP13				
26B					
26C	DP12				
27A	DP15				
27B					
27C	DP14				
28A					
28B					
28C	RES2				
29A					
29B					
29C	RES3				
30A					
30B					
30C	RES4				
31A	IMON/STF				
31B					
31C					
32A	+5.6				

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 8 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
* 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION
  
```

```

GRP 80 1.861.890.00
<-- <-- <-- CONTINUATION
  
```

```

GRP 80 1.861.890.00
<-- <-- <-- CONTINUATION
  
```

```

GRP 80 1.861.890.00
<-- <-- <-- CONTINUATION
  
```

```

ELM 1 1.861.816.00
<-- <-- <-- CONTINUATION
  
```

```

ELM 2 1.861.811.00
PDM MODULATOR
  
```

```

ELM 2 1.861.811.00
<-- <-- <-- CONTINUATION
  
```

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+5.6				
32C	+5.6				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+0.0				
1B	+0.0				
1C	+0.0				
2A					
2B					
2C					
3A					
3B					
3C					
4A	WRTR11				
4B					
4C	WRTR11				
5A	WRTR12				
5B					
5C	WRTR12				
6A					
6B					
6C					
7A					
7B					
7C					
8A					
8B					
8C					
9A					
9B					
9C					
10A					
10B					
10C					
11A					
11B					
11C					
12A					
12B					
12C					
13A					
13B					
13C					
14A	-15.0				
14B	-15.0				
14C	-15.0				
15A	+0.0				
15B	+0.0				
15C	+0.0				
16A	+15.0				
16B	+15.0				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C	+15.0				
17A	SACKL				
17B					
17C	SWTR				
18A	SAH1				
18B					
18C	SAH2				
19A	RES1				
19B					
19C	ENPH				
20A	DP0				
20B					
20C	DP1				
21A	DP2				
21B					
21C	DP3				
22A	DP4				
22B					
22C	DP5				
23A	DP6				
23B					
23C	DP7				
24A	DP8				
24B					
24C	DP9				
25A	DP10				
25B					
25C	DP11				
26A	DP12				
26B					
26C	DP13				
27A	DP14				
27B					
27C	DP15				
28A	RES2				
28B					
28C	RES5				
29A	RES3				
29B					
29C	RES6				
30A	RES4				
30B					
30C	RES7				
31A	IMON/STF				
31B					
31C					
32A	+5.6				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * PAGE 9 *

 * 1.861.022.00 DB2JX PCM RECORDER * 86/08/27 - 00 *

 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80	1.861.890.00	<-- <-- <--	CONTINUATION
ELM 2	1.861.811.00	<-- <-- <--	CONTINUATION
PNT SIGNAL NAME	COLOR	LV	TYPE F
32B	+5.6		
32C	+5.6		

GRP 80	1.861.890.00	<-- <-- <--	CONTINUATION
ELM 3	1.861.812.00	<-- <-- <--	CONTINUATION
PNT SIGNAL NAME	COLOR	LV	TYPE F
1A	+0.0		
1B	+0.0		
1C	+0.0		
2A			
2B			
2C			
3A			
3B			
3C			
4A	PBTR11		
4B			
4C	PBTR11		
5A			
5B			
5C			
6A	WRTR11		
6B			
6C	WRTR11		
7A	EEPDM		
7B			
7C			
8A	PBTR12		
8B			
8C	PBTR12		
9A			
9B			
9C			
10A	WRTR12		
10B			
10C	WRTR12		
11A			
11B			
11C			
12A			
12B			
12C			
13A			
13B			
13C			
14A	-15.0		
14B	-15.0		
14C	-15.0		
15A	+0.0		
15B	+0.0		
15C	+0.0		
16A	+15.0		
16B	+15.0		

GRP 80	1.861.890.00	<-- <-- <--	CONTINUATION
ELM 3	1.861.812.00	<-- <-- <--	CONTINUATION
PNT SIGNAL NAME	COLOR	LV	TYPE F
16C	+15.0		
17A			
17B			
17C			
18A	TRACK12		
18B			
18C	TRACK11		
19A			
19B			
19C			
20A			
20B			
20C			
21A	RES16		
21B			
21C	RES17		
22A	IAN/PDM		
22B			
22C	HISPD		
23A	RES8		
23B			
23C	RES9		
24A	RES10		
24B			
24C	RES11		
25A	RES12		
25B			
25C	RES13		
26A	RES14		
26B			
26C	RES15		
27A			
27B			
27C			
28A	RES5		
28B			
28C			
29A	RES6		
29B			
29C			
30A	RES7		
30B			
30C			
31A	IMON/STF		
31B			
31C			
32A	+5.6		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * PAGE 10 *

 * 1.861.022.00 DB2JX PCM RECORDER * 86/08/27 - 00 *

 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80	1.861.890.00	<-- <-- <--	CONTINUATION
ELM 3	1.861.812.00	<-- <-- <--	CONTINUATION
PNT SIGNAL NAME	COLOR	LV	TYPE F
32B	+5.6		
32C	+5.6		

GRP 80	1.861.890.00	<-- <-- <--	CONTINUATION
ELM 4	1.861.812.00	<-- <-- <--	CONTINUATION
PNT SIGNAL NAME	COLOR	LV	TYPE F
1A	+0.0		
1B	+0.0		
1C	+0.0		
2A			
2B			
2C			
3A			
3B			
3C			
4A	PBTR12		
4B			
4C	PBTR12		
5A			
5B			
5C			
6A	WRTR12		
6B			
6C	WRTR12		
7A	EEPDM		
7B			
7C			
8A			
8B			
8C			
9A			
9B			
9C			
10A			
10B			
10C			
11A			
11B			
11C			
12A			
12B			
12C			
13A			
13B			
13C			
14A	-15.0		
14B	-15.0		
14C	-15.0		
15A	+0.0		
15B	+0.0		
15C	+0.0		
16A	+15.0		
16B	+15.0		

GRP 80	1.861.890.00	<-- <-- <--	CONTINUATION
ELM 4	1.861.812.00	<-- <-- <--	CONTINUATION
PNT SIGNAL NAME	COLOR	LV	TYPE F
16C	+15.0		
17A			
17B			
17C			
18A	TRACK11		
18B			
18C			
19A			
19B			
19C			
20A			
20B			
20C			
21A	RES16		
21B			
21C	RES17		
22A	IAN/PDM		
22B			
22C	HISPD		
23A	RES9		
23B			
23C	RES8		
24A	RES11		
24B			
24C	RES10		
25A	RES13		
25B			
25C	RES12		
26A	RES15		
26B			
26C	RES14		
27A			
27B			
27C			
28A			
28B			
28C			
29A			
29B			
29C			
30A			
30B			
30C			
31A	IMON/STF		
31B			
31C			
32A	+5.6		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 11 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 4 1.861.812.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+5.6				
32C	+5.6				

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 5 SPARE 1 1.861.815.00

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+C.C				
1B	+0.0				
1C	+0.0				
2A					
2B					
2C					
3A					
3B					
3C					
4A					
4B					
4C					
5A					
5B					
5C					
6A					
6B					
6C					
7A					
7B					
7C					
8A					
8B					
8C					
9A					
9B					
9C					
10A					
10B					
10C					
11A					
11B					
11C					
12A					
12B					
12C					
13A					
13B					
13C					
14A	-15.0				
14B	-15.0				
14C	-15.0				
15A	+0.0				
15B	+0.0				
15C	+0.0				
16A	+15.0				
16B	+15.0				

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 5 1.861.815.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C	+15.0				
17A					
17B					
17C					
18A					
18B					
18C					
19A					
19B					
19C					
20A					
20B					
20C					
21A					
21B					
21C					
22A					
22B					
22C					
23A					
23B					
23C					
24A					
24B					
24C					
25A					
25B					
25C					
26A					
26B					
26C					
27A					
27B					
27C					
28A					
28B					
28C					
29A					
29B					
29C					
30A					
30B					
30C					
31A					
31B					
31C					
32A	+5.6				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 12 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 5 1.861.815.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+5.6				
32C	+5.6				

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 6 1.861.814.00
 ANALCG ROUTING

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+C.C				
1B	+0.0				
1C	+0.0				
2A	DACOUT1				
2B					
2C	GNDAC1				
3A	DACOUT2				
3B					
3C	GNDAC2				
4A	PBITR1				
4B					
4C	+0.0				
5A					
5B					
5C					
6A	AUX3CUT				
6B					
6C	AUX3IQUT				
7A	AUX3GNDO				
7B					
7C	AUX4GNDO				
8A	AUX4QUT				
8B					
8C	AUX4IQUT				
9A					
9B					
9C					
10A					
10B					
10C					
11A					
11B					
11C					
12A					
12B					
12C					
13A					
13B					
13C					
14A	-15.0				
14B	-15.0				
14C	-15.0				
15A	+0.0				
15B	+0.0				
15C	+0.0				
16A	+15.0				
16B	+15.0				

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 6 1.861.814.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C	+15.0				
17A					
17B					
17C	MONTR1				
18A	MONGND				
18B					
18C	MONTR2				
19A	TRACK12				
19B					
19C	TRACK11				
20A					
20B					
20C					
21A					
21B					
21C					
22A					
22B					
22C					
23A	D1				
23B					
23C	D0				
24A	D3				
24B					
24C	D2				
25A	D5				
25B					
25C	D4				
26A	D7				
26B					
26C	D6				
27A	RES19				
27B					
27C	RES18				
28A	PHOSFLA				
28B					
28C	PHOSFLB				
29A	CHASFL1				
29B					
29C	CHASFL2				
30A	ICDUT1WR				
30B					
30C	ICDUT2WR				
31A					
31B					
31C					
32A	+5.6				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 13 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/77 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 6 1.861.814.00
 <-- <-- <-- CONTINUATION

ELM 7 1.861.813.00
 PDM CONTROL

ELM 7 1.861.813.00
 <-- <-- <-- CONTINUATION

PNT SIGNAL NAME	COLOR	LV TYPE	F
32B	+5.0		
32C	+5.0		

PNT SIGNAL NAME	COLOR	LV TYPE	F
1A	+C.0		
1B	+C.0		
1C	+C.0		
2A	CBUSCLK		
2B			
2C	CBUSICLK		
3A	CBUSAD		
3B			
3C	CBUSIAD		
4A	CBUSCAT		
4B			
4C	CBUSIDAT		
5A			
5B			
5C			
6A	DSPA-0		
6B			
6C	DSPA-1		
7A	DSPA-2		
7B			
7C	DSPA-3		
8A	DSPA-4		
8B			
8C	DSPA-5		
9A	DSPA-6		
9B			
9C	DSPA-7		
10A	DSPB-0		
10B			
10C	DSPB-1		
11A	DSPB-2		
11B			
11C	DSPB-3		
12A	DSPB-4		
12B			
12C	DSPB-5		
13A	DSPB-6		
13B			
13C	DSPB-7		
14A	-15.0		
14B	-15.0		
14C	-15.0		
15A	+C.0		
15B	+C.0		
15C	+C.0		
16A	+15.0		
16B	+15.0		

PNT SIGNAL NAME	COLOR	LV TYPE	F
16C	+15.0		
17A	EMPH		
17B			
17C	EEDPM		
18A			
18B			
18C			
19A			
19B			
19C			
20A	MPSMUTE		
20B			
20C			
21A	RES16		
21B			
21C	RES17		
22A	HISPD		
22B			
22C	IAN/PDM		
23A	D0		
23B			
23C	D1		
24A	D2		
24B			
24C	D3		
25A	D4		
25B			
25C	D5		
26A	D6		
26B			
26C	D7		
27A	RES18		
27B			
27C	RES19		
28A	PHOSELB		
28B			
28C	PHOSELA		
29A	CHASEL2		
29B			
29C	CHASEL1		
30A	TCOUT2MR		
30B			
30C	TCOUT1MR		
31A			
31B			
31C	IMON/STF		
32A	+5.6		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 14 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/77 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 7 1.861.813.00
 <-- <-- <-- CONTINUATION

ELM 8 1.861.817.00
 DISPLAY INTERFACE

ELM 8 1.861.817.00
 <-- <-- <-- CONTINUATION

PNT SIGNAL NAME	COLOR	LV TYPE	F
32B	+5.0		
32C	+5.0		

PNT SIGNAL NAME	COLOR	LV TYPE	F
1A	+C.0		
1B	+C.0		
1C	+C.0		
2A	CBUSCLK		
2B			
2C	CBUSICLK		
3A	CBUSAD		
3B			
3C	CBUSIAD		
4A	CBUSCAT		
4B			
4C	CBUSIDAT		
5A			
5B			
5C			
6A			
6B			
6C			
7A			
7B			
7C			
8A			
8B			
8C			
9A			
9B			
9C			
10A			
10B			
10C			
11A			
11B			
11C			
12A			
12B			
12C			
13A			
13B			
13C			
14A	-15.0		
14B	-15.0		
14C	-15.0		
15A	+C.0		
15B	+C.0		
15C	+C.0		
16A	+15.0		
16B	+15.0		

PNT SIGNAL NAME	COLOR	LV TYPE	F
16C	+15.0		
17A			
17B			
17C			
18A			
18B			
18C			
19A			
19B			
19C			
20A	DPCRIDAT		
20B			
20C	DPCRDAT		
21A	DPCRIDAN		
21B			
21C	DPCRAN		
22A	DPCRICLK		
22B			
22C	DPCBCLK		
23A			
23B			
23C			
24A			
24B			
24C			
25A			
25B			
25C			
26A			
26B			
26C			
27A			
27B			
27C			
28A			
28B			
28C			
29A			
29B			
29C			
30A			
30B			
30C			
31A			
31B			
31C			
32A	+5.6		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 15 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 8 1.861.817.00
 <-- <-- <-- CONTINUATION

PNT SIGNAL NAME	COLOR	LV TYPE	F
32B	+5.6		
32C	+5.6		

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 9 SPARE 2

PNT SIGNAL NAME	COLOR	LV TYPE	F
1A	+0.0		
1B	+0.0		
1C	+0.0		
2A			
2B			
2C			
3A			
3B			
3C			
4A			
4B			
4C			
5A			
5B			
5C			
6A			
6B			
6C			
7A			
7B			
7C			
8A			
8B			
8C			
9A			
9B			
9C			
10A			
10B			
10C			
11A			
11B			
11C			
12A			
12B			
12C			
13A			
13B			
13C			
14A	-15.0		
14B	-15.0		
14C	-15.0		
15A	+0.0		
15B	+0.0		
15C	+0.0		
16A	+15.0		
16B	+15.0		

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 9 <-- <-- <-- CONTINUATION

PNT SIGNAL NAME	COLOR	LV TYPE	F
16C	+15.0		
17A			
17B			
17C			
18A			
18B			
18C			
19A			
19B			
19C			
20A			
20B			
20C			
21A			
21B			
21C			
22A			
22B			
22C			
23A			
23B			
23C			
24A			
24B			
24C			
25A			
25B			
25C			
26A			
26B			
26C			
27A			
27B			
27C			
28A			
28B			
28C			
29A			
29B			
29C			
30A			
30B			
30C			
31A			
31B			
31C			
32A	+5.6		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 16 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 9 <-- <-- <-- CONTINUATION

PNT SIGNAL NAME	COLOR	LV TYPE	F
32B	+5.6		
32C	+5.6		

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 13 RACK PWR CONNECTOR (25 PIN D-SUB)

PNT SIGNAL NAME	COLOR	LV TYPE	F
1	+5.6		
2	+5.6		
3	+5.6		
4	+20PC		
5	+20PC		
6	+0.0		
7	+0.0		
8	+15.0		
9	+15.0		
10	-15.0		
11	-15.0		
12	MONTR1		
13	MONTR2		
14	+5.6		
15	+5.6		
16	+20PC		
17	+20PC		
18	+0.0		
19	+0.0		
20	+15.0		
21	+15.0		
22	-15.0		
23	-15.0		
24	K-PWRUP		
25	MCNGND		

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 14 BOX-RACK 1 TO REAR PANEL TD

PNT SIGNAL NAME	COLOR	LV TYPE	F
1	DACOUT1		
2	DACOUT2		
3	PDIACK		
4	PDIWCLK		
5	PDI DATA		
6	TIRFFINT		
7	TIRFFEXT		
8	WRTR1		
9	WRTR2		
10	PBTR1		
11	PBTR2		
12	PDI CLK3		
13	PDI CLK3		
14	GNDDAC1		
15	GNDDAC2		
16	PDBCLK		
17	PDIWCLK		
18	PDI DATA		
19	TIRFFINT		
20	TIRFFEXT		
21	WRTR1		
22	WRTR2		
23	PBTR1		
24	PBTR2		
25	K-PWRUP		

18 WRTR1
 19 WRTR2
 20 WRTR11
 21 WRTR12
 22 PBTR1
 23 PBTR2
 24 PBTR11
 25 PBTR12

 * WILLI STUDER AG * L C C A T I C N P I N L I S T * 86/12/08 * 10:54 * P A G E 17 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 15 1.861.583.00
 BOX-RACK 2 TO REAR PANEL TO

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	SSDAICLK				
2	SSDAIDTR				
3	SSDAIMTX				
4	SSDAIMRX				
5	SSDAICTS				
6	CBUSICLK				
7	CBUSIAD				
8	CBUSICAT				
9					
10	+0V-				
11	+0V-				
12	+0V-				
13	+0V-				
14	SSDAICLK				
15	SSDAUTR				
16	SSDAMTX				
17	SSDAMRX				
18	SSDACTS				
19	CBUSICLK				
20	CBUSAD				
21	CBUSDAT				
22	+2JPC				
23	+2JPC				
24	+2JPC				
25	+2JPC				

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 16 RACK-CUE I/O (25 PIN D-SUB)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AUX4CLT		9		
2	ALX4ICUT		6		
3	AUX3OUT		9		
4	ALX3IOUT		6		
5	AUX3IN		9		
6	AUX3IIN		6		
7					
8					
9					
10					
11					
12					
13					
14	AUX4GNDO		4		
15					
16	AUX3GNDO		4		
17					
18	ALX3GNDI		4		
19					
20					
21					
22					
23					
24					
25					

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 17 SIGNAL QUALITY DISPL.(25 PIN D-SUB)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.6				
2	+5.6				
3	+5.6				
4	DSPB-7				
5	DSPB-5				
6	DSPB-3				
7	DSPB-1				
8	DSPA-0				
9	DSPA-2				
10	DSPA-4				
11	DSPA-6				
12	+0.0				
13	+0.0				
14	+5.6				
15	+5.6				
16	+5.6				
17	DSPB-6				
18	DSPB-4				
19	DSPB-2				
20	DSPB-0				
21	DSPA-1				
22	DSPA-3				
23	DSPA-5				
24	DSPA-7				
25	+0.0				

 * WILLI STUDER AG * L C C A T I C N P I N L I S T * 86/12/08 * 10:54 * P A G E 18 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 18 DISPLAY PANEL/CCP (25 PIN D-SUB)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	DPCBCLK				
2	DPCBAD				
3	DPCBDAT				
4					
5	+0.0				
6	+0.0				
7	+0.0				
8	+0.0				
9	+0.0				
10	+0.0				
11	+0.0				
12	+0.0				
13	+0.0				
14	DPCBICLK				
15	DPCBIAD				
16	DPCBIDAT				
17					
18					
19	+2JPC				
20	+2JPC				
21	+2JPC				
22	+2JPC				
23	+2JPC				
24	+2JPC				
25	+2JPC				

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 19 RACK-MONITOR PANEL (E-SUB CRIMPI)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	DPCBCLK		2		
2	DPCBAD		7		
3	DPCBDAT		8		
4	MPSMLTE		4		
5	+0.0		0		
6	+0.0		0		
7	+5.6		2		
8	+5.6		2		
9	+15.0		3		
10	+15.0		3		
11	+15.0		3		
12	MCNTR1		9		
13	MCNTR2		6		
14	DPCBICLK		4		
15	DPCBIAD		9		
16	DPCBIDAT		5		
17	+0.0		0		
18	+0.0		0		
19	+5.6		2		
20	+5.6		2		
21	+5.6		2		
22	-15.0		1		
23	-15.0		1		
24	-15.0		1		
25	MONGND		4		

GRP 80 1.861.890.00
 <-- <-- <-- CONTINUATION

ELM 21 RACK-TAPE DFCK (SERVO)(26 PIN FLAT)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+0.0				
2	TD-MVCLK				
3	+0.0				
4	TD-MVDIR				
5	+0.0				
6					
7	+0.0				
8	TREFFINT				
9	+0.0				
10	TIRFFINT				
11	+0.0				
12	TREFFXT				
13	+0.0				
14	TIREFFXT				
15	+0.0				
16					
17	+0.0				
18					
19	+0.0				
20					
21	+0.0				
22					
23	+0.0				
24					
25	+0.0				
26					

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 19 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*
ASX 1 1.861.310.00 RACK ELECTRONICS <-- <-- <-- CONTINUATION

```

```

GRP 80 1.861.890.00
<-- <-- <-- CONTINUATION

```

ELM 22 RACK-TAPE DECK (SSDA) (26 PIN FLAT)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	*0.0				
2	TAD-RESA				
3	*0.0				
4	TAD-RESB				
5	*0.0				
6	TAD-RESC				
7	*0.0				
8	SSDACLK				
9	*0.0				
10	SSDAICLK				
11	*0.0				
12	SSDAMTX				
13	*0.0				
14	SSDAIMTX				
15	*0.0				
16	SSDADTR				
17	*0.0				
18	SSDAIDTR				
19	*0.0				
20	SSDACTS				
21	*0.0				
22	SSDAICTS				
23	*0.0				
24	SSDAMRX				
25	*0.0				
26	SSDAIMRX				

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 20 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*
ASX 2 1.861.300.00 CAGE ELECTRONICS

```

```

GRP 1 1.861.895.00
BACKPANEL CAGE

```

ELM 1 1.861.895.00 REARPANEL TD (BOX) (D-SUB 25P)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	BLSYN				
2	WRCLK4				
3	WRIDOUT				
4	WRISYO				
5	DTR18				
6	DTR17				
7	DTR16				
8	DTR15				
9	DTR14				
10	DTR13				
11	DTR12				
12	DTR11				
13					
14	BLSYN				
15	WRCLK4				
16	WRIDOUT				
17	WRISYO				
18	DTR8				
19	DTR7				
20	DTR6				
21	DTR5				
22	DTR4				
23	DTR3				
24	DTR2				
25	DTR1				

```

GRP 1 1.861.895.00
<-- <-- <-- CONTINUATION

```

ELM 2 1.861.895.00 PCWER DELTA MDEX (P2) (D-SUB 25P)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.6V				
2	+5.6V				
3	+5.6V				
4	+5.6V				
5	+15.0				
6	+15.0				
7	+0.0				
8	+0.0				
9	+0.0				
10	-15.0				
11	-15.0				
12	MONTR1				
13	MONTR2				
14	+5.6V				
15	+5.6V				
16	+5.6V				
17	+15.0				
18	+15.0				
19	+15.0				
20	+0.0				
21	+0.0				
22	-15.0				
23	-15.0				
24	-15.0				
25	MONGND				

```

GRP 1 1.861.895.00
<-- <-- <-- CONTINUATION

```

ELM 3 1.861.895.00 RACKPANEL RACK (D-SUB 25P)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	CBUSDAT				
2	CBUSIAD				
3	CBUSICLK				
4					
5					
6	WRTR1				
7	WRTR2				
8	WRTR11				
9	WRTR12				
10	PBTR1				
11	PBTR2				
12	PBTR11				
13	PBTR12				
14	CBUSDAT				
15	CBUSIAD				
16	CBUSICLK				
17					
18	WRTR1				
19	WRTR2				
20	WRTR11				
21	WRTR12				
22	PBTR1				
23	PBTR2				
24	PBTR11				
25	PBTR12				

 * WILLI STUDER AG * L C C A T I C N P I N L I S T * 86/12/08 * 10:54 * PAGE 21 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 2 1.861.300.00 CAGE ELECTRONICS <-- <-- <-- CONTINUATION

GRP 1 1.861.895.00
 <-- <-- <-- CONTINUATION

ELM 4 1.861.804.00
 DETECTOR <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	PBTR4				
1B					
1C	PBTR3				
2A	PBTR6				
2B					
2C	PBTR5				
3A	PBTR8				
3B					
3C	PBTR7				
4A	PBTR10				
4B					
4C	PBTR9				
5A	TDMPRES				
5B					
5C					
6A	WRTR4				
6B					
6C	WRTR3				
7A	WRTR6				
7B					
7C	WRTR5				
8A	WRTR8				
8B					
8C	WRTR7				
9A	WRTR10				
9B					
9C	WRTR9				
10A	DTR1				
10B					
10C	DTR11				
11A	DTR2				
11B					
11C	DTR12				
12A	DTR3				
12B					
12C	DTR13				
13A	DTR4				
13B					
13C	DTR14				
14A	-10				
14B	-10				
14C	-10				
15A	+0.0				
15B	+0.0				
15C	+0.0				
16A	+10				
16B	+10				

GRP 1 1.861.895.00
 <-- <-- <-- CONTINUATION

ELM 4 1.861.804.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C	+10				
17A	DTR5				
17B					
17C	DTR15				
18A	DTR6				
18B					
18C	DTR16				
19A	DTR7				
19B					
19C	DTR17				
20A	DTR8				
20B					
20C	DTR18				
21A	CBUSCLK				
21B					
21C	CBUSICLK				
22A	CBUSAC				
22B					
22C	CBUSIAC				
23A	CBUSCAT				
23B					
23C	CBUSIDAT				
24A	UREC				
24B	SPARE51				
24C	MCN1				
25A	MCN2				
25B	SPARE52				
25C	MCN3				
26A	MCN4				
26B	C3				
26C	MCN5				
27A	IREC1				
27B	G2				
27C	IREC2				
28A	IRECD1				
28B	C1				
28C	IRECD2				
29A	IREC11				
29B	C0				
29C	IREC12				
30A	IMASSA				
30B	HISPC				
30C	SPARE50				
31A	SPARE53				
31B	ICMCD				
31C	ITDSMUTE				
32A	+5.6V				

GRP 1 1.861.895.00
 <-- <-- <-- CONTINUATION

ELM 4 1.861.804.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+5.6V				
32C	+5.6V				

 * WILLI STUDER AG * L C C A T I C N P I N L I S T * 86/12/08 * 10:54 * PAGE 22 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 2 1.861.300.00 CAGE ELECTRONICS <-- <-- <-- CONTINUATION

GRP 1 1.861.895.00
 <-- <-- <-- CONTINUATION

ELM 5 1.861.803.00
 WHITE AMPLIFIER <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A					
1B					
1C					
2A	WRTR1				
2B					
2C	WRTR1				
3A	WRTR2				
3B					
3C	WRTR2				
4A	WRTR11				
4B					
4C	WRTR11				
5A	WRTR12				
5B					
5C	WRTR12				
6A	WRTR3				
6B					
6C	WRTR4				
7A	WRTR5				
7B					
7C	WRTR6				
8A	WRTR7				
8B					
8C	WRTR8				
9A	WRTR9				
9B					
9C	WRTR10				
10A					
10B					
10C					
11A					
11B					
11C					
12A					
12B					
12C					
13A					
13B					
13C					
14A	-10				
14B	-10				
14C	-10				
15A	+0.0				
15B	+0.0				
15C	+0.0				
16A	+10				
16B	+10				

GRP 1 1.861.895.00
 <-- <-- <-- CONTINUATION

ELM 5 1.861.803.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C	+10				
17A	WRSYC				
17B					
17C	WRISYC				
18A	WRDOLT				
18B					
18C	WRIDCUT				
19A	WRCLK4				
19B					
19C	WRICLK4				
20A	BLSYN				
20B					
20C	BLSYN				
21A					
21B					
21C					
22A					
22B					
22C					
23A					
23B					
23C					
24A					
24B					
24C	UREC				
25A					
25B					
25C					
26A					
26B					
26C					
27A	IREC2				
27B					
27C	IREC1				
28A	IRECD2				
28B					
28C	IRECD1				
29A	IREC12				
29B					
29C	IREC11				
30A	SPARE50				
30B					
30C	IMASSA				
31A					
31B					
31C	SPARE53				
32A	+5.6V				

GRP 1 1.861.895.00
 <-- <-- <-- CONTINUATION

ELM 5 1.861.803.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+5.6V				
32C	+5.6V				

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 23 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
ASY 2 1.861.300.00 CAGE ELECTRONICS <-- <-- <-- CONTINUATION
GRP 1 1.861.895.00 GRP 1 1.861.895.00 GRP 1 1.861.895.00
<-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION
*****
ELM 6 1.861.802.00 ELM 6 1.861.802.00 ELM 6 1.861.802.00
TAPE DECK MONITOR <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION
*****
PNT SIGNAL NAME COLOR LV TYPE F PNT SIGNAL NAME COLOR LV TYPE F PNT SIGNAL NAME COLOR LV TYPE F
-----
1A 16C +10 32B +5.6V
1B 17A +15.0 32C +5.6V
1C 17B +15.0
2A 17C +15.0
2B 18A MCNTR1
2C 18B
3A 18C MCNGND
3B 19A MCNTR2
3C 19B
4A 19C
4B 20A
4C 20B
5A TDMPRES 20C
5B 21A
5C 21B
6A 21C
6B 22A
6C 22B
7A 22C
7B 23A
7C 23B
8A 23C
8B 24A MGN1
8C 24B
9A 24C
9B 25A MGN3
9C 25B
10A 25C MCN2
10B 26A MCN5
10C 26B
11A 26C MCN4
11B 27A
11C 27B
12A 27C
12B 28A
12C 28B
13A -15.0 28C
13B -15.0 29A
13C -15.0 29B
14A -10 29C
14B -10 30A
14C -10 30B
15A +0.0 30C
15B +0.0 31A ITDSMUTE
15C +0.0 31B
16A +10 31C
16B +10 32A +5.6V
././
    
```

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 24 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
ASY 2 1.861.300.00 CAGE ELECTRONICS <-- <-- <-- CONTINUATION
GRP 1 1.861.895.00 GRP 1 1.861.895.00 GRP 1 1.861.895.00
<-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION
*****
ELM 7 1.861.801.00 ELM 7 1.861.801.00 ELM 7 1.861.801.00
PLAYBACK AMPLIFIER <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION
*****
PNT SIGNAL NAME COLOR LV TYPE F PNT SIGNAL NAME COLOR LV TYPE F PNT SIGNAL NAME COLOR LV TYPE F
-----
1A PBTR3 16C +10 32B +5.6V
1B 17A +15.0 32C +5.6V
1C PBTR4 17B +15.0
2A PBTR5 17C +15.0
2B 18A PBTR1
2C PBTR6 18B
3A PBTR7 18C PBTR1
3B 19A PBTR2
3C PBTR8 19B
4A PBTR9 19C PBTR2
4B 20A PBTR11
4C PBTR10 20B
5A 20C PBTR11
5B 21A PBTR12
5C 21B
6A 21C PBTR12
6B 22A
6C 22B
7A 22C
7B 23A
7C 23B
8A 23C
8B 24A
8C 24B SPARE51
9A 24C
9B 25A
9C 25B SPARE52
10A 25C
10B 26A
10C 26B C3
11A 26C
11B 27A
11C 27B C2
12A 27C
12B 28A
12C 28B C1
13A -15.0 28C
13B -15.0 29A
13C -15.0 29B C0
14A -10 29C
14B -10 30A
14C -10 30B HISPD
15A +0.0 30C
15B +0.0 31A
15C +0.0 31B TCMD0
16A +10 31C
16B +10 32A +5.6V
././
    
```

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 25 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 2 1.861.300.00 CAGE ELECTRONICS <-- <-- <-- CONTINUATION

GRP 2 1.861.803.00 HEADBLOCK CONNECTOR WRITE				GRP 3 1.861.801.00 HEADBLOCK CONNECTOR READ				GRP 4 1.861.807.00 TAPE DECK MONITOR CONNECTORS						
ELM 1 1.861.803.00 HEADBLOCK WRITE (P4) (D-SUB 25P)				ELM 1 1.861.801.00 HEADBLOCK READ (P4) (D-SUB 25P)				ELM 1 1.861.807.00 INTERNAL SPEAKER CONNECTOR J1 (CIS)						
PNT	SIGNAL NAME	COLOR	LV TYPE	F	PNT	SIGNAL NAME	COLOR	LV TYPE	F	PNT	SIGNAL NAME	COLOR	LV TYPE	F
1	WRTOUT1				1	HCTR5				1	TDSPE1			
2	IWROUT1				2	HCTR9				2	TCSPIGND			
3	WRTOUT2				3	HDTR7				3	TDSPE1			
4	IWROUT2				4	HDTR3								
5	WRTOUT3				5	HCTR4								
6	IWROUT3				6	HDTR8								
7	WRTOUT4				7	HDTR10								
8	IWROUT4				8	HDTR6								
9	WRTOUT5				9	HDTR1								
10	IWROUT5				10	HDTR11								
11	WRTOUT6				11	HDTR12								
12	IWROUT6				12	HCTR2								
13	WRTOUT7				13	+10								
14	IWROUT7				14	+10								
15	WRTOUT8				15	+10								
16	IWROUT8				16	+10								
17	WRTOUT9				17	+10								
18	IWROUT9				18	+0.0								
19	WRTOUT10				19	+0.0								
20	IWROUT10				20	+0.0								
21					21	+0.0								
22					22	-10								
23	WRTOUT11				23	-10								
24	IWROUT11				24	-10								
25	WRTOUT12				25	-10								
26	IWROUT12													

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 26 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 2 1.861.300.00 CAGE ELECTRONICS <-- <-- <-- CONTINUATION

GRP 5 71.01.0108 INTERNAL SPEAKER				GRP 6 54.24.C102 INTERNAL PHONE PLUG					
ELM 1 71.010.108.00 INTERNAL SPEAKER (SOLD.)				ELM 1 54.24C.102.00 INTERNAL PHONE PLUG (SOLD.)					
PNT	SIGNAL NAME	COLOR	LV TYPE	F	PNT	SIGNAL NAME	COLOR	LV TYPE	F
1	TDSPE1				1	TDPH01			
2	TDSPIGND				2	TDPH02			
					3	+0.0			
					4				
					5				
					6	PH0CCN			

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 27 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 3 1.861.350.00 PANELS (VERSION D820X-MC0)

GRP 1 1.861.742.00 DISPLAY PANEL PROCESSOR (DP PROC)				GRP 1 1.861.742.00 <-- <-- <-- CONTINUATION				GRP 2 1.861.744.00 CHANNEL CONTROL PANEL TRANSCEIVER						
ELM 1 1.861.742.00 CBUS CCP TRANSCEIVER (D-SUB 25P F)				ELM 2 1.861.742.00 DATA DP KEYBOARD (FLATCABLE 26P)				ELM 1 1.861.744.00 BUS REARPANEL TD (D-SUB 25P M)						
PNT	SIGNAL NAME	COLOR	LV TYPE	F	PNT	SIGNAL NAME	COLOR	LV TYPE	F	PNT	SIGNAL NAME	COLOR	LV TYPE	F
1	DPCBCLK				1	DPDC				1	DPCBCLK			
2	DPCBAD				2	+5.0				2	DPCBAD			
3	DPCBUAT				3	DPD1				3	DPCBDAT			
4					4	+5.0				4				
5	+0.0				5	DPD2				5	+0.0			
6	+0.0				6	+5.0				6	+0.0			
7	+0.0				7	DPD3				7	+0.0			
8	+0.0				8	+5.0				8	+0.0			
9	+0.0				9	DPD4				9	+0.0			
10	+0.0				10	+5.0				10	+0.0			
11	+0.0				11	DPD5				11	+0.0			
12	+0.0				12	+5.0				12	+0.0			
13	+0.0				13	DPD6				13	+0.0			
14	DPCBCLK				14	+0.0				14	DPCBCLK			
15	DPCBIAD				15	DPD7				15	DPCBIAD			
16	DPCBIADAT				16	+0.0				16	DPCBIADAT			
17					17	DPKEYS				17				
18					18	+0.0				18				
19	+20PC				19	D-WRITE				19	+20PC			
20	+20PC				20	+0.0				20	+20PC			
21	+20PC				21	DPMDDE				21	+20PC			
22	+20PC				22	+0.0				22	+20PC			
23	+20PC				23					23	+20PC			
24	+20PC				24	+0.0				24	+20PC			
25	+20PC				25					25	+20PC			
					26	+0.0								

 * WILLI STUDER AG * L G C A T I C N P I N L I S T * 86/12/08 * 10:54 * P A G E 28 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 3 1.861.350.00 PANELS (VERSION D820X-MCD) <-- <-- <-- CONTINUATION

GRP 2 1.861.744.00
 <-- <-- <-- CONTINUATION

ELM 2 1.861.744.00
 CBUS DP PROCESSOR (D-SUB 25P F)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	DPCBCLK				
2	DPCBAC				
3	DPCBDAT				
4					
5	+0.0				
6	+0.0				
7	+0.0				
8	+0.0				
9	+0.0				
10	+0.0				
11	+0.0				
12	+0.0				
13	+0.0				
14	DPCBCLK				
15	DPCBIAD				
16	DPCBIDAT				
17					
18					
19	+2JPC				
20	+2JPC				
21	+2JPC				
22	+2JPC				
23	+2JPC				
24	+2JPC				
25	+2JPC				

GRP 2 1.861.744.00
 <-- <-- <-- CONTINUATION

ELM 3 1.861.744.00
 DATA CCP KEYBOARD (FLTCAR. 26P)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1					
2					
3					
4	SBITC				
5	SBIT1				
6	SBIT2				
7	SBIT3				
8	SBIT4				
9	SBIT5				
10	SBIT6				
11	SBIT7				
12	SBY2				
13	SBY1				
14	SBYC				
15	LBITC				
16	LBIT1				
17	LBIT2				
18	LBIT3				
19	LBIT4				
20	LBIT5				
21	LBIT6				
22	LBIT7				
23					
24	LBY2				
25	LBV1				
26	LBVC				

GRP 3 1.861.746.00
 MONITOR PANFL AMPLIFR (MP AMP)

ELM 1 1.861.744.00
 CRUS RFARPANEL RACK (D-SUB 25P M)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	DPCBCLK				
2	DPCBAD				
3	DPCRDAT				
4	MPSMUTE				
5	+0.0				
6	+0.0				
7	+5.6				
8	+5.6				
9	+15.0				
10	+15.0				
11	+15.0				
12	MONTR?				
13	MONTR1				
14	DPCBCLK				
15	DPCBIAD				
16	DPCBIDAT				
17	+0.0				
18	+0.0				
19	+5.6				
19	KMCUE1				
20	+5.6				
21	+5.6				
22	-15.0				
23	-15.0				
24	-15.0				
25	MONGND				

ELM 4 1.861.744.00
 POWER CCP KEYBOARD (FLATCABEL 10P)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+0.0				
2	+5.0				
3	+0.0				
4	+5.0				
5	+0.0				
6	+5.0				
7	+0.0				
8	+5.0				
9	+0.0				
10	+5.0				

ELM 2 1.861.746.00
 AUDIO SPEAKFR RIGHT (CIS 3P) J3

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	CODE				
2	MPSPR?	0			
3	MPSPR1	2			

 * WILLI STUDER AG * L G C A T I C N P I N L I S T * 86/12/08 * 10:54 * P A G E 29 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 3 1.861.350.00 PANELS (VERSION D820X-MCD) <-- <-- <-- CONTINUATION

GRP 3 1.861.746.00
 <-- <-- <-- CONTINUATION

ELM 3 1.861.746.00
 AUDIO SPEAKER LEFT (CIS 5P) J4

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	SWITCH	1			
2	CODE				
3	MPSPL1	2			
4	MPSPL2	0			
5	SWITCGND	1			

ELM 4 1.861.746.00
 AUDIO PHONES PLUG (CIS 6P) J2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	CODE				
2	PHOSW	5			
3	CODE				
4	PHQL	9			
5	PHOR	2			
6	PHUGND	4			

ELM 5 1.912.001.30
 TO TANDEM POT (CIS 6P) J1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	TANTR2				
2	TAVAR2				
3	MONGND				
4	CODE				
5	TAVAR1				
6	TANTR1				

GRP 3 1.861.746.00
 <-- <-- <-- CONTINUATION

ELM 6 1.861.746.00
 DATA MP KEYBOARD (FLATCABLE 26P)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+0.0				
2	BMCAUX				
3	+0.0				
4	BMCE2				
5					
6	BMCMIX				
7					
8	BMCE1				
9					
10	BMCC2				
11					
12	BMCC1				
13					
14	BMCTAP				
15	MCPRES				
16	BMCTINP				
17	KMCUE2				
18	KINTAP				
19	KMCUE1				
20	KMCCH1				
21					
22	KMCCH2				
23	+5.0				
24					
25	+5.0				
26	KMCTC				

GRP 4 71.01.0108
 SPEAKFR RIGHT

ELM 1 71.01.0108
 SPEAKFR RIGHT

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	MPSPR1	?			
2	MPSPR2	0			

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 30 *
 * 1.861.022.00 D820X PCM RECORDER * * 86/08/27 - 00 *
 ASY 3 1.861.350.00 PANELS (VERSION D820X-MCD) <-- <-- <-- CONTINUATION

GRP 5	71.01.0108	GRP 6	54.24.0102	GRP 7	1.912.001.30
SPEAKER LEFT		PHONES PLUG		TANDEM PCTFNOMETER	
ELM 1 71.01.0108		ELM 1 54.24.0102		ELM 1 1.912.001.30	
SPEAKER LEFT		PHONES PLUG		TANDEM POT SOLD.	
PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE
1 MPSPL1	2	2 PHOSb	5	1 TANTR1	
2 MPSPL2	0	4 PHGL	5	2 TAVAR1	
		5 PHQR	2	3 MONGND	
		6 PHQND	4	4 TAVAR2	
				5 TANTR2	
				6 MONGND	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 31 *
 * 1.861.022.00 D820X PCM RECORDER * * 86/08/27 - 00 *
 ASY 3 1.861.350.00 PANELS (VERSION D820X-MCD) <-- <-- <-- CONTINUATION

GRP 8	1.861.745.00	GRP 9	1.861.741.00	GRP 10	1.861.743.00
MONITOR PANEL KEYBOARD(MP KYB)		DISPLAY PANEL KEYBOARD (DP KYB)		CHANNEL CONTROL PANEL KEYBOARD	
ELM 1 1.861.745.00		ELM 1 1.861.741.00		ELM 1 1.861.743.00	
DATA MP AMPLIF (FLATCAB. SOLD. 26P)		DATA DP PROC (FLATCAB. SOLD. 26P.)		DATA CCP TRANSCFIV. (FLATCABLE 26P)	
PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE
1 +0.0		1 DPDC		1	
2 BMCAUX		2 +5.0		2	
3 +0.0		3 DPDI		3	
4 BMGUE2		4 +5.0		4 SBIT0	
5		5 DPDI		5 SBIT1	
6 BMCMIX		6 +5.0		6 SBIT2	
7		7 DPDI		7 SBIT3	
8 BMGUE1		8 +5.0		8 SBIT4	
9		9 DPDI		9 SBIT5	
10 BMCH2		10 +5.0		10 SBIT6	
11		11 DPDI		11 SBIT7	
12 BMCH1		12 +5.0		12 SBV7	
13		13 DPDI		13 SBV1	
14 BMCTAP		14 +0.0		14 SBV0	
15 MGPRES		15 DPDI		15 LBIT0	
16 BMGINP		16 +0.0		16 LBIT1	
17 KMGUE2		17 DPKEYS		17 LBIT2	
18 KINTAP		18 +0.0		18 LBIT3	
20 KMGCH1		19 D-WRITE		19 LBIT4	
21		20 +0.0		20 LBIT5	
22 KMGCH2		21 DPMODE		21 LBIT6	
23 +5.0		22 +0.0		22 LBIT7	
24		23		23	
25 +5.0		24 +0.0		24 LRY2	
26 KMCTC		25		25 LBY1	
		26 +0.0		26 LRY0	

ELM 2	1.861.744.00
POWER CCP TRANSC. (FLTCAB. SOLD. 10P)	
PNT SIGNAL NAME	COLOR LV TYPE
1 +0.0	
2 +5.0	
3 +0.0	
4 +5.0	
5 +0.0	
6 +5.0	
7 +0.0	
8 +5.0	
9 +0.0	
10 +5.0	


```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 32 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
* 1.861.320.00 ELECTRONICS BOX
ASX 4

```

```

GRP 1 1.861.885.00
BACKPANEL DOX

```

```

GRP 1 1.861.885.00
CONTINUATION

```

```

GRP 1 1.861.885.00
CONTINUATION

```

```

ELM 1 1.861.751.00
ANALOG OUTPUT

```

```

ELM 1 1.861.751.00
CONTINUATION

```

```

ELM 1 1.861.751.00
CONTINUATION

```

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+0V-				
1B	+0V-				
1C	+0V-				
2A	+0V-				
2B	+0V-				
2C	+0V-				
3A	+0V-				
3B	+0V-				
3C	+0V-				
4A					
4B					
4C					
5A	+5V-				
5B	+5V-				
5C	+5V-				
6A	+5V-				
6B	+5V-				
6C	+5V-				
7A	DABCDAL				
7B	DAIBCDAL				
7C					
8A					
8B					
8C					
9A					
9B	FLEM				
9C					
10A	DA9oFS				
10B	DAI9oFS				
10C					
11A	-2J				
11B	-2J				
11C	-2J				
12A					
12B	DDIDIGMU				
12C					
13A	ANA-GND				
13B	ANA-GND				
13C	ANA-GND				
14A	GNDDAC1				
14B	DACOUT1				
14C					
15A	ANADUT-1				
15B	GNDOUT-1				
15C	ANAIDUT1				
16A					
16B					

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C					
17A	ANADUT-2				
17B	GNDOUT-2				
17C	ANAIGUT2				
18A					
18B	DACCLT2				
18C	GNDDAC2				
19A	ANA-GND				
19B	ANA-GND				
19C	ANA-GND				
20A	ANA-GND				
20B					
20C					
21A	+2J				
21B	+2J				
21C	+2J				
22A	CBUSCLK				
22B	CBUSICLK				
22C					
23A	CBUSAD				
23B	CBUSIAD				
23C					
24A	CBUSDAT				
24B	CBUSICAT				
24C					
25A					
25B					
25C					
26A					
26B					
26C					
27A	+5V-				
27B	+5V-				
27C	+5V-				
28A	+5V-				
28B	+5V-				
28C	+5V-				
29A	DADAT21				
29B	DAIDAT21				
29C					
30A	DADAT11				
30B	DAIDAT11				
30C					
31A	DAVALIA				
31B	DAIVALIA				
31C					
32A	+0V-				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+0V-				
32C	+0V-				

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 33 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
* 1.861.320.00 ELECTRONICS BOX
ASX 4

```

```

GRP 1 1.861.885.00
CONTINUATION

```

```

GRP 1 1.861.885.00
CONTINUATION

```

```

GRP 1 1.861.885.00
CONTINUATION

```

```

ELM 2 1.861.752.00
ANALOG INPUT

```

```

ELM 2 1.861.752.00
CONTINUATION

```

```

ELM 2 1.861.752.00
CONTINUATION

```

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+0V-				
1B	+0V-				
1C	+0V-				
2A	+0V-				
2B	+0V-				
2C	+0V-				
3A	+0V-				
3B	+0V-				
3C	+0V-				
4A					
4B					
4C	FLEM				
5A	+5V-				
5B	+5V-				
5C	+5V-				
6A	+5V-				
6B	+5V-				
6C	+5V-				
7A	ADBCCLKA				
7B					
7C	ADIBCCLKA				
8A	ADSTART				
8B					
8C	ADISTART				
9A	DITHER				
9B					
9C					
10A					
10B					
10C					
11A	-2J				
11B	-2J				
11C	-2J				
12A					
12B					
12C					
13A	ANA-GND				
13B	ANA-GND				
13C	ANA-GND				
14A					
14B					
14C					
15A	ANAIN-1				
15B	GNDIN-1				
15C	ANAIN-1				
16A					
16B					

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C					
17A	ANAIN-2				
17B	GNDIN-2				
17C	ANAIN-2				
18A					
18B					
18C					
19A	ANA-GND				
19B	ANA-GND				
19C	ANA-GND				
20A					
20B					
20C					
21A	+2J				
21B	+2J				
21C	+2J				
22A	CBUSCLK				
22B	CBUSICLK				
22C					
23A	CBUSAD				
23B	CBUSIAD				
23C					
24A	CBUSDAT				
24B	CBUSICAT				
24C					
25A	ADCCCLIP1				
25B					
25C	ADCCCLIP2				
26A					
26B					
26C					
27A	+5V-				
27B	+5V-				
27C	+5V-				
28A	+5V-				
28B	+5V-				
28C	+5V-				
29A	ADDAT2				
29B	ADICAT2				
29C					
30A	ADDAT1				
30B	ADICAT1				
30C					
31A	ADVALID				
31B	ADIVALID				
31C					
32A	+0V-				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+0V-				
32C	+0V-				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 34 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS EGX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION
 GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION

ELM 3 SPARE 1 <-- <-- <-- CONTINUATION
 ELM 3 <-- <-- <-- CONTINUATION

PNT SIGNAL NAME	CLDR LV TYPE	F	PNT SIGNAL NAME	CLDR LV TYPE	F
1A +0V-			16C		
1B +0V-			17A		
1C +0V-			17B		
2A +0V-			17C		
2B +0V-			18A CBUSCLK		
2C +0V-			18B CBUSICKL		
3A +0V-			18C CBUSAD		
3B +0V-			19A CBUSIAD		
3C +0V-			19B CBUSCAT		
4A			19C CBUSIDAT		
4B			20A		
4C			20B		
5A +5V-			20C		
5B +5V-			21A		
5C +5V-			21B		
6A +5V-			21C		
6B +5V-			22A		
6C +5V-			22B		
7A			22C		
7B			23A		
7C			23B		
8A			23C		
8B			24A		
8C			24B		
9A			24C		
9B			25A		
9C			25B		
10A			25C		
10B			26A		
10C			26B		
11A			26C		
11B			27A +5V-		
11C			27B +5V-		
12A			27C +5V-		
12B			28A +5V-		
12C			28B +5V-		
13A			28C +5V-		
13B			29A		
13C			29B		
14A			29C		
14B			30A +0V-		
14C			30B +0V-		
15A			30C +0V-		
15B			31A +0V-		
15C			31B +0V-		
16A			31C +0V-		
16B			32A +0V-		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 35 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BCX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION
 GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION

ELM 4 GAINS CONTROL 1.861.853.00 <-- <-- <-- CONTINUATION
 ELM 4 1.861.853.00 <-- <-- <-- CONTINUATION

PNT SIGNAL NAME	CLDR LV TYPE	F	PNT SIGNAL NAME	CLDR LV TYPE	F
1A +0V-			16C DDC3		
1B +0V-			17A UDCLK1G		
1C +0V-			17B UDCLK1L		
2A +0V-			17C UDMPCHF		
2B +0V-			18A CBUSCLK		
2C +0V-			18B CBUSICKL		
3A +0V-			18C CBUSAD		
3B +0V-			19A CBUSIAD		
3C +0V-			19B CBUSCAT		
4A DDFADD1			19C CBUSIDAT		
4B DDFADD0			20A DCIDIGMU		
4C DDIFVAL			20B SPARE55		
5A +5V-			20C		
5B +5V-			21A DDMUTE		
5C +5V-			21B SPLINIT		
6A +5V-			21C RES3		
6B +5V-			22A -20		
6C +5V-			22B		
7A DDBCLK			22C SECSYN		
7B CHAESB			23A ICARRY		
7C DDBSYNIN			23B BSYNCOU		
8A			23C +20		
8B DDDATAG1			24A RES4		
8C DDCLKG1			24B RES5		
9A JDLCLK1			24C ADCCLIP1		
9B			25A CLK4		
9C			25B ADCCLIP2		
10A DDGRDY1			25C RES8		
10B DDPROA9			26A RES9		
10C			26B RES10		
11A DDPROA0			26C RES11		
11B DDPROA1			27A +5V-		
11C DDPROA2			27B +5V-		
12A DDPROA3			27C +5V-		
12B DDPROA4			28A +5V-		
12C DDPROA5			28B +5V-		
13A DDPROA6			28C +5V-		
13B DDPROA7			29A FLEM		
13C DDPROA8			29B RES12		
14A DDCHPHD			29C DCINIT		
14B			30A +0V-		
14C AESIN			30B +0V-		
15A DDATAAES			30C +0V-		
15B DDCK2AES			31A +0V-		
15C DDCHSTAT			31B +0V-		
16A			31C +0V-		
16B AESIN			32A +0V-		

```

*****
* WILLI STUDEF AG * L C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 36 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

```

```

GRP 1 1.861.885.00 GRP 1 1.861.885.00 GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

```

```

ELM 5 1.861.854.00 ELM 5 1.861.854.00 ELM 5 1.861.854.00
DAPRU INTERFACE <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

```

PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+CV-					16C	ACICATI1					32B	+0V-				
1B	+CV-					17A	ADDA2					32C	+CV-				
1C	+CV-					17B	ADIDAT2										
2A	+CV-					17C	AES1A										
2B	+0V-					18A	DDLCLK1C										
2C	+0V-					18B	DDLCLK11										
3A	+CV-					18C	PULLUP11										
3B	+0V-					19A											
3C	+0V-					19B											
4A						19C	DCIDAVAL										
4B						20A	SPLINIT										
4C	DDGHPRO					20B	PDATA1A										
5A	+5V-					20C	PCICATA										
5B	+5V-					21A	PCWCLK										
5C	+5V-					21B	PCIWCLK										
6A	+5V-					21C	PBCLK										
6B	+5V-					22A	PCIBCLK										
6C	+5V-					22B	DCENCODAP										
7A	DDFAADD1					22C											
7B	DDFAADD2					23A	ICARRY										
7C	DDIFVAL					23B	BSYNCOUT										
8A	DDCLK					23C	AES01										
8B	CHAESB					24A	AESIC1										
8C	DDSYNIN					24B	AES1A										
9A	DDATAAES					24C	AESIIN										
9B	DDCK2AES					25A	CLK4										
9C	DDCHSTAT					25B	CLK5										
10A	DA96FS					25C	2ECCLK										
10B	DA196FS					26A	12ECCLK										
10C	DDISTART					26B											
11A	DAVAL1A					26C											
11B	DAIVAL1A					27A	+5V-										
11C	DABCDAL					27B	+5V-										
12A	DAIHCDAL					27C	+5V-										
12B	DADAT11					28A	+5V-										
12C	DAIDAT11					28B	+5V-										
13A	DADAT21					28C	+5V-										
13B	DAIDAT21					29A											
13C	AESIIN					29B											
14A	DDGHPRO					29C	PULLUP12										
14B	ADVALID					30A	+CV-										
14C	ADIVALID					30B	+CV-										
15A	ADDCLKA					30C	+CV-										
15B	ADIUCLKA					31A	+CV-										
15C	ADSTART					31B	+CV-										
16A	ADISTART					31C	+CV-										
16B	ADDAT1					32A	+CV-										

```

*****
* WILLI STUDEF AG * L C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 37 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

```

```

GRP 1 1.861.885.00 GRP 1 1.861.885.00 GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

```

```

ELM 6 1.861.855.00 ELM 6 1.861.855.00 ELM 6 1.861.855.00
DATA PROCESSOR <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

```

PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+0V-					16C	DDC3					32B	+0V-				
1B	+0V-					17A						32C	+CV-				
1C	+0V-					17B											
2A	+0V-					17C	DDHPOFF										
2B	+0V-					18A	DDLCLK10										
2C	+0V-					18B	DDLCLK11										
3A	+CV-					18C											
3B	+0V-					19A											
3C	+0V-					19B											
4A	RES15					19C											
4B	RES16					20A	SPLINIT										
4C	RES17					20B	SPARE95										
5A	+5V-					20C											
5B	+5V-					21A	DDMUTE										
5C	+5V-					21B											
6A	+5V-					21C	RES3										
6B	+5V-					22A	ADCCCLIP1										
6C	+5V-					22B	RES4										
7A	RES18					22C	ADCCCLIP2										
7B	RES19					23A	DCINVAL										
7C	RES20					23B	DCFMUT										
8A	RES21					23C	DCFSPL										
8B						24A	RES5										
8C						24B	ADCCCLIP1										
9A						24C	ADCCCLIP2										
9B						25A	CLK4										
9C	DD3HEAD					25B											
10A						25C											
10B	DDPROA9					26A											
10C	DDISTART					26B											
11A	DDPROA0					26C											
11B	DDPROA1					27A	+5V-										
11C	DDPROA2					27B	+5V-										
12A	DDPROA3					27C	+5V-										
12B	DDPROA4					28A	+5V-										
12C	DDPROA5					28B	+5V-										
13A	DDPROA6					28C	+5V-										
13B	DDPROA7					29A	DCINIT										
13C	DDPROA8					29B											
14A	DDGHPRO					29C											
14B	DDFGA1					30A	+0V-										
14C	DDBD14					30B	+CV-										
15A	DDBD13					30C	+CV-										
15B	DDBD14					31A	+CV-										
15C	DDBD15					31B	+CV-										
16A	DDMIEN1					31C	+CV-										
16B	DDCLRG					32A	+CV-										

```

*****
* WILLI STUDER AG * L C C A I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 38 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION

```

```

ELM 7 1.861.856.00
COEFFICIENT GENERATOR

```

PNT	SIGNAL NAME	CCLR	LV	TYPE	F
1A	+0V-				
1B	+0V-				
1C	+CV-				
2A	+0V-				
2B	+0V-				
2C	+0V-				
3A	+CV-				
3B	+0V-				
3C	+0V-				
4A	RES15				
4B	RES16				
4C	RES17				
5A	+5V-				
5B	+5V-				
5C	+5V-				
6A	+5V-				
6B	+5V-				
6C	+5V-				
7A	RES18				
7B	RES19				
7C	RES20				
8A	RES21				
8B	DDDATAG1				
8C	DDCLKG1				
9A	DDCLKK1				
9B					
9C	DD3HEAD				
10A	DDGRDY1				
10B	DDPROA9				
10C	PULLUP9				
11A	DDPRUA0				
11B	DDPROA1				
11C	DDPROA2				
12A	DDPROA3				
12B	DDPROA4				
12C	DDPROA5				
13A	DDPROA6				
13B	DDPROA7				
13C	DDPROA8				
14A	DDCHPRO				
14B	DDFGAI				
14C	DDBD14				
15A	DDBD213				
15B	DDBD214				
15C	DDBD215				
16A	DDMIE11				
16B	DDCLRG				

./.

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION

```

```

ELM 7 1.861.856.00
<-- <-- <-- CONTINUATION

```

PNT	SIGNAL NAME	CCLR	LV	TYPE	F
16C					
17A					
17B					
17C					
18A					
18B					
18C					
19A	DCD1CLK				
19B	DCD2CLK				
19C					
20A					
20B					
20C					
21A					
21B					
21C					
22A					
22B					
22C	DCDAPDEC				
23A					
23B					
23C	RES22				
24A					
24B					
24C					
25A	CLK4				
25B	CLK5				
25C					
26A					
26B					
26C					
27A	+5V-				
27B	+5V-				
27C	+5V-				
28A	+5V-				
28B	+5V-				
28C	+5V-				
29A					
29B					
29C					
30A	+0V-				
30B	+CV-				
30C	+CV-				
31A	+CV-				
31B	+CV-				
31C	+CV-				
32A	+CV-				

./.

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION

```

```

ELM 7 1.861.856.00
<-- <-- <-- CONTINUATION

```

PNT	SIGNAL NAME	CCLR	LV	TYPE	F
32B	+CV-				
32C	+0V-				

./.

```

*****
* WILLI STUDER AG * L C C A I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 39 *
*****
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
*****
ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION

```

```

ELM 8 1.861.857.00
CODEC CONTROL

```

PNT	SIGNAL NAME	CCLR	LV	TYPE	F
1A	+0V-				
1B	+0V-				
1C	+0V-				
2A	+0V-				
2B	+0V-				
2C	+0V-				
3A	+0V-				
3B	+0V-				
3C	+0V-				
4A	CCAL0				
4B	CCAL1				
4C	CCAL2				
5A	+5V-				
5B	+5V-				
5C	+5V-				
6A	+5V-				
6B	+5V-				
6C	+5V-				
7A	CCAL3				
7B	CCAL4				
7C	CCAL5				
8A	CCAL6				
8B	CCAL7				
8C	CCAL8				
9A	CCAH1				
9B	CCAH2				
9C	CCAH3				
10A	CCAH4				
10B	CCAH5				
10C	CCAH6				
11A	CCAH7				
11B	CCAJDEC				
11C	CCPK-1				
12A	CC0				
12B	CC1				
12C	CC2				
13A	CC3				
13B	CC4				
13C	CC5				
14A	CC6				
14B	CC7				
14C	CC8				
15A	CC9				
15B	CC10				
15C	CC11				
16A	CC12				
16B	CC13				

./.

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION

```

```

ELM 8 1.861.857.00
<-- <-- <-- CONTINUATION

```

PNT	SIGNAL NAME	CCLR	LV	TYPE	F
16C	CCCRC				
17A	DCD1CLK				
17B	DCD2CLK				
17C	DCJNET				
18A	CBUSCLK				
18B	CBUS1CLK				
18C	CBUSAD				
19A	CBUSIAD				
19B	CBUSCAT				
19C	CBUSIDAT				
20A	CCREPRO				
20B	CCADDRDE				
20C	CCENCIN				
21A	CCFBCLR				
21B	CLK5				
21C	CCWDERR				
22A	CK5				
22B	TCV-4				
22C	ISPLDET				
23A	CCIDIS				
23B	CCFMUT				
23C	CCFSPL				
24A	CCIGPASK				
24B	CCIPRSP				
24C	TCRCERR				
25A	CLK6				
25B	CLK7				
25C	CLK8				
26A	CLK9				
26B	CCRDERR				
26C	CCWRERR				
27A	+5V-				
27B	+5V-				
27C	+5V-				
28A	+5V-				
28B	+5V-				
28C	+5V-				
29A	CCIEC				
29B	CCIE1				
29C	CCBLCRC				
30A	+CV-				
30B	+CV-				
30C	+CV-				
31A	+0V-				
31B	+CV-				
31C	+CV-				
32A	+CV-				

./.

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION

```

```

ELM 8 1.861.857.00
<-- <-- <-- CONTINUATION

```

PNT	SIGNAL NAME	CCLR	LV	TYPE	F
32B	+0V-				
32C	+0V-				

./.

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 40 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00 GRP 1 1.861.885.00 GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

ELM 9 1.861.858.00 ELM 9 1.861.858.00 ELM 9 1.861.858.00
 CUDEC MEMORY <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+OV-					16C	CCRC					32B	+OV-				
1B	+OV-					17A	ISPLDET					32C	+OV-				
1C	+OV-					17B	CCIGMASK										
2A	+OV-					17C	CCICAVAL										
2B	+OV-					18A											
2C	+OV-					18B											
3A	+OV-					18C											
3B	+OV-					19A											
3C	+OV-					19B											
4A	CCAL0					19C											
4B	CCAL1					20A	CCREPRO										
4C	CCAL2					20B	CCADORDE										
5A	+5V-					20C	CCENCIN										
5B	+5V-					21A	CCFBCLR										
5C	+5V-					21B											
6A	+5V-					21C	CCWDERR										
6B	+5V-					22A	CK5										
6C	+5V-					22B	CCENDAP										
7A	CCAL3					22C	CCDAPDEC										
7B	CCAL4					23A	CCINVAL										
7C	CCAL5					23B	CCIDIS										
8A	CCAL6					23C	RES22										
8B	CCAL7					24A	TFORMENC										
8C	CCIR5					24B	TDECCASY										
9A	CCAH1					24C	CCIPRSPL										
9B	CCAH2					25A	CLK6										
9C	CCAH3					25B	CLK7										
10A	CCAH4					25C	CLK8										
10B	CCAH5					26A	CLK9										
10C	CCAH6					26B	CCRDERR										
11A	CCAH7					26C	CCWRERR										
11B	CCADEC					27A	+5V-										
11C	CCPR-1					27B	+5V-										
12A	CC0					27C	+5V-										
12B	CC1					28A	+5V-										
12C	CC2					28B	+5V-										
13A	CC3					28C	+5V-										
13B	CC4					29A	CCEEC										
13C	CC5					29B	CCEE1										
14A	CC6					29C	CCBLCRC										
14B	CC7					30A	+OV-										
14C	CCE1					30B	+OV-										
15A	CCE0					30C	+OV-										
15B	CCEGD					31A	+OV-										
15C	CCILV					31B	+OV-										
16A	CCQECD					31C	+OV-										
16B	CCQECMD					32A	+OV-										

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 41 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00 GRP 1 1.861.885.00 GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

ELM 10 1.861.859.00 ELM 10 1.861.859.00 ELM 10 1.861.859.00
 TRANSFORMATTER <-- <-- <-- CONTINUATION <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+OV-					16C	FB1W5					32B	+OV-				
1B	+OV-					17A	ADT0					32C	+OV-				
1C	+OV-					17B											
2A	+OV-					17C	ACT1										
2B	+OV-					18A	ACT2										
2C	+OV-					18B											
3A	+OV-					18C	ADT3										
3B	+OV-					19A	HI/LC										
3C	+OV-					19B	SECSYN										
4A	ITEST					19C											
4B	IEARR					20A	DINT										
4C						20B	ISYNC										
5A	+5V-					20C	IWRET										
5B	+5V-					21A	TFORMENC										
5C	+5V-					21B	TDECCASY										
6A	+5V-					21C	TCRCERR										
6B	+5V-					22A											
6C	+5V-					22B	TCY-4										
7A	WRCLK4					22C	ISPLDET										
7B	WRICLK4					23A											
7C	SLR					23B											
8A	WRDOUT					23C											
8B	WRIDOUT					24A											
8C	RTSYNC					24B											
9A	HRSYO					24C											
9B	WRISYO					25A	CLK1										
9C	ISYRT					25B	CLK4										
10A	TREFINT					25C	CLK5										
10B	TIFREINT					26A	CLK6										
10C	DSSY					26B	ICLK5										
11A						26C	ICLK6										
11B						27A	+5V-										
11C	RESHPG1					27B	+5V-										
12A	RESHPG2					27C	+5V-										
12B	TTWREMPH					28A	+5V-										
12C	TTREMPH					28B	+5V-										
13A	TTIXLOOP					28C	+5V-										
13B	TTREC					29A	BLSYN										
13C	SECSYN					29B											
14A	MO					29C	BLISYN										
14B	WL					30A	+OV-										
14C	F1					30B	+OV-										
15A	F2					30C	+OV-										
15B	F3					31A	+OV-										
15C	ITRAR					31B	+OV-										
16A	FBWS					31C	+OV-										
16B						32A	+OV-										

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 42 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
* 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION
  
```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION
  
```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION
  
```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION
  
```

```

ELM 11 1.861.860.00
RUN PROCESSOR
  
```

```

ELM 11 1.861.860.00
<-- <-- <-- CONTINUATION
  
```

```

ELM 11 1.861.860.00
<-- <-- <-- CONTINUATION
  
```

```

PNT SIGNAL NAME COLOR LV TYPE F
  
```

```

PNT SIGNAL NAME COLOR LV TYPE F
  
```

```

PNT SIGNAL NAME COLOR LV TYPE F
  
```

```

1A +0V-
1B +0V-
1C +0V-
2A +0V-
2B +0V-
2C +0V-
3A +0V-
3B +0V-
3C +0V-
4A
4B
4C
5A +5V-
5B +5V-
5C +5V-
6A +5V-
6B +5V-
6C +5V-
7A DTR1
7B DTR11
7C
8A DTR2
8B DTR12
8C
9A DTR3
9B DTR13
9C
10A DTR4
10B DTR14
10C
11A DTR5
11B DTR15
11C
12A DTR6
12B DTR16
12C
13A DTR7
13B DTR17
13C
14A DTR8
14B DTR18
14C
15A
15B
15C
16A
16B
  
```

```

16C
17A ADTC
17B
17C ACT1
18A ADT2
18B
18C
19A
19B RPTREND
19C LCTREND
20A DINT
20B ISYNC
20C IURET
21A
21B
21C
22A
22B
22C SYSCFS1
23A SYSCFS2
23B MVARI
23C TAPETYPE
24A CLK1
24B
24C
25A CLK6
25B
25C
26A
26B
26C
27A +5V-
27B +5V-
27C +5V-
28A +5V-
28B +5V-
28C +5V-
29A
29B
29C
30A +0V-
30B +0V-
30C +0V-
31A +0V-
31B +0V-
31C +0V-
32A +0V-
  
```

```

32B +0V-
32C +0V-
  
```

```

*****
* WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 43 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
* 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION
  
```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION
  
```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION
  
```

```

GRP 1 1.861.885.00
<-- <-- <-- CONTINUATION
  
```

```

ELM 12 1.861.861.00
RT/TC CODEC
  
```

```

ELM 12 1.861.861.00
<-- <-- <-- CONTINUATION
  
```

```

ELM 12 1.861.861.00
<-- <-- <-- CONTINUATION
  
```

```

PNT SIGNAL NAME COLOR LV TYPE F
  
```

```

PNT SIGNAL NAME COLOR LV TYPE F
  
```

```

PNT SIGNAL NAME COLOR LV TYPE F
  
```

```

1A +0V-
1B +0V-
1C +0V-
2A +0V-
2B +0V-
2C +0V-
3A +0V-
3B +0V-
3C +0V-
4A
4B
4C
5A +5V-
5B +5V-
5C +5V-
6A +5V-
6B +5V-
6C +5V-
7A TTIXLCPD
7B
7C
8A PBTR2
8B PBTR1
8C RTSYNC
9A WRTR2
9B WRTR1
9C ISYRT
10A PBTR1
10B PBTR1
10C DSSY
11A WRTR1
11B WRTR1
11C RESHPG1
12A RESHPG2
12B CLK5
12C TEST1
13A
13B
13C
14A -20
14B -20
14C -20
15A ANA-GND
15B ANA-GND
15C ANA-GND
16A TCIN
16B TCIN
  
```

```

16C
17A TCOUT
17B TCIOUT
17C
18A CBUSCLK
18B CBUSICK
18C CBUSAD
19A CBUSIAD
19B CBUSDAT
19C CBUSIDAT
20A +20
20B +20
20C +20
21A
21B
21C
22A RTOUT
22B RTIOLT
22C SYSCFS1
23A SYSCFS2
23B MVARI
23C TAPETYPE
24A
24B SLR
24C
25A
25B
25C
26A
26B
26C ICLK6
27A +5V-
27B +5V-
27C +5V-
28A +5V-
28B +5V-
28C +5V-
29A
29B
29C
30A +0V-
30B +0V-
30C +0V-
31A +0V-
31B +0V-
31C +0V-
32A +0V-
  
```

```

32B +0V-
32C +0V-
  
```

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 44 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION

ELM 13 1.861.862.00
 TIMING + TEST

ELM 13 1.861.862.00
 <-- <-- <-- CONTINUATION

ELM 13 1.861.862.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+0V-				
1B	+0V-				
1C	+0V-				
2A	+0V-				
2B	+0V-				
2C	+0V-				
3A	+0V-				
3B	+0V-				
3C	+0V-				
4A	SAMPCLK				
4B	SAMP1CLK				
4C	UDCHPRO				
5A	+5V-				
5B	+5V-				
5C	+5V-				
6A	+5V-				
6B	+5V-				
6C	+5V-				
7A	VCLKIN				
7B	GNDCKI				
7C	WDCKI				
8A	SYWDCKO				
8B	GNDCKO				
8C					
9A	VIDCLK				
9B	VID1CLK				
9C	RTSYNC				
1CA	WDIN				
1CB	WDIIN				
1CC					
11A	-20				
11B	-20				
11C	-20				
12A					
12B	TTWREMPH				
12C	TTRDEMPH				
13A	TTIXLGOP				
13B	TTREC				
13C	TRII				
14A	SYWDOUT				
14B	SYWDIGOUT				
14C					
15A	AESIN				
15B	AESIIN				
15C					
16A	TREFEXT				
16B	TIREFEXT				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C					
17A	2ECCLK				
17B	12ECCLK				
17C					
18A	CBUSCLK				
18B	CBUS1CLK				
18C	CBUSAC				
19A	CBUSIAD				
19B	CBUSCAT				
19C	CBUSICAT				
20A	H17LC				
20B	SECSTN				
20C					
21A	+20				
21B	+20				
21C	+20				
22A	PDCLK3				
22B	PD1CLK3				
22C					
23A	ITE2				
23B					
23C					
24A	CLK1				
24B	CLK4				
24C	CLK5				
25A	CLK6				
25B	CLK7				
25C	CLK8				
26A	CLK9				
26B	1CLK5				
26C	1CLK6				
27A	+5V-				
27B	+5V-				
27C	+5V-				
28A	+5V-				
28B	+5V-				
28C	+5V-				
29A					
29B					
29C					
30A	+0V-				
30B	+0V-				
30C	+0V-				
31A	+0V-				
31B	+0V-				
31C	+0V-				
32A	+0V-				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+0V-				
32C	+0V-				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 45 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00
 <-- <-- <-- CONTINUATION

ELM 14 1.861.763.00
 SYSTEM CONTROLLER 1

ELM 14 1.861.763.00
 <-- <-- <-- CONTINUATION

ELM 14 1.861.763.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+0V-				
1B	+0V-				
1C	+0V-				
2A	+0V-				
2B	+0V-				
2C	+0V-				
3A	+0V-				
3B	+0V-				
3C	+0V-				
4A	TSTSIFTD				
4B	TSTSIFRD				
4C					
5A	+5V-				
5B	+5V-				
5C	+5V-				
6A	+5V-				
6B	+5V-				
6C	+5V-				
7A	SSDACLK				
7B	SSDA1CLK				
7C					
8A	SSDAMTX				
8B	SSDAIMTX				
8C					
9A	SSDACTS				
9B	SSDAICTS				
9C					
1CA	SSJADTR				
10B	SSDAIDTR				
10C					
11A	SSDAMRX				
11B	SSDAIMRX				
11C					
12A	P-DATA0				
12B	P-DATA1				
12C	P-DATA2				
13A	P-DATA3				
13B	P-DATA4				
13C	P-DATA5				
14A	P-DATA6				
14B	P-DATA7				
14C					
15A	P-EN				
15B	P-EN				
15C	P-EN				
16A	P-INMI				
16B	PWRUK				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
16C	P-IN2				
17A	P-GU11				
17B	P-OUT2				
17C					
18A	CBUSCLK				
18B	CBUS1CLK				
18C	CBUSAD				
19A	CBUSIAD				
19B	CBUSCAT				
19C	CBUSICAT				
20A	P-ADDR00				
20B	P-ADDR01				
20C	P-ADDR02				
21A	P-ADDR03				
21B	P-ADDR04				
21C	P-ADDR05				
22A	P-ADDR06				
22B	P-ADDR07				
22C	P-ADDR08				
23A	P-ADDR09				
23B	P-ADDR10				
23C	P-ADDR11				
24A	P-ISEL0				
24B	P-ISEL1				
24C	P-ISEL2				
25A	P-ISEL3				
25B	K-PWRUP				
25C					
26A	+20				
26B	+20PC				
26C					
27A	+5V-				
27B	+5V-				
27C	+5V-				
28A	+5V-				
28B	+5V-				
28C	+5V-				
29A	-20				
29B					
29C					
30A	+0V-				
30B	+0V-				
30C	+0V-				
31A	+0V-				
31B	+0V-				
31C	+0V-				
32A	+0V-				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
32B	+0V-				
32C	+0V-				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/CR * 10:54 * P A G E 46 *

 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1	1.861.885.00	GRP 1	1.861.885.00	GRP 1	1.861.885.00
<-- <-- <-- CONTINUATION		<-- <-- <-- CONTINUATION		<-- <-- <-- CONTINUATION	
ELM 15	1.861.763.00	ELM 15	1.861.763.00	ELM 15	1.861.763.00
SYSTEM CONTROLLER 2		CONTINUATION		CONTINUATION	
PNT SIGNAL NAME	COLOR LV TYPE	F	PNT SIGNAL NAME	COLOR LV TYPE	F
1A +0V-			16C P-IN2		
1B +0V-			17A P-OUT12		
1C +0V-			17B P-OUT22		
2A +0V-			17C		
2B +0V-			18A CBUSCLK		
2C +0V-			18B CBUSICLK		
3A +0V-			18C CBUSAD		
3B +0V-			19A CBUSAD		
3C +0V-			19B CBUSCAT		
4A TSTSIFTD			19C CBUSICAT		
4B TSTSIFRD			20A P-ADDR2C		
4C			20B P-ADDR21		
5A +5V-			20C P-ADDR22		
5B +5V-			21A P-ADDR23		
5C +5V-			21B P-ADDR24		
6A +5V-			21C P-ADDR25		
6B +5V-			22A P-ADDR26		
6C +5V-			22B P-ADDR27		
7A SSACLK			22C P-ADDR28		
7B SSJAI CLK			23A P-ADDR29		
7C			23B P-ADDR30		
8A SSAMTX			23C P-ADDR31		
8B SSAMTX			24A P-ISEL02		
8C			24B P-ISEL12		
9A SSJACTS			24C P-ISEL22		
9B SSJACTS			25A P-ISEL32		
9C			25B K-PWRUP		
10A SSALTR			25C		
10B SSJAI DTR			26A +2C		
10C			26B +20PC		
11A SSAMRX			26C		
11B SSJAI MRX			27A +5V-		
11C			27B +5V-		
12A P-JATA02			27C +5V-		
12B P-DATA12			28A +5V-		
12C P-JATA22			28B +5V-		
13A P-DATA32			28C +5V-		
13B P-JATA42			29A -20		
13C P-JATA52			29B		
14A P-DATA62			29C		
14B P-DATA72			30A +0V-		
14C			30B +0V-		
15A P-EN2			30C +0V-		
15B P-W2			31A +0V-		
15C P-IRE52			31B +0V-		
16A P-INM12			31C +0V-		
16B PWRUK			32A +0V-		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 47 *

 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1	1.861.885.00	GRP 1	1.861.885.00	GRP 1	1.861.885.00
<-- <-- <-- CONTINUATION		<-- <-- <-- CONTINUATION		<-- <-- <-- CONTINUATION	
ELM 17	CONNECTOR 2 (BACKPANEL RACK 1)	ELM 18	CONNECTOR 3 (BACKPANEL RACK 3)	ELM 19	CONNECTOR 4 (TC+AES+RNC)
PNT SIGNAL NAME	COLOR LV TYPE	F	PNT SIGNAL NAME	COLOR LV TYPE	F
1 DACOUT1			1 BLSYN		
2 DACOUT2			2 WRICLK4		
3 PDIBCLK			3 WRIDOUT		
4 PDWCLK			4 WRISYO		
5 PDIDATA			5 DTRI8		
6 TREFINT			6 DTRI7		
7 TREFEXT			7 DTRI6		
8 WRITR1			8 DTRI5		
9 WRITR2			9 DTRI4		
10 PBTR1			10 DTRI3		
11 PBTR2			11 DTRI2		
12 PDICLK3			12 DTRI1		
13 PDCLK3			13		
14 GNDDAC1			14 BLSYN		
15 GNDDAC2			15 WRCLK4		
16 PD3CLK			16 WRDOLT		
17 PDWCLK			17 WRSYO		
18 PDIDATA			18 DTR8		
19 TREFINT			19 DTR7		
20 TREFEXT			20 DTR6		
21 WRTR1			21 DTR5		
22 WRTR2			22 DTR4		
23 PBTR1			23 DTR3		
24 PBTR2			24 DTR2		
25 K-PWRUP			25 DTR1		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/CR * 10:54 * PAGE 48 *
 * 1.861.022.JC D820X PCM RECCORDER * 86/08/27 - CO *
 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION					GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION					GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION							
ELM 20 1.861.885.00 CONNECTOR 5 (TC+EXT CLK)					ELM 21 1.861.885.00 CONNECTOR 6 (TERMINAL)					ELM 22 1.861.885.00 CONNECTOR 7 (BACKPANFL RACK 2)							
PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	SYWDIOUT					1	TSTSIFRD					1	SSDAICLK				
2	WDIIN					2	TSTSIFRD					2	SSDAIDTR				
3	VIDICLK					3	TSTSIFTD					3	SSDAIMTX				
4	TCIOUT					4						4	SSDAIMRX				
5	TCIIN					5						5	SSDAICTS				
6	RTIOUT					6						6	CBUSICLK				
7						7	+CV-					7	CBUSIAD				
8						8						8	CBUSICAT				
9						9						9					
10						10						10	+0V-				
11						11						11	+0V-				
12						12						12	+0V-				
13						13						13	+0V-				
14	SYWDIOUT					14						14	SSDAICLK				
15	WDIIN					15						15	SSDAIDTR				
16	VIDICLK					16						16	SSDAMTX				
17	TCIOUT					17						17	SSDAMRX				
18	TCIIN					18						18	SSDAICTS				
19	RTIOUT					19						19	CBUSICLK				
20						20						20	CBUSIAD				
21						21						21	CBUSIDAT				
22						22						22	+20PC				
23						23						23	+20PC				
24						24						24	+20PC				
25						25						25	+20PC				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * PAGE 49 *
 * 1.861.022.00 D820X PCM RECCORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BOX <-- <-- <-- CONTINUATION

GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION					GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION					GRP 1 1.861.885.00 <-- <-- <-- CONTINUATION							
ELM 23 1.861.515.00 POWER SUPPLY					ELM 23 1.861.515.00 <-- <-- <-- CONTINUATION					ELM 51 BOX-RACK 2 CONNECTOR (CABLE)							
PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
2A	+0V-					32C	+0V-					1	SSDAICLK				
2B	+0V-											2	SSDAIDTR				
2C	+0V-											3	SSDAIMTX				
4A	+0V-											4	SSDAIMRX				
4B	+0V-											5	SSDAICTS				
4C	+0V-											6	CBUSICLK				
6A	+5V-											7	CBUSIAD				
6B	+5V-											8	CBUSIDAT				
6C	+5V-											9					
8A	+5V-					1	DACOLT1					10	+0V-				
8B	+5V-					2	DACOLT2					11	+0V-				
8C	+5V-					3	PDIBCLK					12	+0V-				
10A	K-PWRUP					4	PDICLK					13	+0V-				
10B	SAMPCLK					5	PDIDATA					14	SSDAICLK				
10C	SAMPICLK					6	TREFINT					15	SSDADTR				
12A	PWRCK					7	TREFEXT					16	SSDAMTX				
12B						8	WRTR1					17	SSDAMRX				
12C	FANOUT					9	WRTR2					18	SSDAICTS				
14A	+20PC					10	PBTR1					19	CBUSICLK				
14B	+20PC					11	PBTR2					20	CBUSIAD				
14C	+20PC					12	PDICLK3					21	CBUSIDAT				
16A	+0V-					13	PDCLK3					22	+20PC				
16B	+0V-					14	GNDGAC1					23	+20PC				
16C	+0V-					15	GNDGAC2					24	+20PC				
18A	-2J					16	PDCLK					25	+20PC				
18B	-2J					17	PDWCLK										
18C	-2J					18	PDATA										
20A	ANA-GND					19	TREFINT										
20B	ANA-GND					20	TREFEXT										
20C	ANA-GND					21	WRTR1										
22A	+2J					22	WRTR2										
22B	+2J					23	PBTR1										
22C	+2J					24	PBTR2										
24A	ANA-GND					25	K-PWRUP										
24B	ANA-GND																
24C	ANA-GND																
26A	+5V-																
26B	+5V-																
26C	+5V-																
28A	+5V-																
28B	+5V-																
28C	+5V-																
30A	+0V-																
30B	+0V-																
30C	+0V-																
32A	+0V-																
32B	+0V-																

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * PAGE 50 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BCK <-- <-- <-- CONTINUATION

GRP 1	1.861.885.00	GRP 2	1.861.775.00	GRP 2	1.861.775.00
<-- <-- <-- CONTINUATION		ANALCG I/O		<-- <-- <-- CONTINUATION	
ELM 52	BUX-RACK 3 CONNECTOR (CABLE)	ELM 1	CHANNEL 2 OUTPUT (XLR)	ELM 22	CHANNEL 2 I/O (CABLE) (CIS)
PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE
1 BLSYN		1 GNDCLT-2		1	
2 WRCLK4		2 ANACL-2		2 GNDIN-2	
3 WRIDOUT		3 ANAICUT2		3 ANAIN-2	
4 WRISYO				4 ANAIIN-2	
5 DTR18		ELM 2	CHANNEL 2 INPUT (XLR)	5 GNDOUT-2	
6 DTR17		PNT SIGNAL NAME	COLOR LV TYPE	6 ANAOUT-2	
7 DTR16		1 GNDIN-2		7 ANAIOUT2	
8 DTR15		2 ANAIN-2			
9 DTR14		3 ANAIIN-2			
10 DTR13					
11 DTR12		ELM 3	CHANNEL 1 OUTPUT (XLR)		
12 DTR11		PNT SIGNAL NAME	COLOR LV TYPE		
13		1 GNDOUT-1			
14 BLSYN		2 ANACL-1			
15 WRCLK4		3 ANAICUT1			
16 WRIDOUT					
17 WRISYO		ELM 4	CHANNEL 1 INPUT (XLR)		
18 DTR8		PNT SIGNAL NAME	COLOR LV TYPE		
19 DTR7		1 GNDIN-1			
20 DTR6		2 ANAIN-1			
21 DTR5		3 ANAIIN-1			
22 DTR4					
23 DTR3		ELM 21	CHANNEL 1 I/O (CABLE) (CIS)		
24 DTR2		PNT SIGNAL NAME	COLOR LV TYPE		
25 DTR1		1			
		2 GNDIN-1			
		3 ANAIN-1			
		4 ANAIIN-1			
		5 GNDOUT-1			
		6 ANACL-1			
		7 ANAICUT1			

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * PAGE 51 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS BCK <-- <-- <-- CONTINUATION

GRP 3	DI/DD/TC/RT/CLOCK/TEST/BNC	GRP 3	<-- <-- <-- CONTINUATION	GRP 3	<-- <-- <-- CONTINUATION
ELM 5	DIGITAL OUTPUT (DO) (XLR)	ELM 10	TIME CODE I/O BOARD (CIS)	ELM 12	TEST (TERMINAL) (RS232)
PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE	PNT SIGNAL NAME	COLOR LV TYPE
1 AESGND0		1		1	
2 AESO1		2 GNDTCIN		2 TSTSIFRD	
3 AESIO1		3 TCIN		3 TSTSIFD	
		4 TCIIIN		4	
ELM 6	DIGITAL INPUT (DI) (XLR)	5 GNDTCOUT		5	
PNT SIGNAL NAME	COLOR LV TYPE	6 TCOUT		6	
1 AESGNDI		7 TCIOU1		7 +0V-	
2 AESIN				8	
3 AESIIN		ELM 11	TC + EXTERNAL CLK CONNECTOR	9	
		PNT SIGNAL NAME	COLOR LV TYPE	10	
ELM 7	TC OUTPUT (XLR)	1 SYHDICUT		11	
PNT SIGNAL NAME	COLOR LV TYPE	2 WCIIN		12	
1 GNDTCOUT		3 VIDICLK		13	
2 TCOUT		4 TCIOU1		14	
3 TCIOU1		5 TCIIIN		15	
		6		16	
ELM 8	TC INPUT (XLR)	7		17	
PNT SIGNAL NAME	COLOR LV TYPE	8		18	
1 GNDTCIN		9		19	
2 TCIN		10		20	
3 TCIIIN		11		21	
		12		22	
ELM 9	RT OUTPUT (XLR)	13		23	
PNT SIGNAL NAME	COLOR LV TYPE	14 SYWCCUT		24	
1 GROUND		15 WDIIN		25	
2 RTOUT		16 VIDCLK			
3 RTIOU1		17 TCOUT			
		18 TCIN			
		19			
		20			
		21			
		22			
		23			
		24			
		25			

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 52 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 4 1.861.320.00 ELECTRONICS ECK <-- <-- <-- CONTINUATION

GRP 3 <-- <-- <-- CONTINUATION

ELM 15 1.861.022.00
 VIDEO CLOCK INPUT (BNC)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	VCLKIN				
2	GNDCKI				

ELM 23 1.861.775.00
 DIGITAL I/O (CIS)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AESGNDI				
2	AESIN				
3	AESIIN				
4	AESGNDI				
5	AESQI				
6	AESIUI				

ELM 24 1.861.771.00
 TC TRANSFORMATOR (CIS)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	GNDTLIN				
2	TCIN				
3	TCIIN				
4	GNDTGGUT				
5	TCOUT				
6	TCIOUT				

ELM 25 REFERENCE TIME I/O (CIS)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	GROUND				
2					
3					
4					
5	GROUND				
6	RTOUT				
7	RTIOUT				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 53 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 5 1.050.111.00 HEADBLOCK TYPE S

GRP 1 1.116.861.20
 READ HEAD

ELM 2 1.116.861.20
 READ HEAD INTERCONNECTION (FLEXI)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	RDHD211				
2	RDHD212				
3	RDHD209				
4	RDHD210				
5	RDHD207				
6	RDHD208				
7	RDHD205				
8	RDHD206				
9	RDHD203				
10	RDHD204				
11	RDHD201				
12	RDHD202				
13	RDHD111				
14	RDHD112				
15	RDHD109				
16	RDHD110				
17	RDHD107				
18	RDHD108				
19	RDHD105				
20	RDHD106				
21	RDHD103				
22	RDHD104				
23	RDHD101				
24	RDHD102				

GRP 2 1.116.861.10
 WRITE HEAD

ELM 1 1.116.861.10
 HEADBLOCK CONNECTOR WRITE (P4)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	WRTO11				
2	WRTO12				
3	WRTO21				
4	WRTO22				
5	WRTO31				
6	WRTO32				
7	WRTO41				
8	WRTO42				
9	WRTO51				
10	WRTO52				
11	WRTO61				
12	WRTO62				
13	WRTO71				
14	WRTO72				
15	WRTO81				
16	WRTO82				
17	WRTO91				
18	WRTO92				
19	WRTO101				
20	WRTO102				
21					
22					
23	WRTO111				
24	WRTO112				
25	WRTO121				
26	WRTO122				

GRP 3 1.861.805.00
 HEAD PREAMPLIFIR

ELM 1 1.861.805.00
 HEAD-AMPLIFIER CONNECTOR (D-SUB 25)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	HDTR5				
2	HDTR9				
3	HDTR7				
4	HDTR3				
5	HDTR4				
6	HDTR8				
7	HDTR10				
8	HDTR6				
9	HDTR1				
10	HDTR11				
11	HDTR12				
12	HDTR2				
13	+10				
14	+10				
15	+10				
16	+10				
17	+10				
18	+0.0				
19	+0.0				
20	+0.0				
21	+0.0				
22	-10				
23	-10				
24	-10				
25	-10				

ELM 2 1.861.805.00
 CONNECTOR EVEN TRACKS (AMP12)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	RHD201				
2	RHD202				
3	RHD203				
4	RHD204				
5	RHD205				
6	RHD206				
7	RHD207				
8	RHD208				
9	RHD209				
10	RHD210				
11	RHD211				
12	RHD212				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 54 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 5 1.861.011.00 HEADBLOCK TYPE 5 <-- <-- <-- CONTINUATION

GRP 3 1.861.805.00
 <-- <-- <-- CONTINUATION

ELM 3 1.861.805.00
 CONNECTOR 000 TRACKS (AMP12)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	RDHD101				
2	RDHD102				
3	RDHD103				
4	RDHD104				
5	RDHD105				
6	RDHD106				
7	RDHD107				
8	RDHD108				
9	RDHD109				
10	RDHD110				
11	RDHD111				
12	RDHD112				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 55 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D82GX

GRP 1 54.04.0111
 POWER INPUT

ELM 1
 POWER CONNECTOR P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	LINE1	1	J		
2	LINE2	6	J		
3	GND	5-4	J		

GRP 2
 EARTH CONNECTORS

ELM 1
 EARTH CONTACT

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	GND	5-4	J		

ELM 2
 EARTH CONTACT

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	GND	4	J		

ELM 3 1.010.001.53
 EARTH CONTACT

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	GND				

GRP 3 55.12.0001
 POWER SWITCH

ELM 1
 POWER SWITCH

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	LINE1	1	J		
2	LINE2	6	J		
3	S-LINE1	1	J		
4	S-LINE2	6	J		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 56 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D82GX <-- <-- <-- CONTINUATION

GRP 4 1.180.337.00
 LINE FILTER

ELM 1
 LINE FILTER

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	S-LINE1	1	Y		
2	S-LINE1	0	L		
3					
4	LINE1	1	Y		
5	LINE1	1	Y		
6					
7					
8	SF-LINE1	1	Y		
9	SF-LINE1	8	L		
10	SF-LINE1	1	Y		
11	GND	4	Y		
12	S-LINE2	0	L		
13					
14	LINE2	6	Y		
15	LINE2	6	Y		
16	S-LINE2	6	Y		
17					
18					
19	SF-LINE2	8	L		
20	SF-LINE2	4	Y		
21	SF-LINE2	8	Y		

GRP 5
 FUSES (LINE)

ELM 1 53.03.0106
 FUSE HOLDER, F01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	SF-LINE1	1	L		
2	PRIMV-2	1	L		

ELM 2 53.03.0106
 FUSE HOLDER, F02

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	SF-LINE1	1	L		
2	PRIMV-2	1	L		

GRP 6
 DISTRIBUTOR

ELM 1
 DISTRIBUTOR

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	PRIMV-2	1	K		
1B					
1C	PRIMV-2	1	K		
1D	PRIMV-2	1	K		
2A	PRIMV-3	2	K		
2B					
2C	PRIMV-3	2	K		
2D	PRIMV-3	2	K		
3A	PRIMV-5	3	K		
3B					
3C	PRIMV-5	3	K		
3D	PRIMV-5	3	K		
4A	SF-LINE2	4	K		
4B					
4C	SF-LINE2	4	K		
4D	SF-LINE2	4	K		
5A	PRIMV-2	5	K		
5B					
5C	PRIMV-2	5	K		
5D	PRIMV-2	5	K		
6A	PRIMV-3	6	K		
6B					
6C	PRIMV-3	6	K		
6D	PRIMV-3	6	K		
7A	PRIMV-5	7	K		
7B					
7C	PRIMV-5	7	K		
7D	PRIMV-5	7	K		
8A	SF-LINE2	8	K		
8B					
8C	SF-LINE2	8	K		
8D	SF-LINE2	8	K		

 * WILLI STUDER AG * L C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 57 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 7 55.12.0001
 VOLTAGE SELECTOR SC1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	PRIMV-2	1	J		
2	PRIMV-3	2	J		
3	PRIMV-5	3	J		
4	SF-LINE2	4	J		

ELM 2 55.12.0001
 VOLTAGE SELECTOR SC2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	PRIMV-3	2	J		
2	PRIMV-3	6	J		
3	PRIMV-5	3	J		
4	PRIMV-5	7	J		

ELM 3 55.12.0001
 VOLTAGE SELECTOR SC3

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	PRIMV-2	5	J		
2	PRIMV-3	6	J		
3	PRIMV-5	7	J		
4	SF-LINE2	8	J		

GRP 8 1.820.520.00
 MAIN TRANSFORMER (SPOOLING MOTORS)

ELM 1 1.820.521.00
 PRIMARY 1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	PRIMV-1	0	Y		
2	PRIMV-2	5	Y		
3	PRIMV-3	6	Y		
4	PRIMV-1	0	Y		

ELM 2 1.820.522.00
 PRIMARY 2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
5	PRIMV-5	7	Y		
6	PRIMV-6	0	Y		
7	PRIMV-6	0	Y		
8	SF-LINE2	8	Y		

ELM 3 1.820.523.00
 SECONDARY 1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
9	ACPWM-A6	6	Y		
10	ACPWM-A5	5	Y		
11	ACPWM-A4	4	Y		
12	ACPWM-A3	3	Y		
13	ACPWM-A2	2	Y		
14	ACPWM-A1	1	Y		
15	ACPWM-C1	0	Y		
16	ACPWM-C2	0	Y		
17	ACPWM-C3	0	Y		
18	ACPWM-C4	0	Y		
19	ACPWM-C5	0	Y		
20	ACPWM-C6	0	Y		

GRP 8 1.820.520.00
 <-- <-- <-- CONTINUATION

ELM 4 1.820.524.00
 SECONDARY 2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
9	ACPWM-C6	0	Y		
10	ACPWM-C5	0	Y		
11	ACPWM-C4	0	Y		
12	ACPWM-C3	0	Y		
13	ACPWM-C2	0	Y		
14	ACPWM-C1	0	Y		
15	ACPWM-B1	9	Y		
16	ACPWM-B2	9	Y		
17	ACPWM-B3	9	Y		
18	ACPWM-B4	9	Y		
19	ACPWM-B5	9	Y		
20	ACPWM-B6	9	Y		

ELM 5 CONNECTOR TO SPOOLING MOTOR SUPPLY

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	ACPWM-A1	1	M		
2	ACPWM-A2	2	M		
3	ACPWM-A3	3	M		
4	ACPWM-A4	4	M		
5	ACPWM-A5	5	M		
6	ACPWM-A6	6	M		
7	ACPWM-B1	9	F		
8	ACPWM-B2	9	F		
9	ACPWM-B3	9	F		
10	ACPWM-B4	9	F		
11	ACPWM-B5	9	F		
12	ACPWM-B6	9	F		

./.

 * WILLI STUDER AG * L C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 58 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 9 1.820.520.00
 MAIN TRANSFORMER

ELM 1 1.820.521.00
 PRIMARY 1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	PRIMV-1	0	Y		
2	PRIMV-2	1	Y		
3	PRIMV-3	2	Y		
4	PRIMV-1	0	Y		

ELM 2 1.820.522.00
 PRIMARY 2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
5	PRIMV-5	3	Y		
6	PRIMV-6	0	Y		
7	PRIMV-6	0	Y		
8	SF-LINE2	4	Y		

ELM 3 1.820.523.00
 SECONDARY 1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
9	ACPWE-A6	7	Y		
10	ACPWE-A5	1	Y		
11	ACPWE-A4	1	Y		
12	ACPWE-A3	6	Y		
13	ACPWE-A2	6	Y		
14	ACPWE-A1	0	Y		
15	ACPWE-C1	0	Y		
16	ACPWE-C2	0	Y		
17	ACPWE-C3	0	Y		
18	ACPWE-C4	0	Y		
19	ACPWE-C5	0	Y		
20	ACPWE-C6	0	Y		

./.

GRP 9 1.820.520.00
 <-- <-- <-- CONTINUATION

ELM 4 1.820.524.00
 SECONDARY 2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
9	ACPWE-C6	0	Y		
10	ACPWE-C5	0	Y		
11	ACPWE-C4	0	Y		
12	ACPWE-C3	0	Y		
13	ACPWE-C2	0	Y		
14	ACPWE-C1	0	Y		
15	ACPWE-B1	5	Y		
16	ACPWE-B2	5	Y		
17	ACPWE-B3	5	Y		
18	ACPWE-B4	4	Y		
19	ACPWE-B5	4	Y		
20	ACPWE-B6	0	Y		

GRP 10
 FUSES (SECONDARY)

ELM 1 FUSE 53.03.C106 F01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	ACPWE-A1	6	L		
2	ACPWE-D1	5	L		

ELM 2 FUSE 53.03.0106 F02

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	ACPWE-A4	1	L		
2	ACPWE-D4	5	L		

ELM 3 FUSE 53.03.0106 F03

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	ACPWE-A6	7	L		
2	ACPWE-D6	8	L		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 59 *

 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 11
RECTIFIERS

ELM	1	70.01.0231	DZ01
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	ACPWE-D1	9 L	
2	ACPWE-B1	5 L	
3	+STABIN	2 L	
4	+0.0	0 L	

ELM	2	70.01.0231	DZ02
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	ACPWE-D6	5 L	
2	ACPWE-B4	4 L	
3	+J.J	0 L	
4	-STABIN	6 L	

ELM	3	70.01.0231	DZ03
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	ACPWE-D6	8 L	
2	ACPWE-B6	0 L	
3	+CAPMOT	2 L	
4	OCAPMOT	4 L	

GRP 11
DISTRIBUTOR <-- <-- <-- CONTINUATION

ELM	4	52.01.0101	
PNT	SIGNAL NAME	COLOR LV TYPE	F
1A	ACPWE-A1	6 K	
1B	ACPWE-A1	6 K	
1C	ACPWE-A3	6 K	
1D	ACPWE-A2	6 K	
2A	ACPWE-C1	9 K	
2B	ACPWE-D1	9 K	
2C	ACPWE-D1	9 K	
2D			
3A	ACPWE-B1	5 K	
3B	ACPWE-B2	5 K	
3C	ACPWE-B1	5 K	
3D	ACPWE-B1	5 K	
4A			
4B	ACPWE-B1	5 K	
4C	ACPWE-B1	5 K	
4D	ACPWE-B3	5 K	
5A	ACPWE-A4	1 K	
5B	ACPWE-A4	1 K	
5C			
5D	ACPWE-A5	1 K	
6A	ACPWE-B5	4 K	
6B			
6C	ACPWE-B4	4 K	
6D	ACPWE-B4	4 K	

GRP 12
CAPACITORS

ELM	1	55.26.7103	C01
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	+STABIN	2 L	
2	+0.0	0 L	

ELM	2	59.26.7103	C02
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	+STABIN	2 L	
2	+0.0	0 L	

ELM	3	55.26.7103	C03
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	+0.0	0 L	
2	-STABIN	6 L	

ELM	4	55.26.7103	C04
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	+CAPMOT	2 L	
2	OCAPMOT	4 L	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 60 *

 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 12
<-- <-- <-- CONTINUATION

ELM	5		PO1
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	+STABIN	2 M	
2	+J.J	0 M	
3	+0.0	0 M	
4	+STABIN	2 M	
5	+J.J	0 M	
6	-STABIN	6 M	
7	+CAPMOT	2 M	
8			
9	OCAPMOT	4 M	
10	ACPWE-D1	9 M	
11			
12	ACPWE-B1	5 M	

GRP 18
SUPPLY CABLE, SPOOLING MOTORS <-- <-- <-- CONTINUATION

ELM	1	1.820.592.00	JO1
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	+PSVTMOT	2 F	
2	+PSVTMOT	2 F	
3	+PSVTMOT	2 F	
4	+PSVTMOT	2 F	
5	+PSVTMOT	2 F	
6	+PSVTMOT	2 F	
7	+PSVTMOT	2 F	
8	+PSVTMOT	2 F	
9	-PSVTMOT	6 F	
10	-PSVTMOT	6 F	
11	-PSVTMOT	6 F	
12	-PSVTMOT	6 F	
13	-PSVTMOT	6 F	
14	-PSVTMOT	6 F	
15	-PSVTMOT	6 F	
16	-PSVTMOT	6 F	
17		1 F	
18		1 F	
19		3 F	
20		3 F	
21	+0.0	4 F	
22	+0.0	4 F	
23		5 F	
24		5 F	

GRP 18
1.820.592.00 <-- <-- <-- CONTINUATION

ELM	3		PO2
PNT	SIGNAL NAME	COLOR LV TYPE	F
1	-PSVTMOT	6 F	
2	-PSVTMOT	6 F	
3	+PSVTMOT	2 F	
4		3 F	
5	-PSVTMOT	6 F	
6	+PSVTMOT	2 F	
7	+0.0	4 F	
8	-PSVTMOT	6 F	
9	+PSVTMOT	2 F	
10		5 F	
11	-PSVTMOT	6 F	
12	+PSVTMOT	2 F	

GRP 18
1.820.592.00 <-- <-- <-- CONTINUATION

ELM	2	TC GRP33, ELMC1	PO1
PNT	SIGNAL NAME	COLOR LV TYPE	F
1		1 F	
2	-PSVTMOT	6 F	
3	+PSVTMOT	2 F	
4		3 F	
5	-PSVTMOT	6 F	
6	+PSVTMOT	2 F	
7	+0.0	4 F	
8	-PSVTMOT	6 F	
9	+PSVTMOT	2 F	
10		5 F	
11	-PSVTMOT	6 F	
12	+PSVTMOT	2 F	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 61 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 19 1.820.591.00
 SUPPLY CABLE, ELECTRONICS

GRP 19 1.820.591.00
 <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 BACKPANEL TAPE DECK

ELM 1				
FROM GRP32, ELM02 J01				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 5.0	3	F	
2	+ 5.0	3	F	
3	+5.0SENS	4	F	
4	TD-C76K	9	F	
5	+ 0.0	0	F	
6	+ 0.0	0	F	
7	T-PWRGN	5	F	
8	+ 0.0	0	F	
9	+ 0.0	0	F	
10	+ 0.0	0	F	
11	+15.0	2	F	
12	-15.0	6	F	
13	+ 0.0	0	F	
14	+ 0.0	0	F	
15	+24.0	7	F	
16	+REMSUP	8	F	
17	+STABSNS	3	F	
18	-STABSNS	5	F	
19	-26.0	9	F	
20	+26.0	1	F	
21	+ 0.0	0	F	
22	+0.0SENS	0	F	
23	QCAPMOT	4	F	
24	+LAPMOT	2	F	

ELM 2				
TC GRP21, ELM02 P01				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 5.6	3	M	
2	+ 5.6	3	M	
3	+5.6SENS	4	M	
4	TD-C76K	9	M	
5	+ 0.0	0	M	
6	+ 0.0	0	M	
7	T-PWRGN	5	M	
8	+ 0.0	0	M	
9	+ 0.0	0	M	
10	+ 0.0	0	M	
11	+15.0	2	M	
12	-15.0	6	M	
13	+ 0.0	0	M	
14	+ 0.0	0	M	
15	+24.0	7	M	
16	+REMSUP	8	M	
17	+STABSNS	3	M	
18	-STABSNS	5	M	
19	-26.0	9	M	
20	+26.0	1	M	
21	+ 0.0	0	M	
22	+0.0SENS	0	M	
23	QCAPMOT	4	M	
24	+CAPMOT	2	M	

ELM 1				
SPOOLING MOTOR DRIVE AMP. LFFT P01				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+15.0			
6	-15.0			
7	PWMP-L1			
8	PWMP-L2			
9	PWMP-H1			
10	PWMP-H2			
11	PWMP-L3			
12	PWMP-L4			
13	AN-ICLD			
14	PWMP-L5			
15	PWMP-L6			
16	+ 0.0			

ELM 2				
SPOOLING MOTOR DRIVE AMP. RIGHT P02				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+15.0			
6	-15.0			
7	PWMP-L1			
8	PWMP-L2			
9	PWMP-H1			
10	PWMP-H2			
11	PWMP-L3			
12	PWMP-L4			
13	AN-ICRE			
14	PWMP-L5			
15	PWMP-L6			
16	+ 0.0			

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 62 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 3				
CAPSTAN MOTOR DRIVE AMPLIFIER P03				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+15.0			
6	-15.0			
7	AN-CSPDC			
8	TD-TCM1			
9	+ 0.0			
10	TU-TCM2			
11	+ 0.0			
12	+ 0.0			
13	TC-CPREF			
14	TC-CAPDC			
15	TD-C76K			
16	+ 0.0			

ELM 5				
SPOOLING MOTOR SUPPLY P05				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+15.0			
6	-15.0			
7	TD-C307K			
8	TD-PWENB			
9	+YSUP			
10	-YSUP			
11				
12				
13				
14				
15				
16				

ELM 7				
TAPE LIFT MOTOR, LFFT P07				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+26.0			
6	-26.0			
7				
8				
9				
10				
11	TD-RALP1			
12	TD-RALC2			
13	TD-RALP2			
14	TD-RALC1			
15	TD-RALEN			
16				

ELM 4				
PAR. CONT. INT. SYNCHRONIZER P04				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+15.0			
6	-15.0			
7				
8	TC-TCDIR			
9	+ 0.0			
10	TC-TCMV			
11	+ 0.0			
12	T-REFINT			
13	TD-CAPSY			
14	TD-MVD1A			
15	TD-MVCLK			
16	+ 0.0			

ELM 6				
EXT. SENSORS P06				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+15.0			
6	-15.0			
7	TD-YTRSP			
8	TD-SHLD			
9	TD-TRSP			
10	TD-TRSPR			

ELM 8				
TAPE LIFT MOTOR, RIGHT P08				
PNT	SIGNAL NAME	COLOR	LV	TYPE
1	+ 0.0			
2	+ 0.0			
3	+ 5.6			
4	+ 5.6			
5	+26.0			
6	-26.0			
7				
8				
9				
10				
11	TD-RARP1			
12	TD-RARG2			
13	TD-RARP2			
14	TD-RARC1			
15	TD-RAREN			
16				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 63 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 9 TACHO SENSOR (SPOOLING M. LEFT) P09

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 3.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7	AN-RES1				
8	TD-TML2				
9	TD-TML1				
10					

ELM 10 TACHO SENSOR (SPOOLING M. RIGHT) P10

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 3.0				
2	+ 3.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7	AN-RES2				
8	TD-TMR2				
9	TD-TMR1				
10					

ELM 11 MOVE SENSOR P11

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 3.0				
2	+ 3.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7	AN-RES3				
8	TD-MOVE2				
9	TD-MOVE1				
10					

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 12 TAPE TENSION SENSOR, LEFT P12

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7					
8					
9	AN-TTL				
10					

ELM 13 TAPE TENSION SENSOR, RIGHT P13

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 3.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7					
8					
9	AN-TTR				
10					

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 14 FUSE FAILURE DETECTOR P14

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+CAPMOT				
2	+CAPMOT				
3					
4	+24.0				
5	-STABSNS				
6	T-SUPVON				
7	+STABSNS				
8	+STABSNS				
9	+ 5.6				
10	+ 5.6				
11	+ 0.0				
12	+ 0.0				
13	-15.0				
14	+15.0				
15	+26.0				
16	-26.0				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 64 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 15 DISPLAY DRIVER P15

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 3.0				
3	+ 5.6				
4	+ 5.6				
5	+24.0				
6	+24.0				
7	TM-DSL4				
8	TM-ISL4				
9	TM-DRES				
10	TM-IRE5				
11	TM-DRW				
12	TM-IRW				
13	TM-DENB				
14	TM-IENB				
15	TM-DADR2				
16	TM-IADR2				
17	TM-UADR1				
18	TM-IADR1				
19	TM-UADRO				
20	TM-IADRO				
21	TM-SHIR				
22	0.0 VCU				
23	TM-KGIR				
24	0.0 VCU				
25	TM-DATA7				
26	0.0 VCU				
27	TM-DATA6				
28	0.0 VCU				
29	TM-DATA5				
30	0.0 VCU				
31	TM-DATA4				
32	0.0 VCU				
33	TM-DATA3				
34	0.0 VCU				
35	TM-DATA2				
36	0.0 VCU				
37	TM-DATA1				
38	0.0 VCU				
39	TM-DATA0				
40	0.0 VCU				

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 16 PARALLEL REMOTE CONTROL P16

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.6				
4	+ 5.6				
5	+REMSUP				
6	+REMSUP				
7	TM-DSL5				
8	TM-ISL5				
9	TM-DRES				
10	TM-IRE5				
11	TM-DRW				
12	TM-IRW				
13	TM-DENB				
14	TM-IENB				
15	T-REFEXT				
16	0.0 VCU				
17	TC-TCMV				
18	TC-TCDIR				
19	TM-DADRC				
20	TM-IADRO				
21	TM-REMIR				
22	0.0 VCU				
23	TC-MVCLK				
24	TD-MVDIR				
25	TM-CATA7				
26	0.0 VCU				
27	TM-DATA6				
28	0.0 VCU				
29	TM-DATA5				
30	0.0 VCU				
31	TM-DATA4				
32	0.0 VCU				
33	TM-DATA3				
34	0.0 VCU				
35	TM-CATA2				
36	0.0 VCU				
37	TM-CATA1				
38	0.0 VCU				
39	TM-DATA0				
40	0.0 VCU				

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 17 TD HEAD BLOCK ASSEMBLY P17

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7	T-SADA				
8	T-SADB				
9	T-SADC				
10	T-READSL				
11	T-WRTSL				
12	T-DT-PP1				
13	T-DT-PP2				
14	T-DT-SJM				
15	T-DT-HP				
16	T-DT-RES				
17					
18					
19					
20	+ 0.0				
21					
22	+ 0.0				
23					
24	+24.0				
25	+ 0.0				
26	+ 0.0				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 65 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 18
 VU-METER PANEL, EXTERNAL P18

PNT	SIGNAL NAME	CCLOR	LV	TYPE	F
1	+ J.u				
2	+ J.u				
3	+ 5.u				
4	+ 5.u				
5	+15.u				
6	-15.0				
7	T-SADA				
8	T-SADB				
9	T-SADC				
10	T-READSL				
11	T-MRTSL				
12	T-DT-CH1				
13	T-DT-CH2				
14	T-DT-CH3				
15	T-DT-MP				
16	T-DT-RES				
17					
18					
19					
20	+ 0.u				
21	T-VARSPD				
22	+ J.u				
23					
24	+24.u				
25	+ J.u				
26	+ J.u				

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 15
 SOURCE SELECTOR P19

PNT	SIGNAL NAME	CCLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.C				
3	+ 5.u				
4	+ 5.u				
5	+15.0				
6	-15.0				
7	T-SADA				
8	T-SADB				
9	T-SADC				
10	T-READSL				
11	T-MRTSL				
12	T-DT-CH1				
13	T-DT-CH2				
14	T-DT-CH3				
15	T-DT-MP				
16	T-DT-RES				
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					

ELM 3C
 S5DA INT. SYNCHRONIZER P2C

PNT	SIGNAL NAME	CCLOR	LV	TYPE	F
1	GND				
2	TDS-CLK				
3	SYS-CTS				
4	SYS-RX				
5	SYS-CTR				
6	SYS-TX				
7					
8	GND				
9					
10					

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 31
 TD GRP25. ELM04/05 P21

PNT	SIGNAL NAME	CCLOR	LV	TYPF	F
1	FRNGND				
2	TRANSCM				
3	TRANSA				
4	TRANSR				
5	RECEIVB				
6	RECEIVA				
7	RECEIVCM				
8	FRNGND				
9	SPARE				
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					

ELM 32
 TD ASSY1. GR80. EL21 P24

PNT	SIGNAL NAME	CCLOR	LV	TYPF	F
1	+0.0				
2	TC-MVCLK				
3	+0.0				
4	TD-MVDIR				
5	+0.0				
6					
7	+0.0				
8	TREFINT				
9	+0.0				
10	TREFINT				
11	+0.0				
12	TREFFXT				
13	+0.0				
14	TIRFFXT				
15	+0.0				
16					
17	+0.0				
18					
19	+0.0				
20					
21	+0.0				
22					
23	+0.0				
24					
25	+0.0				
26					

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 66 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 33
 TU ASSY1. GR80. EL22 P25

PNT	SIGNAL NAME	CCLOR	LV	TYPE	F
1	+0.u				
2	TAU-KESA				
3	+0.u				
4	TAU-RESB				
5	+0.u				
6	TAU-RESC				
7	+0.u				
8	SSJACLK				
9	+0.u				
10	SSJAICLK				
11	+0.u				
12	SSJAMTX				
13	+0.u				
14	SSJAIMTX				
15	+0.u				
16	SSJAUTR				
17	+0.u				
18	SSJAIDTR				
19	+0.u				
20	SSJACTS				
21	+0.u				
22	SSDAICTS				
23	+0.u				
24	SSJAMRX				
25	+0.u				
26	SSDAIMRX				

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 34
 INT. SYNCHRONIZER P24

PNT	SIGNAL NAME	CCLOR	LV	TYPE	F
1	TC-SL3				
2	+ 0.C				
3	TC-SL4				
4	+ 0.0				
5	TC-IRQ				
6	+ 0.0				
7	TC-ENBG				
8	+ 0.C				
9	TC-RESMP				
10	+ J.u				
11	+ 0.C				
12	+ 0.C				
13	+ 0.C				
14	+ 0.0				
15	TC-Rx				
16	+ 0.0				
17	TC-ENB				
18	+ 0.C				
19	TC-ACR2				
20	+ 0.0				
21	TC-ADR1				
22	+ 0.C				
23	TC-ACRC				
24	+ 0.C				
25	TC-DATA7				
26	+ 0.0				
27	TC-DATA6				
28	+ 0.C				
29	TC-DATA5				
30	+ 0.C				
31	TC-DATA4				
32	+ 0.C				
33	TC-DATA3				
34	+ 0.0				
35	TC-DATA2				
36	+ 0.0				
37	TC-DATA1				
38	+ 0.0				
39	TC-DATA0				
40	+ 0.0				

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 40
 SPOOLING MOTOR DRIVER J01

PNT	SIGNAL NAME	CCLOR	LV	TYPF	F
1	AN-ICR				
2	AN-IRR				
3	AN-ICR				
4	AN-IRR				
5					
6					
7	PWNPR-H1				
8	PWNPR-L3				
9	AN-ICRD				
10	PWNPR-L6				
11					
12					
13					
14					
15	TD-PENRR				
16					
17	TD-C76K				
18	+15.0				
19	KEY				
20	+ 5.u				
21	+ 0.0				
22	-15.0				
23	TD-PENBL				
24					
25					
26	AN-ICL				
27	AN-IRL				
28	PWNPL-H1				
29	PWNPL-L3				
30	AN-ICLD				
31	PWNPL-L6				
32	PWNPL-L5				
33	PWNPL-L4				
34	PWNPL-H2				
35	PWNPL-L1				
36	PWNPR-L5				
37	PWNPR-L4				
38	PWNPR-H2				
39	PWNPR-L1				

 * WILLI STUDER AG * L O C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 67 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20	1.820.701.00	CONTINUATION	GRP 20	1.820.701.00	CONTINUATION	GRP 20	1.820.701.00	CONTINUATION			
ELM 41	1.820.764.00	JC2	ELM 42	1.820.727.00	J03	ELM 42	1.820.727.00	CONTINUATION			
CAPSTAN CONTROL UNIT			CAPSTAN INTERFACE								
PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	TD-TCM1					1A	TC-CDIR1				
2	TD-TCM2					1B	TC-TCM1				
3	TC-REFP					2A	TC-TCMVI				
4	TC-CAPDC					2B	TC-TCM2				
5	TC-TCMVI					3A	AN-CSPDC				
6	TC-CJIRI					3B	AN-CSPDC				
7	TD-CAPSY					4A					
8	TC-REF					4B	TC-REFP				
9	TC-INEX					5A	TC-TCMV				
10	TD-RESMP					5B	TC-TCMV				
11	TC-ENBG					6A	TC-TCDIR				
12						6B	TC-TCDIR				
13	TC-IRK					7A					
14	TC-EREF					7B					
15	TC-SL4					8A	TC-RESMP				
16	TC-SL3					8B	TC-ENBG				
17						9A	TC-IRC				
18	+15.0					9B					
19	KEY					10A					
20	+ 5.6					10B	TC-EREF				
21	+ 3.0					11A	TC-REF				
22	-15.0					11B	T-REFINT				
23	TC-SL2					12A	TC-INEX				
24	TC-SL1					12B	T-REFEXT				
25						13A	TC-SL1				
26	TD-CRES					13B	TD-IRK				
27	TC-RW					14A	TC-SL2				
28	TC-ENB					14B	TD-SL7				
29	TC-ADR2					15A	+15.0				
30	TC-ADR1					15B	+15.0				
31	TC-ADRO					16A	+ 5.6				
32	TC-DATA7					16B	+ 5.6				
33	TC-DATA6					17A	+ 0.0				
34	TC-DATA5					17B	+ 0.0				
35	TC-DATA4					18A	-15.0				
36	TC-DATA3					18B	-15.0				
37	TC-DATA2					19A					
38	TC-DATA1					19B	TD-RES				
39	TC-DATA0					20A	TC-RW				
						20B	TD-RW				
						21A	TC-ENB				
						21B	TD-ENB				
						22A	TC-ADR2				
						22B					
						23A	TC-ADR1				
						23B	TD-ADR1				
						24A	TC-ADRO				

 * WILLI STUDER AG * L O C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 68 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 2L	1.820.701.00	CONTINUATION	GRP 20	1.820.701.00	CONTINUATION	GRP 20	1.820.701.00	CONTINUATION			
ELM 43	1.820.762.00	JC4	ELM 43	1.820.762.00	CONTINUATION	ELM 44	1.820.761.00	J05			
TAPE DECK PERIPHERY CONTR.						TAPE DFCK COUNTER / TIMER					
PNT	SIGNAL NAME	COLOR	LV	TYPE	F	PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	TD-RALEN					24B	TD-ACRO				
1B	TD-RALC1					25A	T-IRES6				
2A	TD-RALP2					25B	TD-CATA7				
2B	TD-RALC2					26A	T-IRES7				
3A	TD-RALP1					26B	TC-DATA6				
3B	TD-RARP1					27A	OC-RES1				
4A	TD-MOVE					27B	TD-DATA5				
4B	TD-WAKP2					28A	OC-RES2				
5A	T-IRES2					28B	TD-DATA4				
5B	TD-RAKEN					29A	OC-RES3				
6A	TD-CRES					29B	TD-CATA3				
6B	TD-RARCL					30A	OC-RES4				
7A						30B	TD-DATA2				
7B	TD-RARC2					31A	K-BRAKEL				
8A	TD-SHLD					31B	TD-DATA1				
8B	T-IRES3					32A	K-BRAKER				
9A	TD-TRSP					32B	TD-DATA0				
9B	TD-HEACT										
10A	TD-PWENB										
10B	T-SUPVON										
11A	-YSUP					1	TD-TML1				
11B						2	TD-TML2				
12A	+YSUP					3	TD-TMR1				
12B						4	TD-TMR2				
13A						5					
13B						6	TD-ADR3				
14A						7	TD-MOVE1				
14B	TD-SL3					8	TD-MOVE2				
15A	+15.0					9	TD-ICRF1				
15B	+15.0					10					
16A	+ 5.6					11	TD-ICRF2				
16B	+ 5.6					12	TD-MVCLK				
17A	+ 3.0					13	TD-IRK				
17B	+ 3.0					14	TD-MVDIR				
18A	-15.0					15					
18B	-15.0					16	TD-ICRF3				
19A	T-IRES2					17	TD-ICRF4				
19B	TD-RES					18	+15.0				
20A	TD-PENBL					19	KEY				
20B	TD-RW					20	+ 5.6				
21A	TD-PENBR					21	+ 0.0				
21B	TD-ENB					22	-15.0				
22A	T-IRES3					23	TC-ICRES5				
22B	TD-ADR2					24					
23A	T-IRES4					25	TD-SL6				
23B	TD-ADR1					26	TD-RFS				
24A	T-IRES5					27	TD-RW				
						28	TD-FNR				
						29	TD-ADR2				
						30	TD-ADR1				
						31	TD-ADRO				
						32	TD-DATA7				
						33	TD-DATA6				
						34	TD-DATA5				
						35	TD-DATA4				
						36	TD-DATA3				
						37	TD-DATA2				
						38	TD-DATA1				
						39	TD-DATA0				

 * WILLI STUDER AG * L C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 69 *
 * 1.861.022.00 D820X PCM RECCORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00 <-- <-- <-- CONTINUATION

ELM 45 1.820.760.00 SPOOLING MOTOR CONTROLLER J06

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AN-TTL				
2	AN-TTR				
3	AN-TTL				
4	AN-TTR				
5					
6	AN-IRL				
7					
8	AN-IRR				
9					
10					
11					
12					
13					
14					
15					
16					
17					
18	+13.0				
19	KEY				
20	+ 5.6				
21	+ 0.0				
22	-15.0				
23	TD-SL4				
24					
25					
26	TD-RES				
27	TD-RW				
28	TD-ENB				
29	TD-ADR2				
30	TD-ADR1				
31	TD-ADR0				
32	TD-DATA7				
33	TD-DATA6				
34	TD-DATA5				
35	TD-DATA4				
36	TD-DATA3				
37	TD-DATA2				
38	TD-DATA1				
39	TD-DATA0				

GRP 20 1.820.701.00 <-- <-- <-- CONTINUATION

ELM 46 1.820.785.00 MP-UNIT TD CONTROL J07

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	TD-P14B				
2	TD-P15B				
3	TD-SL3				
4	TD-SL2				
5	TD-RESMP				
6	TD-ADR3				
7					
8	TD-P17B				
9	TD-NMI				
10	TD-RX				
11	TD-TX				
12	TD-P16B				
13	TD-IRQ				
14	T-PWRGN				
15	TD-SL7				
16	TD-C76K				
17					
18					
19	KEY				
20	+ 5.6				
21	+ 0.0				
22	TD-C3C7K				
23	TD-SL4				
24	TD-SL5				
25	TD-SL6				
26	TD-RESET				
27	TD-RW				
28	TD-ENB				
29	TD-ADR2				
30	TD-ADR1				
31	TD-ADR0				
32	TD-CATA7				
33	TD-CATA6				
34	TD-CATA5				
35	TD-CATA4				
36	TD-CATA3				
37	TD-CATA2				
38	TD-CATA1				
39	TD-CATA0				

GRP 20 1.820.701.00 <-- <-- <-- CONTINUATION

ELM 47 1.820.783.00 TAPE DECK SERIAL INTERFACE J08

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	AN-TTL				
2	AN-TTR				
3	AN-ICL				
4	AN-ICR				
5	AN-TTL				
6	AN-TTR				
7	AN-RES1				
8	AN-RES2				
9	AN-RES3				
10	AN-RES4				
11	TD-RESMP				
12	TD-IRQ				
13	TDS-RX				
14	TDS-TX				
15	TDS-MTR				
16	TDS-CTS				
17	TDS-CLK				
18	+15.0				
19	KEY				
20	+ 5.6				
21	+ 0.0				
22	-15.0				
23	TD-RFSET				
24	TD-ADR3				
25	TD-SL5				
26	TD-RES				
27	TD-RW				
28	TD-ENB				
29	TD-ADR2				
30	TD-ADR1				
31	TD-ADR0				
32	TD-DATA7				
33	TD-DATA6				
34	TD-DATA5				
35	TD-DATA4				
36	TD-DATA3				
37	TD-DATA2				
38	TD-DATA1				
39	TD-DATA0				

 * WILLI STUDER AG * L C C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 70 *
 * 1.861.022.00 D820X PCM RECCORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00 <-- <-- <-- CONTINUATION

ELM 48 1.820.753.00 MASTER SERIAL INTERFACE J09

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	TM-DSL4				
1B	TM-ISL4				
2A	TM-DSL5				
2B	TM-ISL5				
3A	TM-DRES				
3B	TM-IRRES				
4A	TM-DENB				
4B	TM-IRW				
5A	TM-DENB				
5B	TM-IRW				
6A	TM-OADR2				
6B	TM-IADR2				
7A	TM-DADR1				
7B	TM-IADR1				
8A	TM-DADR0				
8B	TM-IADR0				
9A	TM-SL4				
9B	TM-SL5				
10A	TDS-RX				
10B	TDS-TX				
11A	TDS-DTR				
11B	TDS-CTS				
12A	SYS-RX				
12B	SYS-TX				
13A	SYS-DTR				
13B	SYS-CTS				
14A	TM-SHIR				
14B	TM-KBIR				
15A	+15.0				
15B	+15.0				
16A	+ 5.6				
16B	+ 5.6				
17A	+ 0.0				
17B	+ 0.0				
18A	-15.0				
18B	-15.0				
19A	TDS-CLK				
19B	TM-REMIR				
20A	TD-HEACT				
20B	TM-SEIR				
21A	T-ORES3				
21B	TA-AUIR				
22A	TD-CAPSY				
22B	TM-SL2				
23A	TM-RESMP				
23B	TM-ADR3				
24A	TM-RES				

GRP 20 1.820.701.00 <-- <-- <-- CONTINUATION

ELM 48 1.820.753.00 CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
24B	TM-IRC				
25A	TD-MVDIR				
25B	TD-MVCLK				
26A	TM-RESET				
26B	TM-RK				
27A	TM-ENB				
27B	TM-ADR2				
28A	TM-ADR1				
28B	TM-ADR0				
29A	TM-DATA7				
29B	TM-DATA6				
30A	TM-DATA5				
30B	TM-DATA4				
31A	TM-DATA3				
31B	TM-DATA2				
32A	TM-DATA1				
32B	TM-DATA0				

GRP 20 1.820.701.00 <-- <-- <-- CONTINUATION

ELM 49 1.820.766.00 MP-UNIT MASTER J10

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	TM-P14B				
2	TM-P15B				
3	TM-SL3				
4	TM-SL2				
5	TM-RESMP				
6	TM-ADR3				
7					
8	TM-BUSSW				
9	TM-NMI				
10	TM-RX				
11	TM-TX				
12	TM-DRFNR				
13	TM-IRQ				
14	T-PWRGN				
15	TM-SL7				
16	TM-C76K				
17					
18					
19	KEY				
20	+ 5.6				
21	+ 0.0				
22	TM-C3C7K				
23	TM-SL4				
24	TM-SL5				
25	TM-SL6				
26	TM-RESET				
27	TM-RW				
28	TM-FNB				
29	TM-ADR2				
30	TM-ADR1				
31	TM-ADR0				
32	TM-DATA7				
33	TM-DATA6				
34	TM-DATA5				
35	TM-DATA4				
36	TM-DATA3				
37	TM-DATA2				
38	TM-DATA1				
39	TM-DATA0				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 71 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 50 1.820.751.00
 SMPTE/EBU INTERFACE J11

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	FRMGND				
2	TRANSCM				
3	TRANSA				
4	TRANSB				
5	RECEIVB				
6	RECEIVA				
7	RECEIVCM				
8	FRMGND				
9	RCV-232				
10	TM-HX				
11	TM-TX				
12	TM-DRENB				
13	TM-SEIR				
14	SNJ-232				
15	TM-BUSSW				
16	TM-SLJ				
17	TM-ADR3				
18	+15.0				
19	KEY				
20	+5.0				
21	+J.0				
22	-15.0				
23	TM-SL4				
24	TM-SL5				
25	TM-SL6				
26	TM-RES				
27	TM-R4				
28	TM-ENB				
29	TM-ADR2				
30	TM-ADR1				
31	TM-ADRO				
32	TM-ATA7				
33	TM-ATA6				
34	TM-ATA5				
35	TM-ATA4				
36	TM-ATA3				
37	TM-ATA2				
38	TM-ATA1				
39	TM-ATAJ				

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 51 1.861.721.00
 MASTER SYSDON INTERFACE J12

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	T-SACA				
1B	T-SACB				
2A	T-SADC				
2B	T-READSL				
3A	T-WATSLS				
3B	T-DT-CH1				
4A	T-DT-CH2				
4B	T-DT-CH3				
5A	T-DT-MP				
5B	T-DT-RP1				
6A	T-DT-RP2				
6B	TREFINT				
7A	T-DT-SJM				
7B	TREFINT				
8A	T-DT-RES				
8B	TREFEXT				
9A					
9B	TREFEXT				
10A	T-REFEXT				
10B	T-REFINT				
11A	TA-AUIR				
11B					
12A					
12B					
13A					
13B					
14A	TM-SL6				
14B					
15A					
15B					
16A	+0.0				
16B	+0.0				
17A					
17B					
18A	+5.6				
18B	+5.6				
19A	TM-RES				
19B					
20A	TM-R4				
20B	TAD-RESA				
21A	TM-ENB				
21B	TAD-RESB				
22A	TM-ADR2				
22B	TAD-RESC				
23A	TM-ADR1				
23B	SSDAICLK				
24A	TM-ACRO				

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 51 1.861.721.00
 <-- <-- <-- CONTINUATION

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
24B	SSDAICLK				
25A	TM-DATA7				
25B	SSDAITX				
26A	TM-DATA6				
26B	SSDAITX				
27A	TM-DATA5				
27B	SSADTR				
28A	TM-DATA4				
28B	SSDAIDTR				
29A	TM-DATA3				
29B	SSDAICTS				
30A	TM-DATA2				
30B	SSDAICTS				
31A	TM-DATA1				
31B	SSDAMRX				
32A	TM-DATA0				
32B	SSDAIMRX				

ELM 60
 WIRE FIELD (FROM GRP20, FLM70)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+0.0	0	L		
2	+0.0	C	L		
3	+0.0	0	L		

ELM 61
 WIRE FIELD (FROM GRP20, FIM70)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	-26.0	S	L		
2	+26.0	L	L		
3	+0.0	C	L		
4	+0.0	C	L		
5	+0.0SENS	0	L		
6	+0.0	0	L		
7	+0.0	C	L		
8	+0.0	C	L		
9	-15.0	6	L		
10	+15.0	2	L		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 72 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 62
 WIRE FIELD

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.6	3	L		
2	+3.6	3	L		
3	+5.6SENS	4	U		
4	+STABSNS	3	U		
5	-STABSNS	5	U		
6	+CAPMCT	2	L		
7	+CAPMCT	4	L		
8	+CAPMCT	4	L		
9	+CAPMCT	4	L		
10	+REMSUP	8	U		
11	+24.0	7	U		
12	+24.0	7	U		
13	+24.0	7	U		
14	T-PWRON	5	U		
15	TD-C76K	9	U		

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 70
 FROM GRP21, ELM01 J13

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+5.6	3	F		
2	+5.6	3	F		
3	+5.6SENS	4	F		
4	TD-C76K	9	F		
5	+0.0	C	F		
6	+0.0	C	F		
7	T-PWRON	5	F		
8	+0.0	C	F		
9	+0.0	C	F		
10	+0.0	C	F		
11	+15.0	2	F		
12	-15.0	6	F		
13	+0.0	C	F		
14	+0.0	C	F		
15	+24.0	7	F		
16	+REMSUP	8	F		
17	+STABSNS	3	F		
18	-STABSNS	5	F		
19	-26.0	9	F		
20	+26.0	1	F		
21	+0.0	C	F		
22	+0.0SENS	C	F		
23	+CAPMCT	4	F		
24	+CAPMCT	2	F		

GRP 20 1.820.701.00
 <-- <-- <-- CONTINUATION

ELM 73
 TO BRAKE SOLENOID, RIGHT

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+24.0	7	F		
2	K-BRAKER	4	F		
3					

ELM 63
 WIRE FIELD (TO BRAKE SOLENOIDS)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	K-BRAKEL	1	U		
2	K-BRAKER	4	U		

ELM 71
 TO CAPSTAN MOTOR DRIVE AMP.

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+CAPMCT	4	F		
2					
3					
4					
5					
6	+CAPMCT	2	F		

ELM 72
 TO BRAKE SOLENOID, LEFT

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+24.0	7	F		
2	K-BRAKEL	1	F		
3					

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 73 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 25
 REMOTE CONTROL PANEL

ELM 1
 CONN. AUTOLOCATOR, REMOTE TIMER JO1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	SHIELD		B		
2			B		
3	TR-A		B		
4	KEY		B		
5	+ J.0		B		
6			B		
7	TR-B		B		
8	SIGN.GND		B		
9	+REMSUP		B		

ELM 2
 CONNECTOR SYNCHRONIZER JO2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ J.0		B		
2	BR-REW		B		
3	BR-FORW		B		
4	BR-VRSPD		B		
5	SR-VRSPD		B		
6	SR-REHSL		B		
7	OR-MVCLK		B		
8	KEY/CDIR		B		
9	BR-REC		B		
10	OR-MVDIR		B		
11	OR-CMCLK		B		
12	OR-SYENB		B		
13	IR-REFEX		B		
14	+ J.0		B		
15	BR-PLAY		B		
16	BR-STOP		B		
17	SR-LIFT		B		
18	SR-MUTE		B		
19	SR-REC		B		
20	SR-REM		B		
21	SR-FORW		B		
22	SR-PLAY		B		
23	SR-STOP		B		
24	KEY		B		
25	+24.0REM		B		

GRP 25
 <-- <-- <-- CONTINUATION

ELM 3
 CONN. PARALLEL REMOTE CONTROL JO3

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0		B		
2	BR-REW		B		
3	BR-FORW		B		
4	BR-VRSPD		B		
5	SR-VRSPD		B		
6	SR-FADRY		B		
7	BR-LCCST		B		
8	BR-FADRY		B		
9	BR-REC		B		
10	SR-RESET		B		
11	FAD1		B		
12	FAD2		B		
13	IR-REFEX		B		
14	SR-OLDC		B		
15	BR-PLAY		B		
16	BR-STOP		B		
17	SR-LIFT		B		
18	SR-LCCST		B		
19	SR-REC		B		
20	SR-REW		B		
21	SR-FORW		B		
22	SR-PLAY		B		
23	SR-STOP		B		
24	KEY		B		
25	+24.0REM		B		

ELM 4
 CONNECTOR SMPTE/EBU BUS JO4

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	FRMGND		B		
2	TRANSA		B		
3	RECEIVB		B		
4	RECEIVCM		B		
5	SPARE		B		
6	TRANSCM		B		
7	TRANSB		B		
8	RECEIVA		B		
9	FRMGND		B		

GRP 25
 <-- <-- <-- CONTINUATION

ELM 5
 CONNCTOR SMPTE/EBU BUS JO5

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	FRMGND		B		
2	TRANSA		B		
3	RECEIVB		B		
4	RECEIVCM		B		
5	SPARE		B		
6	TRANSCM		B		
7	TRANSB		B		
8	RECEIVA		B		
9	FRMGND		B		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 74 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 26
 SERIAL REMOTE INTERFACE

ELM 1
 FROM GRP27, ELM01 PO1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ J.0		B		
2	+ 5.0		B		
3	+REMSUP		B		
4	T-RL3		B		
5	T-RL1		B		
6	T-SL3		B		
7	T-A3		B		
8	T-B0		B		
9	T-A1		B		
10	T-A2		B		
11	T-B3		B		
12	T-A0		B		
13	T-B1		B		
14	T-B2		B		
15	T-B0		B		
16	T-SL0		B		
17	T-SL1		B		
18	T-RL7		B		
19	T-RL6		B		
20	T-0E		B		
21	T-SL2		B		
22	T-RL5		B		
23	T-RL4		B		
24	T-RESET		B		
25	T-RL3		B		
26	T-RL2		B		

ELM 2
 TO GRP25, ELM01 PC2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	SHIELD		B		
2			B		
3			B		
4	TR-B		B		
5	TR-A		B		
6	SIGN.GND		B		
7	KEY		B		
8	+REMSUP		B		
9	+ J.0		B		
10			B		

GRP 27
 PARALLEL REMOTE INTERFACE

ELM 1
 TO GRP26, ELM01 PO1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0		B		
2	+ 5.0		B		
3	+REMSUP		B		
4	T-RLC		B		
5	T-RL1		B		
6	T-SL3		B		
7	T-A3		B		
8	T-B0		B		
9	T-A1		B		
10	T-A2		B		
11	T-B3		B		
12	T-A0		B		
13	T-B1		B		
14	T-B2		B		
15	T-B0		B		
16	T-SL0		B		
17	T-SL1		B		
18	T-RL7		B		
19	T-RL6		B		
20	T-0E		B		
21	T-SL2		B		
22	T-RL5		B		
23	T-RL4		B		
24	T-RESET		B		
25	T-RL3		B		
26	T-RL2		B		

ELM 2
 FROM GRP20, FLN16 PC2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0		B		
2	+ 0.0		B		
3	+ 5.6		B		
4	+ 5.6		B		
5	+REMSUP		B		
6	+REMSUP		B		
7	TM-DSL5		B		
8	TM-ISL5		B		
9	TM-DRES		B		
10	TM-IRES		B		
11	TM-DRW		B		
12	TM-IRW		B		
13	TM-DENB		B		
14	TM-IENB		B		
15	IR-REFEX		B		
16	0.0 VCU		B		
17	TC-TCMV		B		
18	TC-TCDIR		B		
19	TM-IADRO		B		
20	TM-IADRO		B		
21	TM-REMTR		B		
22	0.0 VCU		B		
23	TD-MVCLK		B		
24	TD-MVDIR		B		
25	TM-DATA7		B		
26	0.0 VCU		B		
27	TM-DATA6		B		
28	0.0 VCU		B		
29	TM-DATA5		B		
30	0.0 VCU		B		
31	TM-DATA4		B		
32	0.0 VCU		B		
33	TM-DATA3		B		
34	0.0 VCU		B		
35	TM-DATA2		B		
36	0.0 VCU		B		
37	TM-DATA1		B		
38	0.0 VCU		B		
39	TM-DATA0		B		
40	0.0 VCU		B		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 75 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 27 1.820.738.00
 <-- <-- <-- CONTINUATION

ELM 3
 TO CONNECTOR SYNCHRONIZER P03

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	BR-REM				
4	BR-PLAY				
5	BR-FORW				
6	BR-STOP				
7	BR-VRSPD				
8	SR-LIFT				
9	SR-VRSPD				
10	SR-MUTE				
11	SR-REHSL				
12	SR-REC				
13	OR-MVCLK				
14	SR-REM				
15	KEY/CDIR				
16	SR-FORW				
17	BR-REC				
18	SR-PLAY				
19	OR-MVDIR				
20	SR-STOP				
21	OR-CMCLK				
22	KEY				
23	OR-SYENB				
24	+24.0JREM				
25	IR-REFEX				
26					

GRP 27 1.820.738.00
 <-- <-- <-- CONTINUATION

ELM 4
 TO CONN. PARALLEL REMOTE CONTR. P04

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	SR-OLCC				
3	BR-REM				
4	BR-PLAY				
5	BR-FORW				
6	BR-STOP				
7	BR-VRSPD				
8	SR-LIFT				
9	SR-VRSPD				
10	SR-LCCST				
11	SR-FADRY				
12	SR-REC				
13	BR-LCCST				
14	SR-REM				
15	BR-FADRY				
16	SR-FORW				
17	BR-REC				
18	SR-PLAY				
19	SR-RESET				
20	SR-STOP				
21	FAD1				
22	KEY				
23	FAD2				
24	+24.0JREM				
25	IR-REFEX				
26					

ELM 5 P05

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	GND			Y	

GRP 30 1.820.775.00
 SPOOLING MOTOR DRIVE AMPLIFIER RIGHT

ELM 1
 FROM GRP31, ELM01 J01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	-PSVTMOT			M	
3	+PSVTMOT			M	
4					
5	-PSVTMOT			M	
6	+PSVTMOT			M	
7	+ 0.0				
8	-PSVTMOT			M	
9	+PSVTMOT			M	
10					
11	-PSVTMOT			M	
12	+PSVTMOT			M	

ELM 2
 FROM GRP20, ELM02 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7	PWMR-L1				
8	PWMR-L2				
9	PWMR-I1				
10	PWMR-I2				
11	PWMR-L3				
12	PWMR-L4				
13	AN-ICRD				
14	PWMR-L5				
15	PWMR-L6				
16	+ 0.0				

ELM 3 P02

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+VMOTR-T			J	
2	-VMOTR-T			J	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 76 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 31 1.820.777.00
 SPOOLING MOTOR SUPPLY

ELM 1
 OUTPUT P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+PSVTMOT			M	
2	+PSVTMOT			M	
3	+PSVTMOT			M	
4	+PSVTMOT			M	
5	+PSVTMOT			M	
6	+PSVTMOT			M	
7	+PSVTMOT			M	
8	+PSVTMOT			M	
9	-PSVTMOT			M	
10	-PSVTMOT			M	
11	-PSVTMOT			M	
12	-PSVTMOT			M	
13	-PSVTMOT			M	
14	-PSVTMOT			M	
15	-PSVTMOT			M	
16	-PSVTMOT			M	
17					
18					
19					
20					
21	+ J.0			M	
22	+ J.0			M	
23					
24					

ELM 2
 FROM GRP08, ELM05 J01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	ACPWM-A1			F	
2	ACPWM-A3			F	
3	ACPWM-A5			F	
4	ACPWM-A2			F	
5	ACPWM-A4			F	
6	ACPWM-A6			F	
7	ACPWM-B1			M	
8	ACPWM-B2			M	
9	ACPWM-B3			M	
10	ACPWM-B4			M	
11	ACPWM-B5			M	
12	ACPWM-B6			M	

GRP 31 1.820.777.00
 <-- <-- <-- CONTINUATION

ELM 3
 FROM GRP20, ELM05 P02

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.6				
4	+ 5.6				
5	+15.0				
6	-15.0				
7	TC-C307K				
8	TD-PWEAB				
9	+YSUP				
10	-YSUP				
11					
12					
13					
14					
15					
16					

ELM 4
 CONNECTOR TO CAPACITOR (GRP34) P03

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+PSVTMOT			F	
2	+PSVTMOT			F	
3	+PSVTMOT			F	
4	-PSVTMOT			F	
5	-PSVTMOT			F	
6	-PSVTMOT			F	

GRP 32 1.820.790.00
 SWITCHING STABILIZER

ELM 1
 INPUT FROM GRP12, ELM05 J01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+STABIN			F	
2	+ 0.0			F	
3	+ 0.0			F	
4	+STABIN			F	
5	+ 0.0			F	
6	-STABIN			F	
7	+CAPMOT			F	
8					
9	OCAPMOT			F	
10	ACPWE-D1			F	
11					
12	ACPWE-R1			F	

ELM 2
 OUTPUT P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 5.6			M	
2	+ 5.6			M	
3	+5.6SENS			M	
4	TD-C76K			M	
5	+ 0.0			M	
6	+ 0.0			M	
7	T-PWRON			M	
8	+ 0.0			M	
9	+ 0.0			M	
10	+ 0.0			M	
11	+15.0			M	
12	-15.0			M	
13	+ 0.0			M	
14	+ 0.0			M	
15	+24.0			M	
16	+REMSUP			M	
17	+STABSNS			M	
18	-STABSNS			M	
19	-26.0			M	
20	+26.0			M	
21	+ 0.0			M	
22	+0.0SENS			M	
23	OCAPMOT			M	
24	+CAPMOT			M	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 77 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 33 1.820.775.00
 SPOOLING MOTOR DRIVE AMPLIFIER LEFT

ELM 1 FROM GRP31, ELM01 J01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	-PSVTMOT		M		
2	+PSVTMOT		M		
3	+PSVTMOT		M		
4	+PSVTMOT		M		
5	-PSVTMOT		M		
6	+PSVTMOT		M		
7	+3.0		M		
8	-PSVTMOT		M		
9	+PSVTMOT		M		
10			M		
11	-PSVTMOT		M		
12	+PSVTMOT		M		

ELM 2 FROM GRP20, ELM01 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+3.0				
2	+3.0				
3	+5.6				
4	+5.6				
5	+15.0				
6	-15.0				
7	PWMPL-L1				
8	PWMPL-L2				
9	PWMPL-H1				
10	PWMPL-H2				
11	PWMPL-L3				
12	PWMPL-L4				
13	AN-ICLD				
14	PWMPL-L5				
15	PWMPL-L6				
16	+3.0				

ELM 3 PC2

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+VMOTLFT		J		
2	-VMOTLFT		J		

GRP 34 59.26.6223
 CAPACITOR, BELONGING TO GRP 31

ELM 1 CAPACITOR

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1A	+PSVTMOT		2	L	
1B	+PSVTMOT		2	L	
1C	+PSVTMOT		2	L	
2A	-PSVTMOT		6	L	
2B	-PSVTMOT		6	L	
2C	-PSVTMOT		6	L	

ELM 2 CONNECTOR (FROM GRP31) J01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+PSVTMOT		2	M	
2	+PSVTMOT		2	M	
3	+PSVTMOT		2	M	
4	-PSVTMOT		6	M	
5	-PSVTMOT		6	M	
6	-PSVTMOT		6	M	

GRP 36 1.820.190.00
 TORQUE MOTOR, LEFT

ELM 1 1.820.771.00 TACHO SENSOR P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+0.0				
2	+0.0				
3	+5.6				
4	+5.6				
5	+15.0				
6	-15.0				
7	AN-RES1				
8	TD-TML2				
9	TD-TML1				
10					

ELM 2 FROM GRP33, ELM 03

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+VMOTLFT		2		
2	-VMOTLFT		0		

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 78 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 37 1.820.190.00
 TORQUE MOTOR, RIGHT

ELM 1 1.820.771.00 TACHO SENSOR P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+3.0				
2	+3.0				
3	+5.6				
4	+5.6				
5	+15.0				
6	-15.0				
7	AN-RES2				
8	TD-TMK2				
9	TD-TMR1				
10					

ELM 2 FROM GRP30, ELM 03

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+VMOTRHT		2		
2	-VMOTRHT		0		

GRP 38 1.021.695.00
 CAPSTAN MOTOR (ELECTRONICS BOARD)

ELM 1 FROM GRP39, ELM02 J01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	CPHASE-R		2	F	
2	CPHASE-T		9	F	
3	CPHASE-S		0	F	
4	TC-HALL1			F	
5					
6	+15.0			F	
7	TC-HALL2			F	
8	TO-TCM1			F	
9	+5V			F	
10	TC-HALL3			F	
11	TO-TCM2			F	
12	+0.0			F	

ELM 2 1.021.696.00 TACHO SENSOR UNIT (WIRE FIELD)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1			3	U	
2			4	U	
3			5	U	
4			6	U	

ELM 3 1.021.697.00 HALL SENSOR BOARD (WIRE FIELD)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1			0	U	
2			2	U	
3			3	U	
4			4	U	
5			5	U	
6			6	U	
7			7	U	
8			8	U	

GRP 38 1.021.695.00
 STATOR (WIRE FIELD)

ELM 4 STATOR (WIRE FIELD)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	CPHASE-R		2	L	
2	CPHASE-S		0	L	
3	CPHASE-T		9	L	

ELM 5 GROUND CONNECTION (WIRE FIELD)

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	GND		0	L	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 79 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 39 1.820.774.00
 CAPSTAN MOTOR DRIVE AMPLIFIER

ELM 1
 FROM GRP20, ELM03 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 3.0				
3	+ 5.0				
4	+ 5.0				
5	+15.0				
6	-15.0				
7	AN-CPDC				
8	TD-TCM1				
9	+ 0.0				
10	TD-TCM2				
11	T-SPOSL1				
12	T-SPOSL2				
13	TC-CPREF				
14	TC-CAPDC				
15	TD-C76K				
16	+ 0.0				

GRP 39 1.820.774.00
 <-- <-- <-- CONTINUATION

ELM 3
 FROM GRP20, ELM71 P03

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	OCAPMCT			M	
2					
3					
4					
5	+CAPMCT			M	

GRP 40 1.080.230.00
 BRAKE ASSEMBLY, LEFT

ELM 1
 BRAKE SOLENOID

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+24.0	7		M	
2	K-BRAKEL	1		M	
3					

ELM 2
 TO GRP30, ELM01 P02

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	CPHASE-R			M	
2	CPHASE-T			M	
3	CPHASE-S			M	
4	TC-HALL1			M	
5	-15.0			M	
6	+15.0			M	
7	TC-HALL2			M	
8	TD-TCM1			M	
9	+ 5V			M	
10	TC-HALL3			M	
11	TD-TCM2			M	
12	+ 0.0			M	

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 80 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 41 1.080.240.00
 BRAKE ASSEMBLY, RIGHT

ELM 1
 BRAKE SOLENOID

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+24.0	7		M	
2	K-BRAKER	4		M	
3					

GRP 42 1.820.772.00
 TAPE TENSION SENSOR, LEFT

ELM 1
 FROM GRP20, ELM12 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.0				
4	+ 5.0				
5	+15.0				
6	-15.0				
7					
8					
9	AN-TTL				
10					

GRP 43 1.820.772.00
 TAPE TENSION SENSOR, RIGHT

ELM 1
 FROM GRP20, ELM13 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.0				
4	+ 5.0				
5	+15.0				
6	-15.0				
7					
8					
9	AN-TTR				
10					

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 81 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 44 1.820.793.00
 OPTO SENSOR

ELM 1
 FROM GRP20, ELM06 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.0				
4	+ 5.0				
5	+15.0				
6	-15.0				
7	TD-YTRSP				
8	TD-SHLD				
9	TD-TRSP				
10	TD-TRSPR				

GRP 45 1.820.770.00
 MCVE SENSOR

ELM 1
 FROM GRP20, ELM11 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.0				
4	+ 5.0				
5	+15.0				
6	-15.0				
7	AN-RES3				
8	TD-MCVE2				
9	TD-MCVE1				
10					

GRP 46 1.820.773.00
 TAPE LIFTER CONTROL, LEFT

ELM 1
 FROM GRP20, ELM07 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.0				
4	+ 5.0				
5	+26.0				
6	-26.0				
7					
8					
9					
10					
11	TD-RALP1				
12	TD-RALC2				
13	TD-RALP2				
14	TD-RALC1				
15	TD-RALFN				
16					

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 82 *
 * 1-861-022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1-861-080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 47 1-820-773.00
 TAPE LIFTER CONTROL, RIGHT

GRP 48 1-820-240-00
 PLSHBUITON ASSEMBLY

GRP 48 1-820-240-00
 <-- <-- <-- CONTINUATION

ELM 1 FROM GRP20, ELM08 PO1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 3-0				
2	+ 3-0				
3	+ 3-0				
4	+ 3-0				
5	+26-0				
6	-26-0				
7					
8					
9					
10					
11	TD-RARP1				
12	TD-RARG2				
13	TD-RARP2				
14	TD-RARC1				
15	TD-RAREN				
16					

ELM 1 FROM GRP50, ELM03

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0-0				
2	+ 0-0				
3	+ 5-6				
4	+ 5-6				
5	+24-0L				
6	BM-0-2				
7	BM-0-3				
8	BM-0-4				
9	BM-0-5				
10	BM-0-6				
11	BM-C-7				
12	TM-ENO				
13	TM-RL7				
14	TM-RL6				
15	TM-RL5				
16	TM-RL4				
17	TM-RL3				
18	TM-RL2				
19	TM-RL1				
20	TM-CUE1				
21					
22	TM-CUE2				
23					
24	ANM-SH3				
25	ANM-SH2				
26	ANM-SH1				

ELM 3 WIRE FIELD

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+24-0L				
2	+24-0L				
3	RM-0-7				
4	RM-0-6				
5	RM-0-5				
6	RM-0-4				
7	RM-0-3				
8	RM-0-2				
9					
10					

ELM 2 CONNECTOR EDIT ASSEMBLY

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 3-0				
2	+ 0-0				
3	+ 5-0				
4	TM-ENO				
5	TM-CUE1				
6	TM-RL1				
7	TM-CUE2				
8	ANM-SH1				
9	ANM-SH3				
10	ANM-SH2				

 * WILLI STUDER AG * L O C A T I O N P I N L I S T * 86/12/08 * 10:54 * P A G E 83 *
 * 1-861-022.00 D820X PCM RECORDER * 86/08/27 - 00 *
 ASY 11 1-861-080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 49 1-820-250.00
 EDIT ASSEMBLY

GRP 50 1-820-768-00
 TAPE DECK DISPLAY DRIVER

GRP 50 1-820-768-00
 <-- <-- <-- CONTINUATION

ELM 1 FROM GRP48, ELM02

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0-0				
2	+ 0-0				
3	+ 5-0				
4	TM-ENO				
5	TM-CUE1				
6	TM-RL1				
7	TM-CUE2				
8	ANM-SH1				
9	ANM-SH3				
10	ANM-SH2				

ELM 1 FROM GRP20, ELM15 PO1

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0-0				
2	+ 0-0				
3	+ 5-6				
4	+ 5-6				
5	+24-0				
6	+24-0				
7	TM-DSL4				
8	TM-ISL4				
9	TM-DRES				
10	TM-IRE5				
11	TM-DRW				
12	TM-IRW				
13	TM-DEN8				
14	TM-IEN8				
15	TM-DADR2				
16	TM-IADR2				
17	TM-DADR1				
18	TM-IADR1				
19	TM-DADRO				
20	TM-IADRO				
21	TM-SHIR				
22	0-0 VCU				
23	TM-KBIR				
24	0-0 VCU				
25	TM-CATA7				
26	0-0 VCU				
27	TM-DATA6				
28	0-0 VCU				
29	TM-DATA5				
30	0-0 VCU				
31	TM-DATA4				
32	0-0 VCU				
33	TM-DATA3				
34	0-0 VCU				
35	TM-DATA2				
36	0-0 VCU				
37	TM-DATA1				
38	0-0 VCU				
39	TM-DATA0				
40	0-0 VCU				

ELM 2 CONNECTOR COMMAND UNIT PO3

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0-0				
2	+ 0-0				
3	+ 5-6				
4	+ 5-6				
5					
6	TM-EN4				
7	TM-EN3				
8	TM-EN2				
9	TM-EN1				
10	TM-RL6				
11	TM-RL7				
12	TM-RL0				
13	TM-RL1				
14	TM-RL2				
15	TM-RL3				
16	TM-RL4				
17	TM-RL5				
18	TM-B				
19	TM-DP				
20	TM-A				
21	TM-C				
22	TM-D				
23	TM-F				
24	TM-E				
25	TM-G				
26	TM-O9				
27	TM-O8				
28	TM-O7				
29	TM-O6				
30	TM-O5				
31	TM-O4				
32	TM-O3				
33	TM-O2				
34	TM-O1				
35	TM-O0				
36	TM-L2				
37	TM-L1				
38	TM-L3				
39					
40					

 * WILLI STUDER AG * L O C A T I C N P I N L I S T * 86/12/08 * 10:54 * P A G E 84 *

 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 50 1.820.768.00
 <-- <-- <-- CONTINUATION

GRP 50 1.820.768.00
 <-- <-- <-- CONTINUATION

GRP 51 1.870.230.00
 COMMAND UNIT

ELM 3
 CONNECTOR PUSHBUTTON ASSEMBLY P02

ELM 4
 CONNECTOR LCD DISPLAY UNIT P04

ELM 1
 FROM GRP50,ELM02

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.6				
4	+ 5.6				
5	+24.0L				
6	BM-0.2				
7	BM-0.3				
8	BM-0.4				
9	BM-0.5				
10	BM-0.6				
11	BM-0.7				
12	TM-ENG				
13	TM-RL7				
14	TM-RL6				
15	TM-RL5				
16	TM-RL4				
17	TM-RL3				
18	TM-RL2				
19	TM-RL1				
20	TM-CUE1				
21					
22	TM-CUE2				
23					
24	ANM-SH3				
25	ANM-SH2				
26	ANM-SH1				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 5.0				
3	TL-CS				
4	TL-ENB				
5	TL-WR				
6	TL-A0				
7	TL-D0				
8	TL-D1				
9	TL-D2				
10	TL-D3				
11	TL-D4				
12	TL-D5				
13	TL-D6				
14	TL-D7				
15	TL-RESET				
16	0.0				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 0.0				
3	+ 5.6				
4	+ 5.6				
5					
6	TM-EN4				
7	TM-EN3				
8	TM-EN2				
9	TM-EN1				
10	TM-RL6				
11	TM-RL7				
12	TM-RLC				
13	TM-RL1				
14	TM-RL2				
15	TM-RL3				
16	TM-RL4				
17	TM-RL5				
18	TM-B				
19	TM-DP				
20	TM-A				
21	TM-C				
22	TM-D				
23	TM-F				
24	TM-E				
25	TM-G				
26	TM-D9				
27	TM-D8				
28	TM-D7				
29	TM-D6				
30	TM-D5				
31	TM-D4				
32	TM-D3				
33	TM-D2				
34	TM-D1				
35	TM-D0				
36	TM-L2				
37	TM-L1				
38	TM-L3				
39					
40					

 * WILLI STUDER AG * L O C A T I C N P I N L I S T * 86/12/08 * 10:54 * P A G E 85 *

 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

 ASY 11 1.861.080.00 TAPE TRANSPORT D820X <-- <-- <-- CONTINUATION

GRP 52 1.820.233.00
 LCD DISPLAY UNIT

GRP 59 1.820.737.00
 FUSE/SUPPLY FAILURE DETECTOR

ELM 1
 FROM GRP50, ELM04

ELM 1
 FROM GRP20, ELM14 P01

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+ 0.0				
2	+ 5.0				
3	TL-CS				
4	TL-ENB				
5	TL-WR				
6	TL-A0				
7	TL-D0				
8	TL-D1				
9	TL-D2				
10	TL-D3				
11	TL-D4				
12	TL-D5				
13	TL-D6				
14	TL-D7				
15	TL-RESET				
16	0.0				

PNT	SIGNAL NAME	COLOR	LV	TYPE	F
1	+CAPMOT				
2	+CAPPCT				
3					
4	+24.0				
5	-STABSNS				
6	T-SUPVON				
7	+STABSNS				
8	+STABSNS				
9	+ 5.6				
10	+ 5.6				
11	+ 0.0				
12	+ 0.0				
13	-15.0				
14	+15.0				
15	+26.0				
16	-26.0				

* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 86 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

Table with columns: SIGNAL NAME, COLOR, MI, ASY, GRP, ELM, PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, ELEMNT NR. Includes entries for CONNECTOR LCD DISPLAY UNIT, RECTIFIER, CAPACITOR, and various motor drive and sensor components.

./.

* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 87 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

Table with columns: SIGNAL NAME, COLOR, MI, ASY, GRP, ELM, PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, ELEMNT NR. Includes entries for TAPE LIFT MOTOR, TACHO SENSOR, MOVE SENSOR, TAPE TENSION SENSOR, FUSE FAILURE DETECTOR, DISPLAY DRIVER, PARALLEL REMOTE CONTROL, and various SYNCHRONIZER components.

./.

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 88 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
<<--- CONT.OF			11	20	40	21				SPDOLING MOTOR DRIVER	J01	1.820.759.00
+ 0.0			11	20	41	21				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	17A				CAPSTAN INTERFACE	J03	1.820.777.00
			11	20	42	17B				CAPSTAN INTERFACE	J03	1.820.777.00
			11	20	43	17A				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	43	17B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	44	21				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	21				SPDOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	21				MP-UNIT TO CONTROL	J07	1.820.765.00
			11	20	47	21				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	20	48	17A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	48	17B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	21				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	21				SMPT/EBU INTERFACE	J11	1.820.751.00
			11	20	60	1			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	60	2			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	60	3			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	61	3			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	61	4			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	61	6			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	61	7			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	61	8			L	WIRE FIELD (FROM GRP20. ELM70)		
			11	20	70	5			F	FRM GRP21. ELM01	J13	
			11	20	70	6			F	FRM GRP21. ELM01	J13	
			11	20	70	8			F	FRM GRP21. ELM01	J13	
			11	20	70	9			F	FRM GRP21. ELM01	J13	
			11	20	70	10			F	FRM GRP21. ELM01	J13	
			11	20	70	13			F	FRM GRP21. ELM01	J13	
			11	20	70	14			F	FRM GRP21. ELM01	J13	
			11	20	70	21			F	FRM GRP21. ELM01	J13	
			11	25	1	5			B	CONN. AUTOLGATOR. REMOTE TIMER	J01	
			11	25	2	1			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	2	14			B	CONNECTOR SYNCHRONIZER	J07	
			11	25	3	1			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	26	1	1				FRM GRP27. ELM01	P01	
			11	26	2	9				TO GRP25. ELM01	P02	
			11	27	1	1				TO GRP26. ELM01	P01	
			11	27	2	1				FRM GRP20. ELM16	P02	
			11	27	2	2				FRM GRP20. ELM16	P02	
			11	27	3	1				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	3	2				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	1				TO CONN. PARALLEL REMOTE CONTR.	P04	
			11	30	1	7			M	FRM GRP31. ELM01	J01	
			11	30	2	1				FRM GRP20. ELM02	P01	
			11	30	2	2				FRM GRP20. ELM02	P01	
			11	30	2	16				FRM GRP20. ELM02	P01	
			11	31	1	21			M	OUTPUT	P01	
			11	31	1	22			M	OUTPUT	P01	
			11	31	3	1				FRM GRP20. ELM05	P02	
			11	31	3	2				FRM GRP20. ELM05	P02	
			11	32	1	2			F	INPUT FROM GRP12. ELM05	J01	
			11	32	1	3			F	INPUT FROM GRP12. ELM05	J01	
			11	32	1	5			F	INPUT FROM GRP12. ELM05	J01	
			11	32	2	5			M	OUTPUT	P01	

./.

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 89 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
<<--- CONT.OF			11	32	2	6			M	OUTPUT	P01	
+ 0.0			11	32	2	8			M	OUTPUT	P01	
			11	32	2	9			M	OUTPUT	P01	
			11	32	2	10			M	OUTPUT	P01	
			11	32	2	13			M	OUTPUT	P01	
			11	32	2	14			M	OUTPUT	P01	
			11	32	2	21			M	OUTPUT	P01	
			11	33	1	7			M	FRM GRP31. ELM01	J01	
			11	33	2	1				FRM GRP20. ELM01	P01	
			11	33	2	2				FRM GRP20. ELM01	P01	
			11	33	2	16				FRM GRP20. ELM01	P01	
			11	36	1	1				TACHO SENSOR	P01	1.820.771.00
			11	36	1	2				TACHO SENSOR	P01	1.820.771.00
			11	37	1	1				TACHO SENSOR	P01	1.820.771.00
			11	37	1	2				TACHO SENSOR	P01	1.820.771.00
			11	38	1	12			F	FRM GRP39. ELM02	J01	
			11	39	1	1				FRM GRP20. ELM03	P01	
			11	39	1	2				FRM GRP20. ELM03	P01	
			11	39	1	9				FRM GRP20. ELM03	P01	
			11	39	1	16				FRM GRP20. ELM03	P01	
			11	39	2	12			M	TO GRP36. ELM01	P02	
			11	42	1	1				FRM GRP20. ELM12	P01	
			11	42	1	2				FRM GRP20. ELM12	P01	
			11	43	1	1				FRM GRP20. ELM13	P01	
			11	43	1	2				FRM GRP20. ELM13	P01	
			11	44	1	1				FRM GRP20. ELM06	P01	
			11	44	1	2				FRM GRP20. ELM06	P01	
			11	45	1	1				FRM GRP20. ELM11	P01	
			11	45	1	2				FRM GRP20. ELM11	P01	
			11	46	1	1				FRM GRP20. ELM07	P01	
			11	46	1	2				FRM GRP20. ELM07	P01	
			11	47	1	1				FRM GRP20. ELM08	P01	
			11	47	1	2				FRM GRP20. ELM08	P01	
			11	48	1	1				FRM GRP50. ELM03	P01	
			11	48	1	2				FRM GRP50. ELM03	P01	
			11	48	2	1				CONNECTOR EDIT ASSEMBLY		
			11	48	2	2				CONNECTOR EDIT ASSEMBLY		
			11	49	1	1				FRM GRP48. ELM02		
			11	49	1	2				FRM GRP48. ELM02		
			11	49	2	5				WIRE FIELD		
			11	50	1	1				FRM GRP20. ELM15	P01	
			11	50	1	2				FRM GRP20. ELM15	P01	
			11	50	2	1				CONNECTOR COMMAND UNIT	P03	
			11	50	2	2				CONNECTOR COMMAND UNIT	P03	
			11	50	3	1				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	50	3	2				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	50	4	1				CONNECTOR LCD DISPLAY UNIT	P04	
			11	51	1	1				FRM GRP50. ELM02		
			11	51	1	2				FRM GRP50. ELM02		
			11	52	1	1				FRM GRP50. ELM04		
			11	59	1	11				FRM GRP20. ELM14	P01	
			11	59	1	12				FRM GRP20. ELM14	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 90 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
* 5.0			11	26	1	2				FROM GRP27. ELM01	P01	
			11	27	1	2				TO GRP26. ELM01	P01	
			11	48	2	3				CONNECTOR EDIT ASSEMBLY		
			11	49	1	3				FROM GRP48. ELM02		
			11	49	2	1				WIRE FIELD		
			11	50	4	2				CONNECTOR LCD DISPLAY UNIT	P04	
		11	52	1	2				FROM GRP50. ELM04			
* 5.6	3		11	19	1	1			F	FROM GRP32. ELM02	J01	
	3		11	19	1	2			F	FROM GRP32. ELM02	J01	
	3		11	19	2	1			M	TO GRP21. ELM02	P01	
	3		11	19	2	2			M	TO GRP21. ELM02	P01	
			11	20	1	3				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	1	4				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	2	3				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	2	4				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	3	3				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	20	3	4				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	20	4	3				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	4	4				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	5	3				SPOOLING MOTOR SUPPLY	P05	
			11	20	5	4				SPOOLING MOTOR SUPPLY	P05	
			11	20	6	3				EXT. SENSORS	P06	
			11	20	6	4				EXT. SENSORS	P06	
			11	20	7	3				TAPE LIFT MOTOR. LEFT	P07	
			11	20	7	4				TAPE LIFT MOTOR. LEFT	P07	
			11	20	8	3				TAPE LIFT MOTOR. RIGHT	P08	
			11	20	8	4				TAPE LIFT MOTOR. RIGHT	P08	
			11	20	9	3				TACHC SENSOR (SPOOLING M. LEFT)	P09	
			11	20	9	4				TACHC SENSOR (SPOOLING M. LEFT)	P09	
			11	20	10	3				TACHC SENSOR (SPOOLING M. RIGHT)	P10	
			11	20	10	4				TACHC SENSOR (SPOOLING M. RIGHT)	P10	
			11	20	11	3				MOVE SENSOR	P11	
			11	20	11	4				MOVE SENSOR	P11	
			11	20	12	3				TAPE TENSION SENSOR. LEFT	P12	
			11	20	12	4				TAPE TENSION SENSOR. LEFT	P12	
			11	20	13	3				TAPE TENSION SENSOR. RIGHT	P13	
			11	20	13	4				TAPE TENSION SENSOR. RIGHT	P13	
			11	20	14	3				FUSE FAILURE DETECTOR	P14	
			11	20	14	10				FUSE FAILURE DETECTOR	P14	
			11	20	15	3				DISPLAY DRIVER	P15	
			11	20	15	4				DISPLAY DRIVER	P15	
			11	20	16	3				PARALLEL REMOTE CONTROL	P16	
			11	20	16	4				PARALLEL REMOTE CONTROL	P16	
			11	20	17	3				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	17	4				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	3				VU-METER PANEL. EXTERNAL	P18	
			11	20	18	4				VU-METER PANEL. EXTERNAL	P18	
			11	20	19	3				SOURCE SELECTOR	P19	
			11	20	19	4				SOURCE SELECTOR	P19	
			11	20	40	20				SPOOLING MOTOR DRIVER	J01	1.870.759.00
			11	20	41	20				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	16A				CAPSTAN INTERFACE	J03	1.820.727.00
			11	20	42	16B				CAPSTAN INTERFACE	J03	1.820.727.00
			11	20	43	16A				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 91 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
<<--- CONT.OF			11	20	43	16B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
* 5.6			11	20	44	20				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	20				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	20				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	20				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	20	48	16A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	48	16B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	20				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	20				SNPTE/EBU INTERFACE	J11	1.820.751.00
		3	11	20	62	1			L	WIRE FIELD		
		3	11	20	62	2			L	WIRE FIELD		
		3	11	20	70	1			F	FROM GRP21. ELM01	J13	
		3	11	20	70	2			F	FROM GRP21. ELM01	J13	
			11	27	2	3				FROM GRP20. ELM16	P02	
			11	27	2	4				FROM GRP20. ELM16	P02	
			11	30	2	3				FROM GRP20. ELM02	P01	
			11	30	2	4				FROM GRP20. ELM02	P01	
			11	31	3	3				FROM GRP20. ELM05	P02	
			11	31	3	4				FROM GRP20. ELM05	P02	
			11	32	2	1			M	OUTPUT	P01	
			11	32	2	2			M	OUTPUT	P01	
			11	33	2	3				FROM GRP20. ELM01	P01	
			11	33	2	4				FROM GRP20. ELM01	P01	
			11	36	1	3				TACHC SENSOR	P01	1.820.771.00
			11	36	1	4				TACHC SENSOR	P01	1.820.771.00
			11	37	1	3				TACHC SENSOR	P01	1.820.771.00
			11	37	1	4				TACHC SENSOR	P01	1.820.771.00
			11	39	1	3				FROM GRP20. ELM03	P01	
			11	39	1	4				FROM GRP20. ELM03	P01	
			11	42	1	3				FROM GRP20. ELM12	P01	
			11	42	1	4				FROM GRP20. ELM12	P01	
			11	43	1	3				FROM GRP20. ELM13	P01	
			11	43	1	4				FROM GRP20. ELM13	P01	
			11	44	1	3				FROM GRP20. ELM06	P01	
			11	44	1	4				FROM GRP20. ELM06	P01	
			11	45	1	3				FROM GRP20. ELM11	P01	
			11	45	1	4				FROM GRP20. ELM11	P01	
			11	46	1	3				FROM GRP20. ELM07	P01	
			11	46	1	4				FROM GRP20. ELM07	P01	
			11	47	1	3				FROM GRP20. ELM08	P01	
			11	47	1	4				FROM GRP20. ELM08	P01	
			11	48	1	3				FROM GRP50. ELM03		
			11	48	1	4				FROM GRP50. ELM03		
			11	50	1	3				FROM GRP20. ELM15	P01	
			11	50	1	4				FROM GRP20. ELM15	P01	
			11	50	2	3				CONNECTOR COMMAND UNIT	P03	
			11	50	2	4				CONNECTOR COMMAND UNIT	P03	
			11	50	3	3				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	50	3	4				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	3				FROM GRP50. ELM02		
			11	51	1	4				FROM GRP50. ELM02		
			11	59	1	3				FROM GRP20. ELM14	P01	
			11	59	1	4				FROM GRP20. ELM14	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 52 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
+ 5V			11	38	1	9			F	FROM GRP39, ELM02	J01	
			11	39	2	9			M	TO GRP38, ELM01	P02	
*CAPMUT	2		1	79	1	24				POWER CONNECTOR (24 PIN MOLEX FEM)		
	2		1	79	2	24				POWER CONNECTOR (24 PIN MOLEX MALE)		
	2		11	11	3	3			L	RECTIFIER	DZ03	70.01-0231
	2		11	12	4	1			L	CAPACITOR	C04	59.26.7103
	2		11	12	5	7			M	CONNECTOR TO GRP32, ELM01	P01	
	2		11	19	1	24			F	FROM GRP32, ELM02	J01	
	2		11	19	2	24			M	TO GRP21, ELM02	P01	
	2		11	20	14	1			F	FUSE FAILURE DETECTOR	P14	
	2		11	20	14	2			F	FUSE FAILURE DETECTOR	P14	
	2		11	20	62	6			L	WIRE FIELD		
	2		11	20	62	7			L	WIRE FIELD		
	2		11	20	70	24			F	FROM GRP21, ELM01	J13	
	2		11	20	71	6			F	TO CAPSTAN MOTOR DRIVE AMP.		
	2		11	32	1	7			F	INPUT FROM GRP12, ELM05	J01	
			11	32	2	24			M	OUTPUT	P01	
			11	39	3	6			M	FROM GRP20, ELM71	P03	
			11	59	1	1			M	FROM GRP20, ELM14	P01	
			11	59	1	2			M	FROM GRP20, ELM14	P01	
*PSVTMOT	2		11	18	1	1			F	FROM GRP31, ELM01	J01	
	2		11	18	1	2			F	FROM GRP31, ELM01	J01	
	2		11	18	1	3			F	FROM GRP31, ELM01	J01	
	2		11	18	1	4			F	FROM GRP31, ELM01	J01	
	2		11	18	1	5			F	FROM GRP31, ELM01	J01	
	2		11	18	1	6			F	FROM GRP31, ELM01	J01	
	2		11	18	1	7			F	FROM GRP31, ELM01	J01	
	2		11	18	1	8			F	FROM GRP31, ELM01	J01	
	2		11	18	2	3			F	TO GRP33, ELM01	P01	
	2		11	18	2	6			F	TO GRP33, ELM01	P01	
	2		11	18	2	9			F	TO GRP33, ELM01	P01	
	2		11	18	2	12			F	TO GRP33, ELM01	P01	
	2		11	18	3	3			F	TO GRP30, ELM01	P02	
	2		11	18	3	6			F	TO GRP30, ELM01	P02	
	2		11	18	3	9			F	TO GRP30, ELM01	P02	
	2		11	18	3	12			F	TO GRP30, ELM01	P02	
			11	30	1	3			M	FROM GRP31, ELM01	J01	
			11	30	1	6			M	FROM GRP31, ELM01	J01	
			11	30	1	9			M	FROM GRP31, ELM01	J01	
			11	30	1	12			M	FROM GRP31, ELM01	J01	
			11	31	1	1			M	OUTPUT	P01	
			11	31	1	2			M	OUTPUT	P01	
			11	31	1	3			M	OUTPUT	P01	
			11	31	1	4			M	OUTPUT	P01	
			11	31	1	5			M	OUTPUT	P01	
			11	31	1	6			M	OUTPUT	P01	
			11	31	1	7			M	OUTPUT	P01	
			11	31	1	8			M	OUTPUT	P01	
			11	31	4	1			F	CONNECTOR TO CAPACITOR (GRP34)	P03	
			11	31	4	2			F	CONNECTOR TO CAPACITOR (GRP34)	P03	
			11	31	4	3			F	CONNECTOR TO CAPACITOR (GRP34)	P03	
			11	33	1	3			M	FROM GRP31, ELM01	J01	
			11	33	1	6			M	FROM GRP31, ELM01	J01	

-/-

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 93 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
<<- CONT.OF			11	33	1	9			M	FROM GRP31, ELM01	J01	
+PSVTMOT			11	33	1	12			M	FROM GRP31, ELM01	J01	
	2		11	34	1	1A			L	CAPACITOR		
	2		11	34	1	1B			L	CAPACITOR		
	2		11	34	1	1C			L	CAPACITOR		
	2		11	34	2	1			M	CONNECTOR (FROM GRP31)	J01	
	2		11	34	2	2			M	CONNECTOR (FROM GRP31)	J01	
	2		11	34	2	3			M	CONNECTOR (FROM GRP31)	J01	
*REKSUP	8		1	79	1	16				POWER CONNECTOR (24 PIN MOLEX FEM)		
	8		1	79	2	16				POWER CONNECTOR (24 PIN MOLEX MALE)		
	8		11	19	1	16			F	FROM GRP32, ELM02	J01	
	8		11	19	2	16			M	TO GRP21, ELM02	P01	
			11	20	16	5				PARALLEL REMOTE CONTROL	P16	
			11	20	16	6				PARALLEL REMOTE CONTROL	P16	
	8		11	20	62	10			U	WIRE FIELD		
	8		11	20	70	16			F	FROM GRP21, ELM01	J13	
			11	25	1	9			B	CONN. AUTODOCATOR, REMOTE TIMER	J01	
			11	26	1	2			M	FROM GRP27, ELM01	P01	
			11	26	2	8			M	TO GRP25, ELM01	P02	
			11	27	1	3			M	TO GRP26, ELM01	P01	
			11	27	2	5			M	FROM GRP20, ELM16	P02	
			11	27	2	6			M	FROM GRP20, ELM16	P02	
			11	32	2	16			M	OUTPUT	P01	
*STABIN	3		1	79	1	17				POWER CONNECTOR (24 PIN MOLEX FEM)		
	3		1	79	2	17				POWER CONNECTOR (24 PIN MOLEX MALE)		
	2		11	11	1	3			L	RECTIFIER	DZ01	70.01-0231
	2		11	12	1	1			L	CAPACITOR	C01	59.26.7103
	2		11	12	2	1			L	CAPACITOR	C02	59.26.7103
	2		11	12	5	1			M	CONNECTOR TO GRP32, ELM01	P01	
	2		11	12	5	4			M	CONNECTOR TO GRP32, ELM01	P01	
			11	32	1	1			F	INPUT FROM GRP12, ELM05	J01	
			11	32	1	4			F	INPUT FROM GRP12, ELM05	J01	
*STABSNS	3		11	19	1	17			F	FROM GRP32, ELM02	J01	
	3		11	19	2	17			M	TO GRP21, ELM02	P01	
			11	20	14	7				FUSE FAILURE DETECTOR	P14	
			11	20	14	8				FUSE FAILURE DETECTOR	P14	
	3		11	20	62	4			U	WIRE FIELD		
	3		11	20	70	17			F	FROM GRP21, ELM01	J13	
			11	32	2	17			M	OUTPUT	P01	
			11	59	1	7			M	FROM GRP20, ELM14	P01	
			11	59	1	8			M	FROM GRP20, ELM14	P01	
*VMOTLFT			11	33	3	1			J		P02	
	2		11	36	2	1				FROM GRP33, ELM 03		
*VPOTRHT			11	36	3	1			J		P02	
	2		11	37	2	1				FROM GRP30, ELM 03		
*YSUP			11	20	5	9				SPECLINE MOTOR SUPPLY	P05	
			11	20	43	12A				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.C0
			11	31	3	9				FROM GRP20, ELM05	P02	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 94 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
*0.0					1 70	1 23				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
					1 70	1 24				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
					1 70	1 25				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
					1 70	1 26				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
					1 74	1 5				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 6				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 7				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 8				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 9				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 10				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 11				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 12				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
					1 74	1 13				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
	J				1 79	1 5				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 79	1 6				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 79	1 8				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 79	1 9				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 79	1 10				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 75	1 13				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 79	1 14				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 79	1 21				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 75	1 22				POWER CONNECTOR (24 PIN MOLEX FEM)		
	0				1 79	2 5				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 6				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 8				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 9				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 10				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 13				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 14				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 21				POWER CONNECTOR (24 PIN MOLEX MALE)		
	0				1 79	2 22				POWER CONNECTOR (24 PIN MOLEX MALE)		
					1 79	3 7				CAGE PWR CONNECTOR (25 PIN D-SUB)		
					1 79	3 8				CAGE PWR CONNECTOR (25 PIN D-SUB)		
					1 79	3 9				CAGE PWR CONNECTOR (25 PIN D-SUB)		
					1 79	3 20				CAGE PWR CONNECTOR (25 PIN D-SUB)		
					1 79	3 21				CAGE PWR CONNECTOR (25 PIN D-SUB)		
					1 79	4 6				POWER CONNECTOR RACK (25 PIN D-SUB)		
					1 79	4 7				POWER CONNECTOR RACK (25 PIN D-SUB)		
					1 79	4 18				POWER CONNECTOR RACK (25 PIN D-SUB)		
					1 79	4 15				POWER CONNECTOR RACK (25 PIN D-SUB)		
					1 80	1 1A				CUE/PC DELAY		1.861.816.00
					1 80	1 1B				CUE/PC DELAY		1.861.816.00
					1 80	1 1C				CUE/PC DELAY		1.861.816.00
					1 80	1 15A				CUE/PC DELAY		1.861.816.00
					1 80	1 15B				CUE/PC DELAY		1.861.816.00
					1 80	1 15C				CUE/PC DELAY		1.861.816.00
					1 80	2 1A				PDM MODULATOR		1.861.811.00
					1 80	2 1B				PDM MODULATOR		1.861.811.00
					1 80	2 1C				PDM MODULATOR		1.861.811.00
					1 80	2 15A				PDM MODULATOR		1.861.811.00
					1 80	2 15B				PDM MODULATOR		1.861.811.00
					1 80	2 15C				PDM MODULATOR		1.861.811.00
					1 80	3 1A				PDM DEMODULATOR 1		1.861.812.00
					1 80	3 1B				PDM DEMODULATOR 1		1.861.812.00
					1 80	3 1C				PDM DEMODULATOR 1		1.861.812.00

./.

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 95 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
<< CONT.OF					1 80	3 15A				PDM DEMODULATOR 1		1.861.812.00
*0.0					1 80	3 15B				PDM DEMODULATOR 1		1.861.812.00
					1 80	3 15C				PDM DEMODULATOR 1		1.861.812.00
					1 80	4 1A				PDM DEMODULATOR 2		1.861.812.00
					1 80	4 1B				PDM DEMODULATOR 2		1.861.812.00
					1 80	4 1C				PDM DEMODULATOR 2		1.861.812.00
					1 80	4 15A				PDM DEMODULATOR 2		1.861.812.00
					1 80	4 15B				PDM DEMODULATOR 2		1.861.812.00
					1 80	4 15C				PDM DEMODULATOR 2		1.861.812.00
					1 80	5 1A				SPARE 1		1.861.815.00
					1 80	5 1B				SPARE 1		1.861.815.00
					1 80	5 1C				SPARE 1		1.861.815.00
					1 80	5 15A				SPARE 1		1.861.815.00
					1 80	5 15B				SPARE 1		1.861.815.00
					1 80	5 15C				SPARE 1		1.861.815.00
					1 80	6 1A				ANALOG ROUTING		1.861.814.00
					1 80	6 1B				ANALOG ROUTING		1.861.814.00
					1 80	6 1C				ANALOG ROUTING		1.861.814.00
					1 80	6 4C				ANALOG ROUTING		1.861.814.00
					1 80	6 15A				ANALOG ROUTING		1.861.814.00
					1 80	6 15B				ANALOG ROUTING		1.861.814.00
					1 80	6 15C				ANALOG ROUTING		1.861.814.00
					1 80	7 1A				PDM CONTROL		1.861.813.00
					1 80	7 1B				PDM CONTROL		1.861.813.00
					1 80	7 1C				PDM CONTROL		1.861.813.00
					1 80	7 15A				PDM CONTROL		1.861.813.00
					1 80	7 15B				PDM CONTROL		1.861.813.00
					1 80	7 15C				PDM CONTROL		1.861.813.00
					1 80	8 1A				DISPLAY INTERFACE		1.861.817.00
					1 80	8 1B				DISPLAY INTERFACE		1.861.817.00
					1 80	8 1C				DISPLAY INTERFACE		1.861.817.00
					1 80	8 15A				DISPLAY INTERFACE		1.861.817.00
					1 80	8 15B				DISPLAY INTERFACE		1.861.817.00
					1 80	8 15C				DISPLAY INTERFACE		1.861.817.00
					1 80	9 1A				SPARE 2		
					1 80	9 1B				SPARE 2		
					1 80	9 1C				SPARE 2		
					1 80	9 15A				SPARE 2		
					1 80	9 15B				SPARE 2		
					1 80	9 15C				SPARE 2		
					1 80	13 6				RACK PWR CONNECTOR (25 PIN D-SUB)		
					1 80	13 7				RACK PWR CONNECTOR (25 PIN D-SUB)		
					1 80	13 18				RACK PWR CONNECTOR (25 PIN D-SUB)		
					1 80	13 19				RACK PWR CONNECTOR (25 PIN D-SUB)		
					1 80	17 12				SIGNAL QUALITY DISPL. (25 PIN D-SUB)		
					1 80	17 13				SIGNAL QUALITY DISPL. (25 PIN D-SUB)		
					1 80	17 25				SIGNAL QUALITY DISPL. (25 PIN D-SUB)		
					1 80	18 6				DISPLAY PANEL/CCP (25 PIN D-SUB)		
					1 80	18 7				DISPLAY PANEL/CCP (25 PIN D-SUB)		
					1 80	18 8				DISPLAY PANEL/CCP (25 PIN D-SUB)		
					1 80	18 9				DISPLAY PANEL/CCP (25 PIN D-SUB)		
					1 80	18 10				DISPLAY PANEL/CCP (25 PIN D-SUB)		
					1 80	18 11				DISPLAY PANEL/CCP (25 PIN D-SUB)		
					1 80	18 12				DISPLAY PANEL/CCP (25 PIN D-SUB)		

./.

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 96 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFRNT NR.
<<-- CJNT.OF			1	8C	18	13				DISPLAY PANEL/CCP (25 PIN D-SUB)		
+0=3			1	8C	19	5				RACK-MONITOR PANEL (D-SUB CRIMP)		
			1	8C	19	6				RACK-MONITOR PANEL (D-SUB CRIMP)		
			1	8C	19	17				RACK-MONITOR PANEL (D-SUB CRIMP)		
			1	8C	19	18				RACK-MONITOR PANEL (D-SUB CRIMP)		
			1	8C	21	1				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	3				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	5				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	7				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	9				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	11				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	13				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	15				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	17				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	19				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	21				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	23				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	21	25				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			1	8C	22	1				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	3				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	5				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	7				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	9				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	11				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	13				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	15				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	17				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	19				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	21				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	23				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			1	8C	22	25				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			2	1	2	7				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	2	8				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	2	9				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	2	20				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	2	21				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	4	15A				DETECTOR		1.861.804.00
			2	1	4	15B				DETECTOR		1.861.804.00
			2	1	4	15C				DETECTOR		1.861.804.00
			2	1	5	15A				WRITE AMPLIFIER		1.861.803.00
			2	1	5	15B				WRITE AMPLIFIER		1.861.803.00
			2	1	5	15C				WRITE AMPLIFIER		1.861.803.00
			2	1	6	15A				TAPE DECK MONITOR		1.861.802.00
			2	1	6	15B				TAPE DECK MONITOR		1.861.802.00
			2	1	6	15C				TAPE DECK MONITOR		1.861.802.00
			2	1	7	15A				PLAYBACK AMPLIFIER		1.861.801.00
			2	1	7	15B				PLAYBACK AMPLIFIER		1.861.801.00
			2	1	7	15C				PLAYBACK AMPLIFIER		1.861.801.00
			2	3	1	18				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00
			2	3	1	19				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00
			2	3	1	20				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00
			2	3	1	21				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00
			2	4	2	1				INTERNAL PHCNE CONNECTOR J2 (CIS)		1.861.802.00
			2	4	2	6				INTERNAL PHCNE CONNECTOR J2 (CIS)		1.861.802.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 97 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFRNT NR.
<<-- CONT.OF			2	6	1	3				INTERNAL PHONE PLUG (SOLD.)		54.240.102.00
+0=0			3	1	1	5				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	6				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	7				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	8				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	9				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	10				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	11				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	12				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	1	13				CBUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
			3	1	2	14				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	1	2	16				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	1	2	18				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	1	2	20				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	1	2	22				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	1	2	24				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	1	2	26				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	2	1	5				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	6				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	7				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	8				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	9				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	10				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	11				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	12				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	1	13				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	2	5				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	6				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	7				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	8				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	9				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	10				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	11				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	12				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	2	13				CBUS DP PROCESSOR (D-SUB 25P F)		1.861.744.00
			3	2	4	1				POWER CCP KEYBOARD (FLATCABLE 10P)		1.861.744.00
			3	2	4	3				POWER CCP KEYBOARD (FLATCABLE 10P)		1.861.744.00
			3	2	4	5				POWER CCP KEYBOARD (FLATCABLE 10P)		1.861.744.00
			3	2	4	7				POWER CCP KEYBOARD (FLATCABLE 10P)		1.861.744.00
			3	2	4	9				POWER CCP KEYBOARD (FLATCABLE 10P)		1.861.744.00
			3	3	1	5				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
			3	3	1	6				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
			3	3	1	17				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
			3	3	1	18				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
			3	3	6	1				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.744.00
			3	3	6	3				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.744.00
			3	8	1	1				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
			3	8	1	3				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
			3	9	1	14				CATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
			3	9	1	16				CATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
			3	9	1	18				CATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
			3	9	1	20				CATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
			3	9	1	22				CATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
			3	9	1	24				CATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00

 * WILLI STUDER AG * S I G N A L * W I R E L I S T * * 66/12/08 * 10:54 * P A G E 98 *
 * *****
 * L-861-022-0C D820X PCM RECORDER * * 86/08/27 - 00 *
 * *****

SIGNAL NAME	COLOR	MI	ASY GRP	ELM PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFIN NR.
<<- CONT.OF			3 9	1 26				DATA DP PROC (FLTCAB. SOLC. 26P)		1.861.741.00
*G=0			3 10	2 1				POWER CCP TRANS. (FLTCAB.SOLD.10P)		1.861.744.00
			3 10	2 3				POWER CCP TRANS. (FLTCAB.SOLD.10P)		1.861.744.00
			3 10	2 5				POWER CCP TRANS. (FLTCAB.SOLD.10P)		1.861.744.00
			3 10	2 7				POWER CCP TRANS. (FLTCAB.SOLD.10P)		1.861.744.00
			5 3	1 18				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00
			5 3	1 19				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00
			5 3	1 20				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00
			5 3	1 21				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00
			11 20	32 1				TO ASSY1. GR80. EL21	P24	
			11 20	32 3				TO ASSY1. GR80. EL21	P24	
			11 20	32 5				TO ASSY1. GR80. EL21	P24	
			11 20	32 7				TO ASSY1. GR80. EL21	P24	
			11 20	32 9				TO ASSY1. GR80. EL21	P24	
			11 20	32 11				TO ASSY1. GR80. EL21	P24	
			11 20	32 13				TO ASSY1. GR80. EL21	P24	
			11 20	32 15				TO ASSY1. GR80. EL21	P24	
			11 20	32 17				TO ASSY1. GR80. EL21	P24	
			11 20	32 19				TO ASSY1. GR80. EL21	P24	
			11 20	32 21				TO ASSY1. GR80. EL21	P24	
			11 20	32 23				TO ASSY1. GR80. EL21	P24	
			11 20	32 25				TO ASSY1. GR80. EL21	P24	
			11 20	33 1				TO ASSY1. GR80. EL22	P25	
			11 20	33 3				TO ASSY1. GR80. EL22	P25	
			11 20	33 5				TO ASSY1. GR80. EL22	P25	
			11 20	33 7				TO ASSY1. GR80. EL22	P25	
			11 20	33 9				TO ASSY1. GR80. EL22	P25	
			11 20	33 11				TO ASSY1. GR80. EL22	P25	
			11 20	33 13				TO ASSY1. GR80. EL22	P25	
			11 20	33 15				TO ASSY1. GR80. EL22	P25	
			11 20	33 17				TO ASSY1. GR80. EL22	P25	
			11 20	33 19				TO ASSY1. GR80. EL22	P25	
			11 20	33 21				TO ASSY1. GR80. EL22	P25	
			11 20	33 23				TO ASSY1. GR80. EL22	P25	
			11 20	33 25				TO ASSY1. GR80. EL22	P25	
			11 20	51 16A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11 20	51 16B				MASTER SYSCON INTERFACE	J12	1.861.721.00

*G=0SENS	J		11 19	1 22			F	FRON GRP32. ELM02	J01	
	J		11 19	2 22			M	TO GRP21. ELM02	PD1	
	O		11 20	61 5			L	WIRE FIELD (FRON GRP20. ELM7G)		
	S		11 20	70 22			F	FRON GRP21. ELM01	J13	
			11 32	2 22			M	CUTPUT	PD1	

 * WILLI STUDER AG * S I G N A L * W I R E L I S T * * 66/12/08 * 10:54 * P A G E 99 *
 * *****
 * L-861-022-0C D820X PCM RECORDER * * 86/08/27 - 00 *
 * *****

SIGNAL NAME	COLOR	MI	ASY GRP	ELM PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFIN NR.
<<- CONT.OF			4 1	1 1B				ANALCG CUTPUT		1.861.751.00
*G=0			4 1	1 1C				ANALCG CUTPUT		1.861.751.00
			4 1	1 2A				ANALCG CUTPUT		1.861.751.00
			4 1	1 2B				ANALCG CUTPUT		1.861.751.00
			4 1	1 2C				ANALCG CUTPUT		1.861.751.00
			4 1	1 3A				ANALCG CUTPUT		1.861.751.00
			4 1	1 3B				ANALCG CUTPUT		1.861.751.00
			4 1	1 3C				ANALCG CUTPUT		1.861.751.00
			4 1	1 32A				ANALCG CUTPUT		1.861.751.00
			4 1	1 32B				ANALCG CUTPUT		1.861.751.00
			4 1	1 32C				ANALCG CUTPUT		1.861.751.00
			4 1	2 1A				ANALCG INPUT		1.861.752.00
			4 1	2 1B				ANALCG INPUT		1.861.752.00
			4 1	2 1C				ANALCG INPUT		1.861.752.00
			4 1	2 2A				ANALCG INPUT		1.861.752.00
			4 1	2 2B				ANALCG INPUT		1.861.752.00
			4 1	2 2C				ANALCG INPUT		1.861.752.00
			4 1	2 3A				ANALCG INPUT		1.861.752.00
			4 1	2 3B				ANALCG INPUT		1.861.752.00
			4 1	2 3C				ANALCG INPUT		1.861.752.00
			4 1	2 32A				ANALCG INPUT		1.861.752.00
			4 1	2 32B				ANALCG INPUT		1.861.752.00
			4 1	2 32C				ANALCG INPUT		1.861.752.00
			4 1	3 1A				SPARE 1		
			4 1	3 1B				SPARE 1		
			4 1	3 1C				SPARE 1		
			4 1	3 2A				SPARE 1		
			4 1	3 2B				SPARE 1		
			4 1	3 2C				SPARE 1		
			4 1	3 3A				SPARE 1		
			4 1	3 3B				SPARE 1		
			4 1	3 3C				SPARE 1		
			4 1	3 30A				SPARE 1		
			4 1	3 30B				SPARE 1		
			4 1	3 30C				SPARE 1		
			4 1	3 31A				SPARE 1		
			4 1	3 31B				SPARE 1		
			4 1	3 31C				SPARE 1		
			4 1	3 32A				SPARE 1		
			4 1	3 32B				SPARE 1		
			4 1	3 32C				SPARE 1		
			4 1	4 1A				GAINS CONTROL		1.861.853.00
			4 1	4 1B				GAINS CONTROL		1.861.853.00
			4 1	4 1C				GAINS CONTROL		1.861.853.00
			4 1	4 2A				GAINS CONTROL		1.861.853.00
			4 1	4 2B				GAINS CONTROL		1.861.853.00
			4 1	4 2C				GAINS CONTROL		1.861.853.00
			4 1	4 3A				GAINS CONTROL		1.861.853.00
			4 1	4 3B				GAINS CONTROL		1.861.853.00
			4 1	4 3C				GAINS CONTROL		1.861.853.00
			4 1	4 30A				GAINS CONTROL		1.861.853.00
			4 1	4 30B				GAINS CONTROL		1.861.853.00
			4 1	4 30C				GAINS CONTROL		1.861.853.00
			4 1	4 31A				GAINS CONTROL		1.861.853.00

* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 104 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

Table with columns: SIGNAL NAME, COLOR, MI, ASY GRP, ELM PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, FLEMFT NR. Rows include components like POWER SUPPLY, DETECTOR, WRITE AMPLIFIER, and HEADBLOCK READ.

* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 105 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

Table with columns: SIGNAL NAME, COLOR, MI, ASY GRP, ELM PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, FLEMFT NR. Rows include components like PDM DEMODULATOR, ANALOG ROUTING, and various motor drives.

* WILLI STUDER AG * SIGNAL WIRE LIST * 86/12/08 * 10:54 * PAGE 108 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - CO *****

Table with columns: SIGNAL NAME, COLOR, MI, ASY GRP, ELM, PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, ELEMENT NR. Rows include +20PC, +24.0, +24.0L, +24.0REM, +26.0.

* WILLI STUDER AG * SIGNAL WIRE LIST * 86/12/08 * 10:54 * PAGE 109 *
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - CO *****

Table with columns: SIGNAL NAME, COLOR, MI, ASY GRP, ELM, PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, ELEMENT NR. Rows include +5.0, +5.6.


```
*****  
* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 112 *  
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *  
*****
```

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLM/FMT NR.
<<--- CONT.OF +5V-			4	1	3	26C				SPARE		
			4	1	4	5A				GAINS CONTROL		1.861.853.00
			4	1	4	5B				GAINS CONTROL		1.861.853.00
			4	1	4	5C				GAINS CONTROL		1.861.853.00
			4	1	4	6A				GAINS CONTROL		1.861.853.00
			4	1	4	6B				GAINS CONTROL		1.861.853.00
			4	1	4	6C				GAINS CONTROL		1.861.853.00
			4	1	4	27A				GAINS CONTROL		1.861.853.00
			4	1	4	27B				GAINS CONTROL		1.861.853.00
			4	1	4	27C				GAINS CONTROL		1.861.853.00
			4	1	4	28A				GAINS CONTROL		1.861.853.00
			4	1	4	28B				GAINS CONTROL		1.861.853.00
			4	1	4	28C				GAINS CONTROL		1.861.853.00
			4	1	5	5A				DAPRC INTERFACE		1.861.854.00
			4	1	5	5B				DAPRC INTERFACE		1.861.854.00
			4	1	5	5C				DAPRC INTERFACE		1.861.854.00
			4	1	5	6A				DAPRC INTERFACE		1.861.854.00
			4	1	5	6B				DAPRC INTERFACE		1.861.854.00
			4	1	5	6C				DAPRC INTERFACE		1.861.854.00
			4	1	5	27A				DAPRC INTERFACE		1.861.854.00
			4	1	5	27B				DAPRC INTERFACE		1.861.854.00
			4	1	5	27C				DAPRC INTERFACE		1.861.854.00
			4	1	5	28A				DAPRC INTERFACE		1.861.854.00
			4	1	5	28B				DAPRC INTERFACE		1.861.854.00
			4	1	5	28C				DAPRC INTERFACE		1.861.854.00
			4	1	6	5A				DATA PROCESSOR		1.861.855.00
			4	1	6	5B				DATA PROCESSOR		1.861.855.00
			4	1	6	5C				DATA PROCESSOR		1.861.855.00
			4	1	6	6A				DATA PROCESSOR		1.861.855.00
			4	1	6	6B				DATA PROCESSOR		1.861.855.00
			4	1	6	6C				DATA PROCESSOR		1.861.855.00
			4	1	6	27A				DATA PROCESSOR		1.861.855.00
			4	1	6	27B				DATA PROCESSOR		1.861.855.00
			4	1	6	27C				DATA PROCESSOR		1.861.855.00
			4	1	6	28A				DATA PROCESSOR		1.861.855.00
			4	1	6	28B				DATA PROCESSOR		1.861.855.00
			4	1	6	28C				DATA PROCESSOR		1.861.855.00
			4	1	7	5A				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	5B				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	5C				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	6A				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	6B				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	6C				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	27A				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	27B				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	27C				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	28A				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	28B				COEFFICIENT GENERATOR		1.861.856.00
			4	1	7	28C				COEFFICIENT GENERATOR		1.861.856.00
			4	1	8	5A				CODEC CONTROL		1.861.857.00
			4	1	8	5B				CODEC CONTROL		1.861.857.00
			4	1	8	5C				CODEC CONTROL		1.861.857.00
			4	1	8	6A				CODEC CONTROL		1.861.857.00
			4	1	8	6B				CODEC CONTROL		1.861.857.00

```
*****  
* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 113 *  
* 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *  
*****
```

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
<<--- CONT.OF +5V-			4	1	8	6C				CODEC CONTROL		1.861.857.00
			4	1	8	27A				CODEC CONTROL		1.861.857.00
			4	1	8	27B				CODEC CONTROL		1.861.857.00
			4	1	8	27C				CODEC CONTROL		1.861.857.00
			4	1	8	28A				CODEC CONTROL		1.861.857.00
			4	1	8	28B				CODEC CONTROL		1.861.857.00
			4	1	8	28C				CODEC CONTROL		1.861.857.00
			4	1	9	5A				CODEC MEMORY		1.861.858.00
			4	1	9	5B				CODEC MEMORY		1.861.858.00
			4	1	9	5C				CODEC MEMORY		1.861.858.00
			4	1	9	6A				CODEC MEMORY		1.861.858.00
			4	1	9	6B				CODEC MEMORY		1.861.858.00
			4	1	9	6C				CODEC MEMORY		1.861.858.00
			4	1	9	27A				CODEC MEMORY		1.861.858.00
			4	1	9	27B				CODEC MEMORY		1.861.858.00
			4	1	9	27C				CODEC MEMORY		1.861.858.00
			4	1	9	28A				CODEC MEMORY		1.861.858.00
			4	1	9	28B				CODEC MEMORY		1.861.858.00
			4	1	9	28C				CODEC MEMORY		1.861.858.00
			4	1	10	5A				TRANSFORMATTER		1.861.859.00
			4	1	10	5B				TRANSFORMATTER		1.861.859.00
			4	1	10	5C				TRANSFORMATTER		1.861.859.00
			4	1	10	6A				TRANSFORMATTER		1.861.859.00
			4	1	10	6B				TRANSFORMATTER		1.861.859.00
			4	1	10	6C				TRANSFORMATTER		1.861.859.00
			4	1	10	27A				TRANSFORMATTER		1.861.859.00
			4	1	10	27B				TRANSFORMATTER		1.861.859.00
			4	1	10	27C				TRANSFORMATTER		1.861.859.00
			4	1	10	28A				TRANSFORMATTER		1.861.859.00
			4	1	10	28B				TRANSFORMATTER		1.861.859.00
			4	1	10	28C				TRANSFORMATTER		1.861.859.00
			4	1	11	5A				RUN PROCESSOR		1.861.860.00
			4	1	11	5B				RUN PROCESSOR		1.861.860.00
			4	1	11	5C				RUN PROCESSOR		1.861.860.00
			4	1	11	6A				RUN PROCESSOR		1.861.860.00
			4	1	11	6B				RUN PROCESSOR		1.861.860.00
			4	1	11	6C				RUN PROCESSOR		1.861.860.00
			4	1	11	27A				RUN PROCESSOR		1.861.860.00
			4	1	11	27B				RUN PROCESSOR		1.861.860.00
			4	1	11	27C				RUN PROCESSOR		1.861.860.00
			4	1	11	28A				RUN PROCESSOR		1.861.860.00
			4	1	11	28B				RUN PROCESSOR		1.861.860.00
			4	1	11	28C				RUN PROCESSOR		1.861.860.00
			4	1	12	5A				RT/TC CCDFC		1.861.861.00
			4	1	12	5B				RT/TC CCDFC		1.861.861.00
			4	1	12	5C				RT/TC CCDFC		1.861.861.00
			4	1	12	6A				RT/TC CCDFC		1.861.861.00
			4	1	12	6B				RT/TC CCDFC		1.861.861.00
			4	1	12	6C				RT/TC CCDFC		1.861.861.00
			4	1	12	27A				RT/TC CCDFC		1.861.861.00
			4	1	12	27B				RT/TC CCDFC		1.861.861.00
			4	1	12	27C				RT/TC CCDFC		1.861.861.00
			4	1	12	28A				RT/TC CCDFC		1.861.861.00
			4	1	12	28B				RT/TC CCDFC		1.861.861.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 114 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELFMNT NR.
<<--- CONT.OF			4	1	12	28C				RTJTC CDEFC		1.861.861.00
+5V-			4	1	13	5A				TIMING + TEST		1.861.862.00
			4	1	13	5B				TIMING + TEST		1.861.862.00
			4	1	13	5C				TIMING + TEST		1.861.862.00
			4	1	13	6A				TIMING + TEST		1.861.862.00
			4	1	13	6B				TIMING + TEST		1.861.862.00
			4	1	13	6C				TIMING + TEST		1.861.862.00
			4	1	13	27A				TIMING + TEST		1.861.862.00
			4	1	13	27B				TIMING + TEST		1.861.862.00
			4	1	13	27C				TIMING + TEST		1.861.862.00
			4	1	13	28A				TIMING + TEST		1.861.862.00
			4	1	13	28B				TIMING + TEST		1.861.862.00
			4	1	13	28C				TIMING + TEST		1.861.862.00
			4	1	14	5A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	5B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	5C				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	6A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	6B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	6C				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	27A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	27B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	27C				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	28A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	28B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	14	28C				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	5A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	5B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	5C				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	6A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	6B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	6C				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	27A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	27B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	27C				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	28A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	28B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	15	28C				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	23	6A				POWER SUPPLY		1.861.515.00
			4	1	23	6B				POWER SUPPLY		1.861.515.00
			4	1	23	6C				POWER SUPPLY		1.861.515.00
			4	1	23	8A				POWER SUPPLY		1.861.515.00
			4	1	23	8B				POWER SUPPLY		1.861.515.00
			4	1	23	8C				POWER SUPPLY		1.861.515.00
			4	1	23	26A				POWER SUPPLY		1.861.515.00
			4	1	23	26B				POWER SUPPLY		1.861.515.00
			4	1	23	26C				POWER SUPPLY		1.861.515.00
			4	1	23	28A				POWER SUPPLY		1.861.515.00
			4	1	23	28B				POWER SUPPLY		1.861.515.00
			4	1	23	28C				POWER SUPPLY		1.861.515.00

-PSVTHOT			11	18	1	5			F	FROM GRP31. ELM01	J01	
			11	18	1	10			F	FROM GRP31. ELM01	J01	
			11	18	1	11			F	FROM GRP31. ELM01	J01	
			11	18	1	12			F	FROM GRP31. ELM01	J01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 115 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELFMNT NR.
<<--- CONT.OF			11	18	1	13			F	FROM GRP31. ELM01	J01	
-PSVTHOT			11	18	1	14			F	FROM GRP31. ELM01	J01	
			11	18	1	15			F	FROM GRP31. ELM01	J01	
			11	18	1	16			F	FROM GRP31. ELM01	J01	
			11	18	2	2			F	TO GRP33. ELM01	P01	
			11	18	2	5			F	TO GRP33. ELM01	P01	
			11	18	2	8			F	TO GRP33. ELM01	P01	
			11	18	2	11			F	TO GRP33. ELM01	P01	
			11	18	3	2			F	TO GRP30. ELM01	P02	
			11	18	3	5			F	TO GRP30. ELM01	P02	
			11	18	3	8			F	TO GRP30. ELM01	P02	
			11	18	3	11			F	TO GRP30. ELM01	P02	
			11	30	1	2			M	FROM GRP31. ELM01	J01	
			11	30	1	5			M	FROM GRP31. ELM01	J01	
			11	30	1	8			M	FROM GRP31. ELM01	J01	
			11	30	1	11			M	FROM GRP31. ELM01	J01	
			11	31	1	9			M	OUTPUT	P01	
			11	31	1	10			M	OUTPUT	P01	
			11	31	1	11			M	OUTPUT	P01	
			11	31	1	12			M	OUTPUT	P01	
			11	31	1	13			M	OUTPUT	P01	
			11	31	1	14			M	OUTPUT	P01	
			11	31	1	15			M	OUTPUT	P01	
			11	31	1	16			M	OUTPUT	P01	
			11	31	4	4			F	CONNECTOR TO CAPACITOR (GRP34)	P03	
			11	31	4	5			F	CONNECTOR TO CAPACITOR (GRP34)	P03	
			11	31	4	6			F	CONNECTOR TO CAPACITOR (GRP34)	P03	
			11	33	1	2			M	FROM GRP31. ELM01	J01	
			11	33	1	5			M	FROM GRP31. ELM01	J01	
			11	33	1	8			M	FROM GRP31. ELM01	J01	
			11	33	1	11			M	FROM GRP31. ELM01	J01	
			11	34	1	2A			L	CAPACITOR		
			11	34	1	2C			L	CAPACITOR		
			11	34	2	4			M	CONNECTOR (FROM GRP31)	J01	
			11	34	2	5			M	CONNECTOR (FROM GRP31)	J01	
			11	34	2	6			M	CONNECTOR (FROM GRP31)	J01	

WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G F 116 *
* 1.861.022.00 DB20X PCM RECORDER * 86/08/27 - 00 *

Table with columns: SIGNAL NAME, COLOR, MI, ASY, GRP, ELM, PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, ELEMNT NR. Rows include -VMDTRHT, -YSUP, -10, and -15.0.

* WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G F 117 *
* 1.861.022.00 DB20X PCM RECORDER * 86/08/27 - 00 *

Table with columns: SIGNAL NAME, COLOR, MI, ASY, GRP, ELM, PNT, S, LV, TYPE, DESCRIPTION OF ELEMENT, REMARK, ELEMNT NR. Rows include <<- CONT.OF, -15.0, and various signal names like 1 80 6 14B.

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 118 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	RFMARK	ELEMNT NR.
<<- CONT.OF -15.0			11	20	43	188				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	46	22				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	22				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	47	22				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	20	48	18A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	48	18B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	50	22				SMPTE/EBU INTERFACE	J11	1.820.751.00
	6		11	20	61	9			L	WIRE FIELD (FROM GRP20, ELM70)		
	6		11	20	70	12			F	FROM GRP21, ELM01	J13	
			11	30	2	6				FROM GRP20, ELM02	P01	
			11	31	3	6				FROM GRP20, ELM05	P02	
			11	32	2	12			M	OUTPUT	P01	
			11	33	2	6				FROM GRP20, ELM01	P01	
			11	36	1	6				TACHO SENSOR	P01	1.820.771.00
			11	37	1	6				TACHO SENSOR	P01	1.820.771.00
			11	39	1	6				FROM GRP20, ELM03	P01	
			11	39	2	5			M	TO GRP38, ELM01	P02	
			11	42	1	6				FROM GRP20, ELM12	P01	
		11	43	1	6				FROM GRP20, ELM13	P01		
		11	44	1	6				FROM GRP20, ELM06	P01		
		11	45	1	6				FROM GRP20, ELM11	P01		
		11	59	1	13				FROM GRP20, ELM14	P01		
-20			4	1	1	11A				ANALCG OUTPUT		1.861.751.00
			4	1	1	11B				ANALCG OUTPUT		1.861.751.00
			4	1	1	11C				ANALCG OUTPUT		1.861.751.00
			4	1	2	11A				ANALCG INPUT		1.861.752.00
			4	1	2	11B				ANALCG INPUT		1.861.752.00
			4	1	2	11C				ANALCG INPUT		1.861.752.00
			4	1	4	22A				GAINS CONTROL		1.861.853.00
			4	1	12	14A				RT/TC CDEEC		1.861.861.00
			4	1	12	14B				RT/TC CDEEC		1.861.861.00
			4	1	12	14C				RT/TC CDEEC		1.861.861.00
			4	1	13	11A				TIMING + TEST		1.861.862.00
			4	1	13	11B				TIMING + TEST		1.861.862.00
			4	1	13	11C				TIMING + TEST		1.861.862.00
			4	1	14	29A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	29A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	23	18A				POWER SUPPLY		1.861.515.00
			4	1	23	18B				POWER SUPPLY		1.861.515.00
			4	1	23	18C				POWER SUPPLY		1.861.515.00
-26.0	9		1	79	1	19				POWER CONNECTOR (24 PIN MOLEX FFM)		
	9		1	79	2	19				POWER CONNECTOR (24 PIN MOLEX MALE)		
	9		11	19	1	19			F	FROM GRP32, ELM02	J01	
	9		11	19	2	19			M	TO GRP21, ELM02	P01	
			11	20	7	6				TAPE LIFT MOTOR, LEFT	P07	
			11	20	8	6				TAPE LIFT MOTOR, RIGHT	P08	
			11	20	14	16				FUSE FAILURE DETECTOR	P14	
	9		11	20	61	1			L	WIRE FIELD (FROM GRP20, ELM70)		
	9		11	20	70	19			F	FROM GRP21, ELM01	J13	
			11	32	2	19			M	OUTPUT	P01	
			11	46	1	6				FROM GRP20, ELM07	P01	
			11	47	1	6				FROM GRP20, ELM08	P01	
			11	59	1	16				FROM GRP20, ELM14	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 119 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	RFMARK	ELEMNT NR.
ACPWE-A1	6		11	9	3	14			Y	SECONDARY 1		1.820.523.00
	6		11	10	1	1			L	FUSE	F01	52.03.0106
	6		11	11	4	1A			K	DISTRIBUTOR		52.01.0101
	6		11	11	4	1B			K	DISTRIBUTOR		52.01.0101
ACPWE-A2	6		11	9	3	13			Y	SECONDARY 1		1.820.523.00
	6		11	11	4	1D			K	DISTRIBUTOR		52.01.0101
ACPWE-A3	6		11	9	3	12			Y	SECONDARY 1		1.820.523.00
	6		11	11	4	1C			K	DISTRIBUTOR		52.01.0101
ACPWE-A4	1		11	9	3	19			Y	SECONDARY 1		1.820.523.00
	1		11	10	2	1			L	FUSE	F02	52.03.0106
	1		11	11	4	5A			K	DISTRIBUTOR		52.01.0101
ACPWE-A5	1		11	11	4	5B			K	DISTRIBUTOR		52.01.0101
	1		11	9	3	10			Y	SECONDARY 1		1.820.523.00
ACPWE-A6	1		11	11	4	5D			K	DISTRIBUTOR		52.01.0101
	7		11	9	3	9			Y	SECONDARY 1		1.820.523.00
ACPWE-A6	7		11	10	3	1			L	FUSE	F03	52.03.0106
	5		11	9	4	15			Y	SECONDARY 2		1.820.524.00
ACPWE-B1	5		11	11	1	2			L	RECTIFIER	D201	70.01.0231
	5		11	11	4	3A			K	DISTRIBUTOR		52.01.0101
	5		11	11	4	3C			K	DISTRIBUTOR		52.01.0101
	5		11	11	4	3D			K	DISTRIBUTOR		52.01.0101
	5		11	11	4	4B			K	DISTRIBUTOR		52.01.0101
	5		11	11	4	4C			K	DISTRIBUTOR		52.01.0101
	5		11	12	5	12			M	CONNECTOR TO GRP32, ELM01	P01	
	5		11	32	1	12			F	INPUT FROM GRP12, ELM05	J01	
ACPWE-B2	5		11	9	4	16			Y	SECONDARY 2		1.820.524.00
	5		11	11	4	3B			K	DISTRIBUTOR		52.01.0101
ACPWE-B3	5		11	9	4	17			Y	SECONDARY 2		1.820.524.00
	5		11	11	4	4D			K	DISTRIBUTOR		52.01.0101
ACPWE-B4	4		11	9	4	18			Y	SECONDARY 2		1.820.524.00
	4		11	11	2	2			L	RECTIFIER	D202	70.01.0231
	4		11	11	4	6C			K	DISTRIBUTOR		52.01.0101
	4		11	11	4	6D			K	DISTRIBUTOR		52.01.0101
ACPWE-B5	4		11	9	4	19			Y	SECONDARY 2		1.820.524.00
	4		11	11	4	6A			K	DISTRIBUTOR		52.01.0101
ACPWE-B6	0		11	9	4	20			Y	SECONDARY 2		1.820.524.00
	0		11	11	3	2			L	RECTIFIER	D203	70.01.0231
ACPWE-C1	0		11	9	3	15			Y	SECONDARY 1		1.820.523.00
	0		11	9	4	14			Y	SECONDARY 2		1.820.524.00
ACPWE-C2	0		11	9	3	16			Y	SECONDARY 1		1.820.523.00
	0		11	9	4	13			Y	SECONDARY 2		1.820.524.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 120 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
ACPWE-C3	J		11	9	3	17			Y	SECONDARY 1		1.820.523-C3
	0		11	9	4	12			Y	SECONDARY 2		1.820.524-C0
ACPWE-C4	J		11	9	3	18			Y	SECONDARY 1		1.820.523-C0
	0		11	9	4	11			Y	SECONDARY 2		1.820.524-C0
ACPWE-C5	0		11	9	3	19			Y	SECONDARY 1		1.820.523-C0
	J		11	9	4	10			Y	SECONDARY 2		1.820.524-C0
ACPWE-C6	0		11	9	3	20			Y	SECONDARY 1		1.820.523-C0
	0		11	9	4	9			Y	SECONDARY 2		1.820.524-C0
ACPWE-D1	9		11	10	1	2			L	FUSE	F01	53.03.0106
	9		11	11	1	1			L	RECTIFIER	OZ01	70.C1.0231
	9		11	11	4	2A			K	DISTRIBUTOR		52.01.0101
	9		11	11	4	2B			K	DISTRIBUTOR		52.01.0101
	9		11	11	4	2C			K	DISTRIBUTOR		52.01.0101
	9		11	12	5	10			M	CONNECTOR TO GRP32, ELMC1	P01	52.01.0101
	9		11	32	1	1C			F	INPUT FROM GRP12, ELM05	J01	
ACPWE-D4	5		11	10	2	2			L	FUSE	F02	53.03.0106
	5		11	11	2	1			L	RECTIFIER	OZ02	70.C1.0231
ACPWE-D6	0		11	10	3	2			L	FUSE	F03	53.03.0106
	0		11	11	3	1			L	RECTIFIER	OZ03	70.C1.0231
ACPWM-A1	1		11	8	3	14			Y	SECONDARY 1		1.820.523-C0
	1		11	8	5	1			M	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	1			F	FROM GRP08, ELM05	J01	
ACPWM-A2	2		11	8	3	13			Y	SECONDARY 1		1.820.523-C0
	2		11	8	5	2			M	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	4			F	FROM GRP08, ELM05	J01	
ACPWM-A3	3		11	8	3	12			Y	SECONDARY 1		1.820.523-C0
	3		11	8	5	3			M	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	2			F	FROM GRP08, ELM05	J01	
ACPWM-A4	4		11	8	3	11			Y	SECONDARY 1		1.820.523-C0
	4		11	8	5	4			M	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	5			F	FROM GRP08, ELM05	J01	
ACPWM-A5	5		11	8	3	10			Y	SECONDARY 1		1.820.523-C0
	5		11	8	5	5			M	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	3			F	FROM GRP08, ELM05	J01	
ACPWM-A6	6		11	8	3	9			Y	SECONDARY 1		1.820.523-C0
	6		11	8	5	6			M	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	6			F	FROM GRP08, ELM05	J01	
ACPWM-D1	9		11	8	4	15			Y	SECONDARY 2		1.820.524-C0
	9		11	8	5	7			F	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	7			M	FROM GRP08, ELM05	J01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 121 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
ACPWM-B2	9		11	8	4	16			Y	SECONDARY 2		1.820.524-C0
	9		11	8	5	8			F	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	8			M	FROM GRP08, ELM05	J01	
ACPWM-B3	9		11	8	4	17			Y	SECONDARY 2		1.820.524-C0
	9		11	8	5	9			F	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	9			M	FROM GRP08, ELM05	J01	
ACPWM-B4	9		11	8	4	18			Y	SECONDARY 2		1.820.524-C0
	9		11	8	5	10			F	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	10			M	FROM GRP08, ELM05	J01	
ACPWM-B5	9		11	8	4	19			Y	SECONDARY 2		1.820.524-C0
	9		11	8	5	11			F	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	11			M	FROM GRP08, ELM05	J01	
ACPWM-B6	9		11	8	4	20			Y	SECONDARY 2		1.820.524-C0
	9		11	8	5	12			F	CONNECTOR TO SPOOLING MOTOR SUPPLY		
			11	31	2	12			M	FROM GRP08, ELM05	J01	
ACPWM-C1	0		11	8	3	15			Y	SECONDARY 1		1.820.523-C0
	0		11	8	4	14			Y	SECONDARY 2		1.820.524-C0
ACPWM-C2	0		11	8	3	16			Y	SECONDARY 1		1.820.523-C0
	0		11	8	4	13			Y	SECONDARY 2		1.820.524-C0
ACPWM-C3	0		11	8	3	17			Y	SECONDARY 1		1.820.523-C0
	0		11	8	4	12			Y	SECONDARY 2		1.820.524-C0
ACPWM-C4	0		11	8	3	18			Y	SECONDARY 1		1.820.523-C0
	0		11	8	4	11			Y	SECONDARY 2		1.820.524-C0
ACPWM-C5	0		11	8	3	19			Y	SECONDARY 1		1.820.523-C0
	0		11	8	4	10			Y	SECONDARY 2		1.820.524-C0
ACPWM-C6	0		11	8	3	20			Y	SECONDARY 1		1.820.523-C0
	0		11	8	4	9			Y	SECONDARY 2		1.820.524-C0
ADBCLKA			4	1	2	7A				ANALG INPUT		1.861.752-C0
			4	1	5	15A				DAPRC INTERFACE		1.861.854-C0
ADGCLIP1			4	1	2	25A				ANALG INPUT		1.861.752-C0
			4	1	4	24C				GAINS CNTRCL		1.861.853-C0
			4	1	6	22A				DATA PRCESSOR		1.861.855-C0
			4	1	6	24B				DATA PRCESSOR		1.861.855-C0
ADGCLIP2			4	1	2	25C				ANALG INPUT		1.861.752-C0
			4	1	4	25B				GAINS CNTRCL		1.861.853-C0
			4	1	6	22C				DATA PRCESSOR		1.861.855-C0
			4	1	6	24C				DATA PRCESSOR		1.861.855-C0
ADDAT1			4	1	2	30A				ANALG INPUT		1.861.752-C0
			4	1	5	16B				DAPRC INTERFACE		1.861.854-C0
ADDAT2			4	1	2	29A				ANALG INPUT		1.861.752-C0
			4	1	5	17A				DAPRC INTERFACE		1.861.854-C0

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 122 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEHNT NR.
ACIBCLKA			4	1	2	7C				ANALCG INPUT		1.861.752.00
			4	1	5	15B				DAPRC INTERFACE		1.861.854.00
ADIDAT1			4	1	2	30B				ANALCG INPUT		1.861.752.00
			4	1	5	16C				DAPRC INTERFACE		1.861.854.00
ADIDAT2			4	1	2	29B				ANALCG INPUT		1.861.752.00
			4	1	5	17B				DAPRC INTERFACE		1.861.854.00
ADISTART			4	1	2	8C				ANALCG INPUT		1.861.752.00
			4	1	5	16A				DAPRC INTERFACE		1.861.854.00
ADIVALID			4	1	2	31B				ANALCG INPUT		1.861.752.00
			4	1	5	14C				DAPRC INTERFACE		1.861.854.00
ADSTART			4	1	2	8A				ANALCG INPUT		1.861.752.00
			4	1	5	15C				DAPRC INTERFACE		1.861.854.00
ADTC			4	1	10	17A				TRANSFORMATTER		1.861.855.00
			4	1	11	17A				RUN PROCESSOR		1.861.860.00
ADT1			4	1	10	17C				TRANSFORMATTER		1.861.855.00
			4	1	11	17C				RUN PROCESSOR		1.861.860.00
ACT2			4	1	10	18A				TRANSFORMATTER		1.861.855.00
			4	1	11	18A				RUN PROCESSOR		1.861.860.00
ACT3			4	1	10	18C				TRANSFORMATTER		1.861.855.00
ADVALID			4	1	2	31A				ANALCG INPUT		1.861.752.00
			4	1	5	14B				DAPRC INTERFACE		1.861.854.00
AESGND1			4	1	19	3				CONNECTOR 4	(TC+AES+BNC)	
			4	3	6	1				DIGITAL INPUT (DI)	(XLR)	
			4	3	23	2				DIGITAL I/O	(CIS)	1.861.775.00
AESGND0			4	1	19	1				CONNECTOR 4	(TC+AES+BNC)	
			4	3	5	1				DIGITAL OUTPUT (DO)	(XLR)	
			4	3	23	5				DIGITAL I/O	(CIS)	1.861.775.00
AESIIN			4	1	4	14C				GAINS CONTROL		1.861.853.00
			4	1	5	13C				DAPRC INTERFACE		1.861.854.00
			4	1	5	24C				DAPRC INTERFACE		1.861.854.00
			4	1	13	15B				TIMING + TEST		1.861.862.00
			4	1	19	17				CONNECTOR 4	(TC+AES+BNC)	
			4	3	6	3				DIGITAL INPUT (DI)	(XLR)	
AESIN			4	3	23	4				DIGITAL I/O	(CIS)	1.861.775.00
			4	1	4	16B				GAINS CONTROL		1.861.853.00
			4	1	5	17C				DAPRC INTERFACE		1.861.854.00
			4	1	5	24B				DAPRC INTERFACE		1.861.854.00
			4	1	13	15A				TIMING + TEST		1.861.862.00
			4	1	19	16				CONNECTOR 4	(TC+AES+BNC)	
		4	3	6	2				DIGITAL INPUT (DI)	(XLR)		
		4	3	23	3				DIGITAL I/O	(CIS)	1.861.775.00	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 123 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEHNT NR.
AESI01			4	1	5	24A				DAPRC INTERFACE		1.861.854.00
			4	1	19	15				CONNECTOR 4	(TC+AES+BNC)	
			4	3	5	3				DIGITAL OUTPUT (DO)	(XLR)	
			4	3	23	7				DIGITAL I/O	(CIS)	1.861.775.00
AES01			4	1	5	23C				DAPRC INTERFACE		1.861.854.00
			4	1	19	14				CONNECTOR 4	(TC+AES+BNC)	
			4	3	5	2				DIGITAL OUTPUT (DO)	(XLR)	
			4	3	23	6				DIGITAL I/O	(CIS)	1.861.775.00
AN-CSPOC			11	20	3	7				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	20	42	3A				CAPSTAN INTERFACE	J03	1.820.777.00
			11	20	42	3B				CAPSTAN INTERFACE	J03	1.820.777.00
			11	39	1	7				FROM GRP20, ELM03	P01	
AN-ICL			11	20	40	26				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	20	47	3				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
AN-ICLD			11	20	1	13				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	3				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	13				FROM GRP20, ELM01	P01	
AN-ICR			11	20	40	1				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	20	40	3				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	20	47	4				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
AN-ICRD			11	20	2	13				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	9				SPOOLING MOTOR DRIVER	J01	
			11	30	2	13				FROM GRP20, ELM02	P01	1.820.759.00
AN-IRL			11	20	40	27				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	20	45	6				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
AN-IRR			11	20	40	2				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	20	40	4				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	20	45	8				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
AN-RES1			11	20	9	7				TACHO SENSOR (SPOOLING M. LEFT)	P09	
			11	20	47	7				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	36	1	7				TACHO SENSOR	P01	1.820.771.00
AN-RES2			11	20	10	7				TACHO SENSOR (SPOOLING M. RIGHT)	P10	
			11	20	47	8				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	37	1	7				TACHO SENSOR	P01	1.820.771.00
AN-RES3			11	20	11	7				MOVE SENSOR	P11	
			11	20	47	9				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	45	1	7				FROM GRP20, ELM11	P01	
AN-RES4			11	20	47	10				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
AN-TTL			11	20	12	9				TAPE TENSION SENSOR, LEFT	P12	
			11	20	45	1				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	45	3				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	47	1				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 124 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
<<-- CONT.OF			11	20	47	5				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
AN-TTL			11	42	1	9				FROM GRF20, ELM12	P01	
AN-TTR			11	20	13	9				TAPE TENSION SENSOR, RIGHT	P13	
			11	20	45	2				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	45	4				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	47	2				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	20	47	6				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
			11	43	1	9				FROM GRF20, ELM13	P01	
ANA-GND			4	1	1	13A				ANALCG OUTPUT		1.861.751.00
			4	1	1	13B				ANALCG OUTPUT		1.861.751.00
			4	1	1	13C				ANALCG OUTPUT		1.861.751.00
			4	1	1	19A				ANALCG OUTPUT		1.861.751.00
			4	1	1	19B				ANALCG OUTPUT		1.861.751.00
			4	1	1	19C				ANALCG OUTPUT		1.861.751.00
			4	1	1	23A				ANALCG OUTPUT		1.861.751.00
			4	1	2	13A				ANALCG INPUT		1.861.752.00
			4	1	2	13B				ANALCG INPUT		1.861.752.00
			4	1	2	13C				ANALCG INPUT		1.861.752.00
			4	1	2	19A				ANALCG INPUT		1.861.752.00
			4	1	2	19B				ANALCG INPUT		1.861.752.00
			4	1	2	19C				ANALCG INPUT		1.861.752.00
			4	1	12	15A				RT/TC CDEG		1.861.861.00
			4	1	12	15B				RT/TC CDEG		1.861.861.00
			4	1	12	15C				RT/TC CDEG		1.861.861.00
			4	1	16	1				CONNECTOR 1 (ANALCG I/O)		1.861.775.00
			4	1	16	3				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	1	16	5				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	1	16	7				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	1	16	9				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	1	16	11				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	1	16	13				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	1	23	20A				POWER SUPPLY		1.861.515.00
			4	1	23	20B				POWER SUPPLY		1.861.515.00
			4	1	23	20C				POWER SUPPLY		1.861.515.00
			4	1	23	20D				POWER SUPPLY		1.861.515.00
			4	1	23	24A				POWER SUPPLY		1.861.515.00
			4	1	23	24B				POWER SUPPLY		1.861.515.00
			4	1	23	24C				POWER SUPPLY		1.861.515.00
ANAIIN-1			4	1	2	15C				ANALCG INPUT		1.861.752.00
			4	1	16	25				CONNECTOR 1 (ANALCG I/O)		1.861.775.00
			4	2	4	3				CHANNEL 1 INPUT (XLR)		1.861.775.00
			4	2	21	4				CHANNEL 1 I/O (CABLE) (CIS)		
ANAIIN-2			4	1	2	17C				ANALCG INPUT		1.861.752.00
			4	1	16	23				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	2	3				CHANNEL 2 INPUT (XLR)		1.861.775.00
			4	2	22	4				CHANNEL 2 I/O (CABLE) (CIS)		
ANAIN-1			4	1	2	15A				ANALCG INPUT		1.861.752.00
			4	1	16	24				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	4	2				CHANNEL 1 INPUT (XLR)		1.861.775.00
			4	2	21	3				CHANNEL 1 I/O (CABLE) (CIS)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 125 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
ANAIN-2			4	1	2	17A				ANALCG INPUT		1.861.752.00
			4	1	16	22				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	2	2				CHANNEL 2 INPUT (XLR)		1.861.775.00
			4	2	22	3				CHANNEL 2 I/O (CABLE) (CIS)		
ANAIOUT1			4	1	1	15C				ANALCG OUTPUT		1.861.751.00
			4	1	16	17				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	3	3				CHANNEL 1 OUTPUT (XLR)		1.861.775.00
			4	2	21	7				CHANNEL 1 I/O (CABLE) (CIS)		
ANAIOUT2			4	1	1	17C				ANALCG OUTPUT		1.861.751.00
			4	1	16	15				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	1	3				CHANNEL 2 OUTPUT (XLR)		1.861.775.00
			4	2	22	7				CHANNEL 2 I/O (CABLE) (CIS)		
ANAOUT-1			4	1	1	15A				ANALCG OUTPUT		1.861.751.00
			4	1	16	16				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	3	2				CHANNEL 1 OUTPUT (XLR)		1.861.775.00
			4	2	21	6				CHANNEL 1 I/O (CABLE) (CIS)		
ANAOUT-2			4	1	1	17A				ANALCG OUTPUT		1.861.751.00
			4	1	16	14				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	1	2				CHANNEL 2 OUTPUT (XLR)		1.861.775.00
			4	2	22	6				CHANNEL 2 I/O (CABLE) (CIS)		
ANM-SH1			11	48	1	26				FROM GRF50, ELM03		
			11	48	2	8				CONNECTOR EDIT ASSEMBLY		
			11	49	1	8				FROM GRP48, ELM02		
			11	50	3	26				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
ANM-SH2			11	48	1	25				FROM GRF50, ELM03		
			11	48	2	10				CONNECTOR EDIT ASSEMBLY		
			11	49	1	10				FROM GRP48, ELM02		
			11	50	3	25				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
ANM-SH3			11	48	1	24				FROM GRF50, ELM03		
			11	48	2	9				CONNECTOR EDIT ASSEMBLY		
			11	49	1	9				FROM GRP48, ELM02		
			11	50	3	24				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
AUX3GND1			8		76	3				AUX 3 INPUT PLUG (XLR FEMALE)		1.861.586.00
			8		76	4				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	1	5A				CUE/PQ DELAY (XLR)		1.861.886.00
			4		80	16				RACK-CUE I/O (25 PIN D-SUB)		
AUX3GND0			3		76	2				AUX 3 OUTPUT PLUG (XLR MALE)		1.861.586.00
			3		76	4				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	6	7A				ANALCG ROUTING		1.861.884.00
			4		80	16				RACK-CUE I/O (25 PIN D-SUB)		
AUX3IIN			6		76	3				AUX 3 INPUT PLUG (XLR FEMALE)		1.861.586.00
			6		76	4				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	1	4C				CUE/PQ DELAY (XLR)		1.861.886.00
			6		80	16				RACK-CUE I/O (25 PIN D-SUB)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 176 *
 * L.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
AUX3IN	9		1	76	3	2				AUX 3 INPUT PLUG (XLR FEMALE)		1.861.586.00
	9		1	76	4	8				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	1	4A				CUE/PG DELAY		1.861.816.00
	?		1	80	16	5				RACK-CUE I/O (25 PIN D-SUB)		
AUX3IGUT	6		1	76	2	3				AUX 3 OUTPUT PLUG (XLR MALE)		1.861.586.00
	6		1	76	4	7				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	6	6C				ANALCG ROUTING		1.861.814.00
	6		1	80	16	4				RACK-CUE I/O (25 PIN D-SUB)		
AUX3OUT	?		1	76	2	2				AUX 3 OUTPUT PLUG (XLR MALE)		1.861.586.00
	?		1	76	4	5				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	6	6A				ANALCG ROUTING		1.861.814.00
	?		1	80	16	3				RACK-CUE I/O (25 PIN D-SUB)		
AUX4GND0	8		1	76	1	1				AUX 4 OUTPUT PLUG (XLR MALE)		1.861.586.00
	8		1	76	4	2				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	6	7C				ANALCG ROUTING		1.861.814.00
	4		1	80	16	14				RACK-CUE I/O (25 PIN D-SUB)		
AUX4IGUT	6		1	76	1	3				AUX 4 OUTPUT PLUG (XLR MALE)		1.861.586.00
	6		1	76	4	3				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	6	8C				ANALCG ROUTING		1.861.814.00
	6		1	80	16	2				RACK-CUE I/O (25 PIN D-SUB)		
AUX4OUT	?		1	76	1	?				AUX 4 OUTPUT PLUG (XLR MALE)		1.861.586.00
	?		1	76	4	1				CUE I/O (CIS 10 FEMALE)		1.861.586.00
			1	80	6	8A				ANALCG ROUTING		1.861.814.00
	?		1	80	16	1				RACK-CUE I/O (25 PIN D-SUB)		
BLSYN			1	73	3	1				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	1				REARPANEL TC (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	20C				WRITE AMPLIFIER		1.861.803.00
			4	1	10	29C				TRANSFORMER		1.861.899.00
			4	1	18	1				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	1				BOX-RACK 3 CONNECTOR (CABLE)		
BLSYN			1	73	3	14				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	14				REARPANEL TC (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	20A				WRITE AMPLIFIER		1.861.803.00
			4	1	10	29A				TRANSFORMER		1.861.899.00
			4	1	18	14				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	14				BOX-RACK 3 CONNECTOR (CABLE)		
BM-0.2			11	48	1	6				FROM GRP50. ELM03		
			11	48	3	8				WIRE FIELD		
			11	50	3	6				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
BM-0.3			11	48	1	7				FROM GRP50. ELM03		
			11	48	3	7				WIRE FIELD		
			11	50	3	7				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
BM-0.4			11	48	1	8				FROM GRP50. ELM03		
			11	48	3	6				WIRE FIELD		
			11	50	3	8				CONNECTOR PUSHBUTTON ASSEMBLY	P02	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 177 *
 * L.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
BM-0.5			11	48	1	9				FROM GRP50. ELM03		
			11	48	3	5				WIRE FIELD		
			11	50	3	9				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
BM-0.6			11	48	1	10				FROM GRP50. ELM03		
			11	48	3	4				WIRE FIELD		
			11	50	3	10				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
BM-0.7			11	48	1	11				FROM GRP50. ELM03		
			11	48	3	3				WIRE FIELD		
			11	50	3	11				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
BMCAX			3	3	6	2				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	2				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BMCCH1			3	3	6	12				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	12				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BMCCH2			3	3	6	10				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	10				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BMCINP			3	3	6	16				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	16				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BMCMIK			3	3	6	6				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	6				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BMCCTAP			3	3	6	14				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	14				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BMCUE1			3	3	6	8				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	8				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BMCUE2			3	3	6	4				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	4				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
BR-FADRY			11	25	3	8			B	CONN. PARALLEL REMOTE CONTRL	J03	
			11	27	4	15				TO CONN. PARALLEL REMOTE CONTR.	P04	
BR-FORW			11	25	2	3			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	3			B	CONN. PARALLEL REMOTE CONTRL	J03	
			11	27	3	5				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	5				TO CONN. PARALLEL REMOTE CONTR.	P04	
BR-LOCST			11	25	3	7			B	CONN. PARALLEL REMOTE CONTRL	J03	
			11	27	4	13				TO CONN. PARALLEL REMOTE CONTR.	P04	
BR-PLAY			11	25	2	15			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	15			B	CONN. PARALLEL REMOTE CONTRL	J03	
			11	27	3	4				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	4				TO CONN. PARALLEL REMOTE CONTR.	P04	
BR-REC			11	25	2	9			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	9			B	CONN. PARALLEL REMOTE CONTRL	J03	
			11	27	3	17				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	17				TO CONN. PARALLEL REMOTE CONTR.	P04	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 128 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
BR-REW			11	25	2	2			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	2			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	3				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	3				TO CONN. PARALLEL REMOTE CONTR.	P04	
BR-STOP			11	25	2	16			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	16			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	6				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	6				TO CONN. PARALLEL REMOTE CONTR.	P04	
BR-VRSPD			11	25	2	4			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	4			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	7				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	7				TO CONN. PARALLEL REMOTE CONTR.	P04	
BSYNGOUT			4	1	4	23B				GAINS CONTROL		1.861.853.00
			4	1	5	23B				DAPRC INTERFACE		1.861.854.00
CBUSAD			1	73	2	20				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	7	3A				PDM CONTROL		1.861.813.00
			1	80	8	3A				DISPLAY INTERFACE		1.861.817.00
			1	80	12	15				RACK-CAGE (25 PIN D-SUB)		
			1	80	15	20				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			2	1	3	15				BACKPANEL RACK (D-SUB 25P)		1.861.895.00
			2	1	4	22A				DETECTOR		1.861.804.00
			4	1	1	23A				ANALCG OUTPUT		1.861.751.00
			4	1	2	23A				ANALCG INPUT		1.861.752.00
			4	1	3	18C				SPARE 1		
			4	1	4	18C				GAINS CONTROL		1.861.853.00
			4	1	8	18C				CODEC CONTROL		1.861.857.00
			4	1	12	18C				RT/TC CDEEC		1.861.861.00
			4	1	13	18C				TIMING + TEST		1.861.862.00
			4	1	14	18C				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	18C				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	20				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	20				BOX-RACK 2 CONNECTOR (CABLE)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 129 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.	
CBUSDAT			1	73	2	21				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00	
			1	80	7	4A				PDM CONTROL		1.861.813.00	
			1	80	8	4A				DISPLAY INTERFACE		1.861.817.00	
			1	80	12	14				RACK-CAGE (25 PIN D-SUB)			
			1	80	15	21				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00	
			2	1	3	14				BACKPANEL RACK (D-SUB 25P)		1.861.895.00	
			2	1	4	23A				DETECTOR		1.861.804.00	
			4	1	1	24A				ANALCG OUTPUT		1.861.751.00	
			4	1	2	24A				ANALCG INPUT		1.861.752.00	
			4	1	3	19B				SPARE 1			
			4	1	4	19B				GAINS CONTROL		1.861.853.00	
			4	1	8	19B				CODEC CONTROL		1.861.857.00	
			4	1	12	19B				RT/TC CDEEC		1.861.861.00	
			4	1	13	19B				TIMING + TEST		1.861.862.00	
			4	1	14	19B				SYSTEM CONTROLLER 1		1.861.763.00	
			4	1	15	19B				SYSTEM CONTROLLER 2		1.861.763.00	
			4	1	22	21				CONNECTOR 7 (BACKPANEL RACK 2)			
			4	1	51	21				BOX-RACK 2 CONNECTOR (CABLE)			
	CBUSIAD			1	73	2	7				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
				1	80	7	3C				PDM CONTROL		1.861.813.00
			1	80	8	3C				DISPLAY INTERFACE		1.861.817.00	
			1	80	12	2				RACK-CAGE (25 PIN D-SUB)			
			1	80	15	6				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00	
			2	1	3	2				BACKPANEL RACK (D-SUB 25P)		1.861.895.00	
			2	1	4	22C				DETECTOR		1.861.804.00	
			4	1	1	23B				ANALCG OUTPUT		1.861.751.00	
			4	1	2	23B				ANALCG INPUT		1.861.752.00	
			4	1	3	19A				SPARE 1			
			4	1	4	19A				GAINS CONTROL		1.861.853.00	
			4	1	8	19A				CODEC CONTROL		1.861.857.00	
			4	1	12	19A				RT/TC CDEEC		1.861.861.00	
			4	1	13	19A				TIMING + TEST		1.861.862.00	
			4	1	14	19A				SYSTEM CONTROLLER 1		1.861.763.00	
			4	1	15	19A				SYSTEM CONTROLLER 2		1.861.763.00	
			4	1	22	7				CONNECTOR 7 (BACKPANEL RACK 2)			
			4	1	51	7				BOX-RACK 2 CONNECTOR (CABLE)			
CBUSCLK				1	73	2	6				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
				1	80	7	2C				PDM CONTROL		1.861.813.00
			1	80	8	2C				DISPLAY INTERFACE		1.861.817.00	
			1	80	12	3				RACK-CAGE (25 PIN D-SUB)			
			1	80	15	6				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00	
			2	1	3	3				BACKPANEL RACK (D-SUB 25P)		1.861.895.00	
			2	1	4	21C				DETECTOR		1.861.804.00	
			4	1	1	22B				ANALCG OUTPUT		1.861.751.00	
			4	1	2	22B				ANALCG INPUT		1.861.752.00	
			4	1	3	18B				SPARE 1			
			4	1	4	18B				GAINS CONTROL		1.861.853.00	
			4	1	8	18B				CODEC CONTROL		1.861.857.00	
			4	1	12	18B				RT/TC CDEEC		1.861.861.00	
			4	1	13	18B				TIMING + TEST		1.861.862.00	
			4	1	14	18B				SYSTEM CONTROLLER 1		1.861.763.00	
			4	1	15	18B				SYSTEM CONTROLLER 2		1.861.763.00	
			4	1	22	6				CONNECTOR 7 (BACKPANEL RACK 2)			
			4	1	51	6				BOX-RACK 2 CONNECTOR (CABLE)			

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 130 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLFMNT NR.
CBUSIDAT			1	73	2	8				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.813.00
			1	8C	7	4C				PDM CONTROL		1.861.813.00
			1	8C	8	4C				DISPLAY INTERFACE		1.861.817.00
			1	8C	12	1				RACK-CAGE (25 PIN D-SUB)		1.861.583.00
			1	8C	15	8				BOX-RACK 2 TO REAR PANEL TO		1.861.895.00
			2	1	3	1				BACKPANEL RACK (D-SUB 25P)		1.861.804.00
			2	1	4	23C				DETECTOR		1.861.751.00
			4	1	1	24B				ANALCG CUTPUT		1.861.752.00
			4	1	2	24B				ANALCG INPUT		1.861.853.00
			4	1	3	19C				SPARE 1		1.861.857.00
			4	1	4	19C				GAIAS CONTROL		1.861.861.00
			4	1	8	19C				CODEC CONTROL		1.861.862.00
			4	1	12	19C				RT/TC CODEC		1.861.763.00
			4	1	13	19C				TIMING + TEST		1.861.763.00
			4	1	14	19C				SYSTEM CONTROLLER 1		1.861.857.00
		4	1	15	19C				SYSTEM CONTROLLER 2		1.861.858.00	
		4	1	22	8				CONNECTOR 7 (BACKPANEL RACK 2)			
		4	1	51	8				BOX-RACK 2 CONNECTOR (CABLE)			
CCADDRDE			4	1	8	20B				CODEC CONTROL		1.861.857.00
			4	1	9	20B				CODEC MEMORY		1.861.858.00
CCADEC			4	1	8	11B				CODEC CONTROL		1.861.857.00
			4	1	9	11B				CODEC MEMORY		1.861.858.00
CCAHI			4	1	8	9A				CODEC CONTROL		1.861.857.00
			4	1	9	9A				CODEC MEMORY		1.861.858.00
CCAH2			4	1	8	9B				CODEC CONTROL		1.861.857.00
			4	1	9	9B				CODEC MEMORY		1.861.858.00
CCAH3			4	1	8	9C				CODEC CONTROL		1.861.857.00
			4	1	9	9C				CODEC MEMORY		1.861.858.00
CCAH4			4	1	8	10A				CODEC CONTROL		1.861.857.00
			4	1	9	10A				CODEC MEMORY		1.861.858.00
CCAH5			4	1	8	10B				CODEC CONTROL		1.861.857.00
			4	1	9	10B				CODEC MEMORY		1.861.858.00
CCAH6			4	1	8	10C				CODEC CONTROL		1.861.857.00
			4	1	9	10C				CODEC MEMORY		1.861.858.00
CCAH7			4	1	8	11A				CODEC CONTROL		1.861.857.00
			4	1	9	11A				CODEC MEMORY		1.861.858.00
CCALO			4	1	8	4A				CODEC CONTROL		1.861.857.00
			4	1	9	4A				CODEC MEMORY		1.861.858.00
CCAL1			4	1	8	4B				CODEC CONTROL		1.861.857.00
			4	1	9	4B				CODEC MEMORY		1.861.858.00
CCAL2			4	1	8	4C				CODEC CONTROL		1.861.857.00
			4	1	9	4C				CODEC MEMORY		1.861.858.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 131 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLFMNT NR.
CCAL3			4	1	8	7A				CODEC CONTROL		1.861.857.00
			4	1	9	7A				CODEC MEMORY		1.861.858.00
CCAL4			4	1	8	7B				CODEC CONTROL		1.861.857.00
			4	1	9	7B				CODEC MEMORY		1.861.858.00
CCAL5			4	1	8	7C				CODEC CONTROL		1.861.857.00
			4	1	9	7C				CODEC MEMORY		1.861.858.00
CCAL6			4	1	8	8A				CODEC CONTROL		1.861.857.00
			4	1	9	8A				CODEC MEMORY		1.861.858.00
CCAL7			4	1	8	8B				CODEC CONTROL		1.861.857.00
			4	1	9	8B				CODEC MEMORY		1.861.858.00
CCBLCRC			4	1	8	29C				CODEC CONTROL		1.861.857.00
			4	1	9	29C				CODEC MEMORY		1.861.858.00
CCCRC			4	1	8	16C				CODEC CONTROL		1.861.857.00
			4	1	9	16C				CODEC MEMORY		1.861.858.00
CCECD			4	1	8	15B				CODEC CONTROL		1.861.857.00
			4	1	9	15B				CODEC MEMORY		1.861.858.00
CCEE0			4	1	8	29A				CODEC CONTROL		1.861.857.00
			4	1	9	29A				CODEC MEMORY		1.861.858.00
CCEE1			4	1	8	29B				CODEC CONTROL		1.861.857.00
			4	1	9	29B				CODEC MEMORY		1.861.858.00
CCENCIN			4	1	8	20C				CODEC CONTROL		1.861.857.00
			4	1	9	20C				CODEC MEMORY		1.861.858.00
CCE0			4	1	8	15A				CODEC CONTROL		1.861.857.00
			4	1	9	15A				CODEC MEMORY		1.861.858.00
CCE1			4	1	8	14C				CODEC CONTROL		1.861.857.00
			4	1	9	14C				CODEC MEMORY		1.861.858.00
CCFBCLR			4	1	8	21A				CODEC CONTROL		1.861.857.00
			4	1	9	21A				CODEC MEMORY		1.861.858.00
CCIDIS			4	1	8	23A				CODEC CONTROL		1.861.857.00
			4	1	9	23B				CODEC MEMORY		1.861.858.00
CCIGMASK			4	1	8	24A				CODEC CONTROL		1.861.857.00
			4	1	9	17B				CODEC MEMORY		1.861.858.00
CCILV			4	1	8	15C				CODEC CONTROL		1.861.857.00
			4	1	9	15C				CODEC MEMORY		1.861.858.00
CCIPRSP			4	1	8	24B				CODEC CONTROL		1.861.857.00
			4	1	9	24C				CODEC MEMORY		1.861.858.00
CCIR5			4	1	8	8C				CODEC CONTROL		1.861.857.00
			4	1	9	8C				CODEC MEMORY		1.861.858.00

 * WILLI STUDER AG * S I G N A L * W I R E * L I S T * 86/12/08 * 10:54 * P A G E 132 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLFMNT NR.
CCK5			4	1	8	22A				CODEC CONTROL		1.861.857.00
			4	1	9	22A				CODEC MEMORY		1.861.858.00
CCPR-1			4	1	8	11C				CODEC CONTROL		1.861.857.00
			4	1	9	11C				CODEC MEMORY		1.861.858.00
CCQEC0			4	1	8	16A				CODEC CONTROL		1.861.857.00
			4	1	9	16A				CODEC MEMORY		1.861.858.00
CCQEC0M			4	1	8	16B				CODEC CONTROL		1.861.857.00
			4	1	9	16B				CODEC MEMORY		1.861.858.00
CCRDERR			4	1	8	26B				CODEC CONTROL		1.861.857.00
			4	1	9	26B				CODEC MEMORY		1.861.858.00
CCREPRO			4	1	8	20A				CODEC CONTROL		1.861.857.00
			4	1	9	20A				CODEC MEMORY		1.861.858.00
CCWDERR			4	1	8	21C				CODEC CONTROL		1.861.857.00
			4	1	9	21C				CODEC MEMORY		1.861.858.00
CCWRERR			4	1	8	26C				CODEC CONTROL		1.861.857.00
			4	1	9	26C				CODEC MEMORY		1.861.858.00
CC0			4	1	8	12A				CODEC CONTROL		1.861.857.00
			4	1	9	12A				CODEC MEMORY		1.861.858.00
CC1			4	1	8	12B				CODEC CONTROL		1.861.857.00
			4	1	9	12B				CODEC MEMORY		1.861.858.00
CC2			4	1	8	12C				CODEC CONTROL		1.861.857.00
			4	1	9	12C				CODEC MEMORY		1.861.858.00
CC3			4	1	8	13A				CODEC CONTROL		1.861.857.00
			4	1	9	13A				CODEC MEMORY		1.861.858.00
CC4			4	1	8	13B				CODEC CONTROL		1.861.857.00
			4	1	9	13B				CODEC MEMORY		1.861.858.00
CC5			4	1	8	13C				CODEC CONTROL		1.861.857.00
			4	1	9	13C				CODEC MEMORY		1.861.858.00
CC6			4	1	8	14A				CODEC CONTROL		1.861.857.00
			4	1	9	14A				CODEC MEMORY		1.861.858.00
CC7			4	1	8	14B				CODEC CONTROL		1.861.857.00
			4	1	9	14B				CODEC MEMORY		1.861.858.00
CHAESB			4	1	4	7B				GAINS CONTROL		1.861.853.00
			4	1	5	8B				DAPRC INTERFACE		1.861.854.00
CHASEL1			1	80	6	29A				ANALCG ROUTING		1.861.814.00
			1	80	7	29C				PDM CONTROL		1.861.813.00
CHASEL2			1	80	6	29C				ANALCG ROUTING		1.861.814.00
			1	80	7	29A				PDM CONTROL		1.861.813.00

 * WILLI STUDER AG * S I G N A L * W I R E * L I S T * 86/12/08 * 10:54 * P A G E 133 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
CLK1			4	1	10	25A				TRANSFORMATTER		1.861.859.00
			4	1	11	24A				RUN PROCESSOR		1.861.860.00
			4	1	13	24A				TIMING + TEST		1.861.862.00
CLK4			4	1	4	25A				GAINS CONTROL		1.861.853.00
			4	1	5	25A				DAPRC INTERFACE		1.861.854.00
			4	1	6	25A				DATA PROCESSOR		1.861.855.00
			4	1	7	25A				COEFFICIENT GENERATOR		1.861.856.00
			4	1	10	25B				TRANSFORMATTER		1.861.859.00
			4	1	13	24B				TIMING + TEST		1.861.862.00
CLK5			4	1	5	25B				DAPRC INTERFACE		1.861.854.00
			4	1	7	25B				COEFFICIENT GENERATOR		1.861.856.00
			4	1	8	21B				CODEC CONTROL		1.861.857.00
			4	1	10	25C				TRANSFORMATTER		1.861.859.00
			4	1	12	12B				RT/TC CODEC		1.861.861.00
			4	1	13	24C				TIMING + TEST		1.861.862.00
CLK6			4	1	8	25A				CODEC CONTROL		1.861.857.00
			4	1	9	25A				CODEC MEMORY		1.861.858.00
			4	1	10	26A				TRANSFORMATTER		1.861.859.00
			4	1	11	25A				RUN PROCESSOR		1.861.860.00
			4	1	13	25A				TIMING + TEST		1.861.862.00
CLK7			4	1	8	25B				CODEC CONTROL		1.861.857.00
			4	1	9	25B				CODEC MEMORY		1.861.858.00
			4	1	13	25B				TIMING + TEST		1.861.862.00
CLK8			4	1	8	25C				CODEC CONTROL		1.861.857.00
			4	1	9	25C				CODEC MEMORY		1.861.858.00
			4	1	13	25C				TIMING + TEST		1.861.862.00
CLK9			4	1	8	26A				CODEC CONTROL		1.861.857.00
			4	1	9	26A				CODEC MEMORY		1.861.858.00
			4	1	13	26A				TIMING + TEST		1.861.862.00
CODE			3	3	2	1				AUDIO SPEAKER RIGHT (CIS 3P) J3		1.861.746.00
			3	3	3	2				AUDIO SPEAKER LEFT (CIS 5P) J4		1.861.746.00
			3	3	4	1				AUDIO PHONES PLUG (CIS 6P) J2		1.861.746.00
			3	3	4	3				AUDIO PHONES PLUG (CIS 6P) J2		1.861.746.00
		3	3	5	4				TO TANDEM POT (CIS 6P) J1		1.912.001.30	
CPHASE-R	2		11	38	1	1			F	FROM GRP39. ELM02	J01	
	2		11	38	4	1			L	STATOR (WIRE FIELD)		
			11	39	2	1			M	TO GRP38. ELM01	P02	
CPHASE-S	J		11	38	1	3			F	FROM GRP39. ELM02	J01	
	0		11	38	4	2			L	STATOR (WIRE FIELD)		
			11	39	2	3			M	TO GRP38. ELM01	P02	
CPHASE-T	9		11	38	1	2			F	FROM GRP39. ELM02	J01	
	9		11	38	4	3			L	STATOR (WIRE FIELD)		
			11	39	2	2			M	TO GRP38. ELM01	P02	
CC			2	1	4	29B				DETECTOR		1.861.804.00
			2	1	7	29B				PLAYBACK AMPLIFIER		1.861.801.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 134 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEFMT NR.
C1			2	1	4	28B				DETECTOR		1.861.804.00
			2	1	7	28B				PLAYBACK AMPLIFIER		1.861.801.00
C2			2	1	4	27B				DETECTOR		1.861.804.00
			2	1	7	27B				PLAYBACK AMPLIFIER		1.861.801.00
C3			2	1	4	26B				DETECTOR		1.861.804.00
			2	1	7	26B				PLAYBACK AMPLIFIER		1.861.801.00
D-WRITE			3	1	2	19				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	19				DATA DP PROC (FLATCAB. SOLC. 26P.)		1.861.741.00
CABCDAL			4	1	1	7A				ANALCG CUTPUT		1.861.751.00
			4	1	5	11C				DAPRO INTERFACE		1.861.854.00
DACOUT1			1	73	1	1				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	6	2A				ANALCG ROUTING		1.861.814.00
			1	8C	14	1				BOX-RACK 1 TO REAR PANEL TD		
			4	1	1	14B				ANALCG CUTPUT		1.861.751.00
			4	1	17	1				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	5C	1				BOX-RACK 1 CONNECTOR (CABLE)		
DACOUT2			1	73	1	2				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	6	3A				ANALCG ROUTING		1.861.814.00
			1	8C	14	2				BOX-RACK 1 TO REAR PANEL TD		
			4	1	1	18B				ANALCG CUTPUT		1.861.751.00
			4	1	17	2				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	5D	2				BOX-RACK 1 CONNECTOR (CABLE)		
DADAT11			4	1	1	30A				ANALCG CUTPUT		1.861.751.00
			4	1	5	12B				DAPRO INTERFACE		1.861.854.00
DADAT21			4	1	1	29A				ANALCG CUTPUT		1.861.751.00
			4	1	5	13A				DAPRO INTERFACE		1.861.854.00
DAIBCDAL			4	1	1	7B				ANALCG CUTPUT		1.861.751.00
			4	1	5	12A				DAPRO INTERFACE		1.861.854.00
DAICAT11			4	1	1	30B				ANALCG CUTPUT		1.861.751.00
			4	1	5	12C				DAPRO INTERFACE		1.861.854.00
DAIDAT21			4	1	1	29B				ANALCG CUTPUT		1.861.751.00
			4	1	5	13B				DAPRO INTERFACE		1.861.854.00
DAIVAL1A			4	1	1	31B				ANALCG CUTPUT		1.861.751.00
			4	1	5	11B				DAPRO INTERFACE		1.861.854.00
DAI96FS			4	1	1	10B				ANALCG CUTPUT		1.861.751.00
			4	1	5	10B				DAPRO INTERFACE		1.861.854.00
DAVAL1A			4	1	1	31A				ANALCG CUTPUT		1.861.751.00
			4	1	5	11A				DAPRO INTERFACE		1.861.854.00
DA96FS			4	1	1	10A				ANALCG CUTPUT		1.861.751.00
			4	1	5	10A				DAPRO INTERFACE		1.861.854.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 135 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEFMT NR.
DCDAPDEC			4	1	7	22C				COEFFICIENT GENERATOR		1.861.856.00
			4	1	9	22C				CODEC MEMORY		1.861.858.00
DCD1CLK			4	1	7	19A				COEFFICIENT GENERATOR		1.861.856.00
			4	1	8	17A				CODEC CONTROL		1.861.857.00
DCD2CLK			4	1	7	19B				COEFFICIENT GENERATOR		1.861.856.00
			4	1	8	17B				CODEC CONTROL		1.861.857.00
DCENGDAF			4	1	5	22B				DAPRO INTERFACE		1.861.854.00
			4	1	9	22B				CODEC MEMORY		1.861.858.00
DCFMUT			4	1	6	23B				DATA PROCESSOR		1.861.855.00
			4	1	8	23B				CODEC CONTROL		1.861.857.00
DCFSPL			4	1	6	23C				DATA PROCESSOR		1.861.855.00
			4	1	8	23C				CODEC CONTROL		1.861.857.00
DCIDAVAL			4	1	5	19C				DAPRO INTERFACE		1.861.854.00
			4	1	9	17C				CODEC MEMORY		1.861.858.00
DCINIT			4	1	4	29C				GAINS CONTROL		1.861.853.00
			4	1	6	29A				DATA PROCESSOR		1.861.855.00
			4	1	8	17C				CODEC CONTROL		1.861.857.00
DCINVAL			4	1	6	23A				DATA PROCESSOR		1.861.855.00
			4	1	9	23A				CODEC MEMORY		1.861.858.00
DDATAAES			4	1	4	15A				GAINS CONTROL		1.861.853.00
			4	1	5	9A				DAPRO INTERFACE		1.861.854.00
DCBCLK			4	1	4	7A				GAINS CONTROL		1.861.853.00
			4	1	5	8A				DAPRO INTERFACE		1.861.854.00
DCBSYNIN			4	1	4	7C				GAINS CONTROL		1.861.853.00
			4	1	5	8C				DAPRO INTERFACE		1.861.854.00
DDB1D14			4	1	6	14C				DATA PROCESSOR		1.861.855.00
			4	1	7	14C				COEFFICIENT GENERATOR		1.861.856.00
DCB2D13			4	1	6	15A				DATA PROCESSOR		1.861.855.00
			4	1	7	15A				COEFFICIENT GENERATOR		1.861.856.00
DCB2D14			4	1	6	15B				DATA PROCESSOR		1.861.855.00
			4	1	7	15B				COEFFICIENT GENERATOR		1.861.856.00
DCB2D15			4	1	6	15C				DATA PROCESSOR		1.861.855.00
			4	1	7	15C				COEFFICIENT GENERATOR		1.861.856.00
DCCHPRO			4	1	4	14A				GAINS CONTROL		1.861.853.00
			4	1	5	4C				DAPRO INTERFACE		1.861.854.00
			4	1	5	14A				DAPRO INTERFACE		1.861.854.00
			4	1	6	14A				DATA PROCESSOR		1.861.855.00
			4	1	7	14A				COEFFICIENT GENERATOR		1.861.856.00
			4	1	13	4C				TIMING + TEST		1.861.862.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 136 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
DDCHSTAT			4	1	4	15C				GAINS CONTROL		1.861.853.00
			4	1	5	9C				DAPRC INTERFACE		1.861.854.00
DDCK2AES			4	1	4	15B				GAINS CONTROL		1.861.853.00
			4	1	5	9B				DAPRC INTERFACE		1.861.854.00
DDCLKG1			4	1	4	8C				GAINS CONTROL		1.861.853.00
			4	1	7	8C				COEFFICIENT GENERATOR		1.861.856.00
DDCLRO			4	1	6	16B				DATA PROCESSOR		1.861.855.00
			4	1	7	16B				COEFFICIENT GENERATOR		1.861.856.00
DDC3			4	1	4	16C				GAINS CONTROL		1.861.853.00
			4	1	6	16C				DATA PROCESSOR		1.861.855.00
DDDATAG1			4	1	4	8B				GAINS CONTROL		1.861.853.00
			4	1	7	8B				COEFFICIENT GENERATOR		1.861.856.00
DDFA00			4	1	4	4B				GAINS CONTROL		1.861.853.00
			4	1	5	7B				DAPRC INTERFACE		1.861.854.00
DDFAUD1			4	1	4	4A				GAINS CONTROL		1.861.853.00
			4	1	5	7A				DAPRC INTERFACE		1.861.854.00
DDFGAI			4	1	6	14B				DATA PROCESSOR		1.861.855.00
			4	1	7	14B				COEFFICIENT GENERATOR		1.861.856.00
DDGRDY1			4	1	4	10A				GAINS CONTROL		1.861.853.00
			4	1	7	10A				COEFFICIENT GENERATOR		1.861.856.00
DDHPOFF			4	1	4	17C				GAINS CONTROL		1.861.853.00
			4	1	6	17C				DATA PROCESSOR		1.861.855.00
DDIDIGNU			4	1	1	12B				ANALOG OUTPUT		1.861.751.00
			4	1	4	20A				GAINS CONTROL		1.861.853.00
DDIFVAL			4	1	4	4C				GAINS CONTROL		1.861.853.00
			4	1	5	7C				DAPRC INTERFACE		1.861.854.00
DDISTART			4	1	5	10C				DAPRC INTERFACE		1.861.854.00
			4	1	6	10C				DATA PROCESSOR		1.861.855.00
DDLCLK1			4	1	4	9A				GAINS CONTROL		1.861.853.00
			4	1	7	9A				COEFFICIENT GENERATOR		1.861.856.00
DDLCLK10			4	1	4	17A				GAINS CONTROL		1.861.853.00
			4	1	5	18A				DAPRC INTERFACE		1.861.854.00
			4	1	6	18A				DATA PROCESSOR		1.861.855.00
DDLCLK11			4	1	4	17B				GAINS CONTROL		1.861.853.00
			4	1	5	18B				DAPRC INTERFACE		1.861.854.00
			4	1	6	18B				DATA PROCESSOR		1.861.855.00
DDMIEN1			4	1	6	16A				DATA PROCESSOR		1.861.855.00
			4	1	7	16A				COEFFICIENT GENERATOR		1.861.856.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 137 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
DDMUTE			4	1	4	21A				GAINS CONTROL		1.861.853.00
			4	1	6	21A				DATA PROCESSOR		1.861.855.00
DDPROA0			4	1	4	11A				GAINS CONTROL		1.861.853.00
			4	1	6	11A				DATA PROCESSOR		1.861.855.00
			4	1	7	11A				COEFFICIENT GENERATOR		1.861.856.00
DDPROA1			4	1	4	11B				GAINS CONTROL		1.861.853.00
			4	1	6	11B				DATA PROCESSOR		1.861.855.00
			4	1	7	11B				COEFFICIENT GENERATOR		1.861.856.00
DDPROA2			4	1	4	11C				GAINS CONTROL		1.861.853.00
			4	1	6	11C				DATA PROCESSOR		1.861.855.00
			4	1	7	11C				COEFFICIENT GENERATOR		1.861.856.00
DDPROA3			4	1	4	12A				GAINS CONTROL		1.861.853.00
			4	1	6	12A				DATA PROCESSOR		1.861.855.00
			4	1	7	12A				COEFFICIENT GENERATOR		1.861.856.00
DDPROA4			4	1	4	12B				GAINS CONTROL		1.861.853.00
			4	1	6	12B				DATA PROCESSOR		1.861.855.00
			4	1	7	12B				COEFFICIENT GENERATOR		1.861.856.00
DDPROA5			4	1	4	12C				GAINS CONTROL		1.861.853.00
			4	1	6	12C				DATA PROCESSOR		1.861.855.00
			4	1	7	12C				COEFFICIENT GENERATOR		1.861.856.00
DDPROA6			4	1	4	13A				GAINS CONTROL		1.861.853.00
			4	1	6	13A				DATA PROCESSOR		1.861.855.00
			4	1	7	13A				COEFFICIENT GENERATOR		1.861.856.00
DDPROA7			4	1	4	13B				GAINS CONTROL		1.861.853.00
			4	1	6	13B				DATA PROCESSOR		1.861.855.00
			4	1	7	13B				COEFFICIENT GENERATOR		1.861.856.00
DDPROA8			4	1	4	13C				GAINS CONTROL		1.861.853.00
			4	1	6	13C				DATA PROCESSOR		1.861.855.00
			4	1	7	13C				COEFFICIENT GENERATOR		1.861.856.00
DDPROA9			4	1	4	10B				GAINS CONTROL		1.861.853.00
			4	1	6	10B				DATA PROCESSOR		1.861.855.00
			4	1	7	10B				COEFFICIENT GENERATOR		1.861.856.00
DD3HEAD			4	1	6	9C				DATA PROCESSOR		1.861.855.00
			4	1	7	9C				COEFFICIENT GENERATOR		1.861.856.00
DINT			4	1	10	20A				TRANSFORMER		1.861.855.00
			4	1	11	20A				RUN PROCESSOR		1.861.860.00
DITHER			4	1	2	9A				ANALOG INPUT		1.861.752.00
DPC3AD			1	74	1	2				RACK-CCP/DP	(25-PIN D-SUB)	1.861.000.00
			1	8C	8	21C				DISPLAY INTERFACE		1.861.817.00
			1	8C	18	2				DISPLAY PANEL/CCP	(25 PIN D-SUB)	
			1	8C	19	2				RACK-MONITOR PANEL	(C-SUB CRIMP)	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 139 *
 * L.861.022.JJ D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFNT NR.
<<-- CONT. OF			3	1	1	2				BUS CCP TRANSCEIVER (D-SUB 25P F)	0	1.861.742.00
DPCUAD			3	2	1	2				BUS REARPANEL TD (C-SUB 25P M)		1.861.744.00
			3	2	2	2				BUS DP PROCESSOR (C-SUB 25P F)		1.861.744.00
			3	3	1	2				BUS REARPANEL RACK (C-SUB 25P M)		1.861.744.00
DPCBCLK			1	80	1	1				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
			1	80	8	22C				DISPLAY INTERFACE		1.861.817.00
			1	80	18	1				DISPLAY PANEL/CCP (25 PIN D-SUB)		
	2		1	80	19	1				RACK-MONITOR PANEL (D-SUB CRIMP)		
			3	1	1	1				BUS CCP TRANSCEIVER (C-SUB 25P F)	0	1.861.742.00
			3	2	1	1				BUS REARPANEL TD (C-SUB 25P M)		1.861.744.00
			3	2	2	1				BUS DP PROCESSOR (C-SUB 25P F)		1.861.744.00
			3	3	1	1				BUS REARPANEL RACK (C-SUB 25P M)		1.861.744.00
DPCODAT			1	80	1	3				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
			1	80	8	20C				DISPLAY INTERFACE		1.861.817.00
			1	80	18	3				DISPLAY PANEL/CCP (25 PIN D-SUB)		
	3		1	80	19	3				RACK-MONITOR PANEL (D-SUB CRIMP)		
			3	1	1	3				BUS CCP TRANSCEIVER (C-SUB 25P F)	C	1.861.742.00
			3	2	1	3				BUS REARPANEL TD (C-SUB 25P M)		1.861.744.00
			3	2	2	3				BUS DP PROCESSOR (C-SUB 25P F)		1.861.744.00
			3	3	1	3				BUS REARPANEL RACK (C-SUB 25P M)		1.861.744.00
DPCBIAD			1	80	1	15				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
			1	80	8	21A				DISPLAY INTERFACE		1.861.817.00
			1	80	18	15				DISPLAY PANEL/CCP (25 PIN D-SUB)		
	3		1	80	19	15				RACK-MONITOR PANEL (D-SUB CRIMP)		
			3	1	1	15				BUS CCP TRANSCEIVER (C-SUB 25P F)	0	1.861.742.00
			3	2	1	15				BUS REARPANEL TD (C-SUB 25P M)		1.861.744.00
			3	2	2	15				BUS DP PROCESSOR (C-SUB 25P F)		1.861.744.00
			3	3	1	15				BUS REARPANEL RACK (C-SUB 25P M)		1.861.744.00
DPCBICK			1	80	1	14				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
			1	80	8	22A				DISPLAY INTERFACE		1.861.817.00
			1	80	18	14				DISPLAY PANEL/CCP (25 PIN D-SUB)		
	4		1	80	19	14				RACK-MONITOR PANEL (D-SUB CRIMP)		
			3	1	1	14				BUS CCP TRANSCEIVER (C-SUB 25P F)	0	1.861.742.00
			3	2	1	14				BUS REARPANEL TD (C-SUB 25P M)		1.861.744.00
			3	2	2	14				BUS DP PROCESSOR (C-SUB 25P F)		1.861.744.00
			3	3	1	14				BUS REARPANEL RACK (C-SUB 25P M)		1.861.744.00
DPCBIDAT			1	80	1	16				RACK-CCP/DP (25-PIN D-SUB)		1.861.000.00
			1	80	8	2CA				DISPLAY INTERFACE		1.861.817.00
			1	80	18	16				DISPLAY PANEL/CCP (25 PIN D-SUB)		
	5		1	80	19	16				RACK-MONITOR PANEL (D-SUB CRIMP)		
			3	1	1	16				BUS CCP TRANSCEIVER (C-SUB 25P F)	C	1.861.742.00
			3	2	1	16				BUS REARPANEL TD (D-SUB 25P M)		1.861.744.00
			3	2	2	16				BUS DP PROCESSOR (C-SUB 25P F)		1.861.744.00
			3	3	1	16				BUS REARPANEL RACK (C-SUB 25P M)		1.861.744.00
DPD0			3	1	2	1				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	1				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DPD1			3	1	2	3				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	3				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 139 *
 * L.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFNT NR.
DPD2			3	1	2	5				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	5				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
BPD3			3	1	2	7				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	7				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DPD4			3	1	2	9				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	9				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DPD5			3	1	2	11				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	11				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DPD6			3	1	2	13				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	13				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DPD7			3	1	2	15				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	15				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DPKEYS			3	1	2	17				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	17				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DPNODE			3	1	2	21				DATA DP KEYBOARD (FLATCABLE 26P)		1.861.742.00
			3	9	1	21				DATA DP PROC (FLATCAB. SOLD. 26P.)		1.861.741.00
DP0			1	80	1	20C				CUE/PC DELAY		1.861.816.00
			1	80	2	20A				PDM MODULATOR		1.861.811.00
DP1			1	80	1	20A				CUE/PC DELAY		1.861.816.00
			1	80	2	20C				PDM MODULATOR		1.861.811.00
DP10			1	80	1	25C				CUE/PC DELAY		1.861.816.00
			1	80	2	25A				PDM MODULATOR		1.861.811.00
DP11			1	80	1	25A				CUE/PC DELAY		1.861.816.00
			1	80	2	25C				PDM MODULATOR		1.861.811.00
DP12			1	80	1	26C				CUE/PC DELAY		1.861.816.00
			1	80	2	26A				PDM MODULATOR		1.861.811.00
DP13			1	80	1	26A				CUE/PC DELAY		1.861.816.00
			1	80	2	26C				PDM MODULATOR		1.861.811.00
DP14			1	80	1	27C				CUE/PC DELAY		1.861.816.00
			1	80	2	27A				PDM MODULATOR		1.861.811.00
DP15			1	80	1	27A				CUE/PC DELAY		1.861.816.00
			1	80	2	27C				PDM MODULATOR		1.861.811.00
DP2			1	80	1	21C				CUE/PC DELAY		1.861.816.00
			1	80	2	21A				PDM MODULATOR		1.861.811.00
DP3			1	80	1	21A				CUE/PC DELAY		1.861.816.00
			1	80	2	21C				PDM MODULATOR		1.861.811.00
DP4			1	80	1	22C				CUE/PC DELAY		1.861.816.00
			1	80	2	22A				PDM MODULATOR		1.861.811.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 140 *
 * 1.861.022.00 D820X PCM RECCDR * 86/08/27 - CO *****

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	RFMARK	ELEMNT NR.
DP5			1	80	1	22A				CUE/PC DELAY		1.861.816.00
			1	80	2	22C				PDM MODULATOR		1.861.811.00
DP6			1	80	1	23C				CUE/PC DELAY		1.861.816.00
			1	80	2	23A				PDM MODULATOR		1.861.811.00
DP7			1	80	1	23A				CUE/PC DELAY		1.861.816.00
			1	80	2	23C				PDM MODULATOR		1.861.811.00
DP8			1	80	1	24C				CUE/PC DELAY		1.861.816.00
			1	80	2	24A				PDM MODULATOR		1.861.811.00
DP9			1	80	1	24A				CUE/PC DELAY		1.861.816.00
			1	80	2	24C				PDM MODULATOR		1.861.811.00
DSPA-0			1	70	1	15				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	6A				PDM CONTROL		1.861.813.00
			1	80	17	8				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPA-1			1	70	1	16				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	6C				PDM CONTROL		1.861.813.00
			1	80	17	21				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPA-2			1	70	1	17				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	7A				PDM CONTROL		1.861.813.00
			1	80	17	9				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPA-3			1	70	1	18				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	7C				PDM CONTROL		1.861.813.00
			1	80	17	22				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPA-4			1	70	1	19				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	8A				PDM CONTROL		1.861.813.00
			1	80	17	10				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPA-5			1	70	1	20				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	8C				PDM CONTROL		1.861.813.00
			1	80	17	23				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPA-6			1	70	1	21				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	9A				PDM CONTROL		1.861.813.00
			1	80	17	11				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPA-7			1	70	1	22				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	9C				PDM CONTROL		1.861.813.00
			1	80	17	24				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPB-0			1	70	1	14				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	10A				PDM CONTROL		1.861.813.00
			1	80	17	20				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPB-1			1	70	1	13				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	10C				PDM CONTROL		1.861.813.00
			1	80	17	7				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 141 *
 * 1.861.022.00 D820X PCM RECCDR * 86/08/27 - CO *****

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	RFMARK	ELEMNT NR.
DSPB-2			1	70	1	12				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	11A				PDM CONTROL		1.861.813.00
			1	80	17	19				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPB-3			1	70	1	11				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	11C				PDM CONTROL		1.861.813.00
			1	80	17	6				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPB-4			1	70	1	10				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	12A				PDM CONTROL		1.861.813.00
			1	80	17	18				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPB-5			1	70	1	9				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	12C				PDM CONTROL		1.861.813.00
			1	80	17	5				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPB-6			1	70	1	8				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	13A				PDM CONTROL		1.861.813.00
			1	80	17	17				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSPB-7			1	70	1	7				SIGNAL QUALITY (26-PIN FLATCABLE)		1.861.731.00
			1	80	7	13C				PDM CONTROL		1.861.813.00
			1	80	17	4				SIGNAL QUALITY DISPL.(25 PIN D-SUB)		
DSSY			4	1	10	10C				TRANSFORMATTER		1.861.895.00
			4	1	12	10C				RT/TC CCDEC		1.861.861.00
OTRI1			1	73	3	12				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	12				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	10C				DETECTOR		1.861.804.00
			4	1	11	7B				RUN PROCESSOR		1.861.860.00
			4	1	18	12				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	12				BOX-RACK 3 CONNECTOR (CABLE)		
OTRI2			1	73	3	11				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	11				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	11C				DETECTOR		1.861.804.00
			4	1	11	8B				RUN PROCESSOR		1.861.860.00
			4	1	18	11				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	11				BOX-RACK 3 CONNECTOR (CABLE)		
OTRI3			1	73	3	10				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	10				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	12C				DETECTOR		1.861.804.00
			4	1	11	9B				RUN PROCESSOR		1.861.860.00
			4	1	18	10				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	10				BOX-RACK 3 CONNECTOR (CABLE)		
OTRI4			1	73	3	9				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	9				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	13C				DETECTOR		1.861.804.00
			4	1	11	10B				RUN PROCESSOR		1.861.860.00
			4	1	18	9				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	9				BOX-RACK 3 CONNECTOR (CABLE)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 142 *
 * 1.861.022.00 D820X PCM RECCROER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEFNT NR.
DTR15			1	73	3	8				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	8				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	17C				DETECTOR		1.861.804.00
			4	1	11	11B				RUN PROCESSOR		1.861.860.00
			4	1	18	8				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	8				BOX-RACK 3 CONNECTOR (CABLE)		
DTR16			1	73	3	7				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	7				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	18C				DETECTOR		1.861.804.00
			4	1	11	12B				RUN PROCESSOR		1.861.860.00
			4	1	18	7				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	7				BOX-RACK 3 CONNECTOR (CABLE)		
CTR17			1	73	3	6				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	6				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	19C				DETECTOR		1.861.804.00
			4	1	11	13B				RUN PROCESSOR		1.861.860.00
			4	1	18	6				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	6				BOX-RACK 3 CONNECTOR (CABLE)		
DTR18			1	73	3	5				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	5				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	20C				DETECTOR		1.861.804.00
			4	1	11	14B				RUN PROCESSOR		1.861.860.00
			4	1	18	5				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	5				BOX-RACK 3 CONNECTOR (CABLE)		
CTR1			1	73	3	25				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	25				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	10A				DETECTOR		1.861.804.00
			4	1	11	7A				RUN PROCESSOR		1.861.860.00
			4	1	18	25				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	25				BOX-RACK 3 CONNECTOR (CABLE)		
DTR2			1	73	3	24				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	24				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	11A				DETECTOR		1.861.804.00
			4	1	11	8A				RUN PROCESSOR		1.861.860.00
			4	1	18	24				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	24				BOX-RACK 3 CONNECTOR (CABLE)		
DTR3			1	73	3	23				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	23				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	12A				DETECTOR		1.861.804.00
			4	1	11	9A				RUN PROCESSOR		1.861.860.00
			4	1	18	23				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	23				BOX-RACK 3 CONNECTOR (CABLE)		
DTR4			1	73	3	22				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	22				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	13A				DETECTOR		1.861.804.00
			4	1	11	10A				RUN PROCESSOR		1.861.860.00
			4	1	18	22				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	22				BOX-RACK 3 CONNECTOR (CABLE)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 143 *
 * 1.861.022.00 D820X PCM RECCROER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEFNT NR.
DTR5			1	73	3	21				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	21				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	17A				DETECTOR		1.861.804.00
			4	1	11	11A				RUN PROCESSOR		1.861.860.00
			4	1	18	21				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	21				BOX-RACK 3 CONNECTOR (CABLE)		
DTR6			1	73	3	20				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	20				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	18A				DETECTOR		1.861.804.00
			4	1	11	12A				RUN PROCESSOR		1.861.860.00
			4	1	18	20				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	20				BOX-RACK 3 CONNECTOR (CABLE)		
DTR7			1	73	3	19				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	19				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	19A				DETECTOR		1.861.804.00
			4	1	11	13A				RUN PROCESSOR		1.861.860.00
			4	1	18	19				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	19				BOX-RACK 3 CONNECTOR (CABLE)		
DTR8			1	73	3	18				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	18				REARPANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	4	20A				DETECTOR		1.861.804.00
			4	1	11	14A				RUN PROCESSOR		1.861.860.00
			4	1	18	18				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	18				BOX-RACK 3 CONNECTOR (CABLE)		
D0			1	80	6	23C				ANALCG ROUTING		1.861.814.00
			1	80	7	23A				PDM CONTROL		1.861.813.00
D1			1	80	6	23A				ANALCG ROUTING		1.861.814.00
			1	80	7	23C				PDM CONTROL		1.861.813.00
D2			1	80	6	24C				ANALCG ROUTING		1.861.814.00
			1	80	7	24A				PDM CONTROL		1.861.813.00
D3			1	80	6	24A				ANALCG ROUTING		1.861.814.00
			1	80	7	24C				PDM CONTROL		1.861.813.00
D4			1	80	6	25C				ANALCG ROUTING		1.861.814.00
			1	80	7	25A				PDM CONTROL		1.861.813.00
D5			1	80	6	25A				ANALCG ROUTING		1.861.814.00
			1	80	7	25C				PDM CONTROL		1.861.813.00
D6			1	80	6	26C				ANALCG ROUTING		1.861.814.00
			1	80	7	26A				PDM CONTROL		1.861.813.00
D7			1	80	6	26A				ANALCG ROUTING		1.861.814.00
			1	80	7	26C				PDM CONTROL		1.861.813.00
EEPDM			1	80	3	7A				PDM DEMODULATOR 1		1.861.812.00
			1	80	4	7A				PDM DEMODULATOR 2		1.861.812.00
			1	80	7	17C				PDM CONTROL		1.861.813.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 144 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
EMPH			1	80	2	19C				PDM MODULATOR		1.861.811.00
			1	80	7	17A				PDM CONTROL		1.861.813.00
FAD1			11	25	3	11			B	CONN. PARALLEL REMOTE CONTROL	JO3	
			11	27	4	21				TO CONN. PARALLEL REMOTE CONTR.	PO4	
FAC2			11	25	3	12			B	CONN. PARALLEL REMOTE CONTROL	JO3	
			11	27	4	23				TO CONN. PARALLEL REMOTE CONTR.	PO4	
FANOUT			4	1	23	12C				POWER SUPPLY		1.861.515.00
FBIWS			4	1	10	16C				TRANSFORMER		1.861.859.00
FBWS			4	1	10	16A				TRANSFORMER		1.861.859.00
FLEM			4	1	1	9B				ANALOG OUTPUT		1.861.751.00
			4	1	2	4C				ANALOG INPUT		1.861.752.00
			4	1	4	29A				GAINS CONTROL		1.861.853.00
FRMGND			11	20	31	1				TO GRP25, ELMO4/05	P21	
			11	20	31	8				TO GRP25, ELMO4/05	P21	
			11	20	50	1				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	50	8				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	25	4	1			B	CONNECTOR SMPTE/EBU BUS	JO4	
			11	25	4	9			B	CONNECTOR SMPTE/EBU BUS	JO4	
			11	25	5	1			B	CONNECTOR SMPTE/EBU BUS	JO5	
			11	25	5	9			B	CONNECTOR SMPTE/EBU BUS	JO5	
F1			4	1	10	14C				TRANSFORMER		1.861.859.00
F2			4	1	10	15A				TRANSFORMER		1.861.859.00
F3			4	1	10	15B				TRANSFORMER		1.861.859.00
GND	5-4		11	1	1	3			J	POWER CONNECTOR	PO1	
	5-4		11	2	1	1			J	EARTH CONTACT		
	4		11	2	2	1			J	EARTH CONTACT		
			11	2	3	1				EARTH CONTACT		1.010.001.53
	4		11	4	1	11			Y	LINE FILTER		
			11	20	30	1				SSDA INT. SYNCHRONIZER	P20	
			11	20	30	8				SSDA INT. SYNCHRONIZER	P20	
	0			11	27	5	1		Y	GROUND CONNECTION (WIRE FIELD)	PO5	
GNDCK1			4	1	13	7B				TIMING + TEST		1.861.862.00
			4	1	19	9				CONNECTOR 4 (TC+AES+BNC)		
			4	3	14	2				CLOCK INPUT (BNC)		
			4	3	15	2				VIDEO CLOCK INPUT (BNC)		
			4	3	26	3				BNC INTERCONNECTION (CIS)		1.861.776.00
GNDCK0			4	1	13	8B				TIMING + TEST		1.861.862.00
			4	1	19	11				CONNECTOR 4 (TC+AES+BNC)		
			4	3	13	2				CLOCK OUTPUT (BNC)		
			4	3	26	5				BNC INTERCONNECTION (CIS)		1.861.776.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 145 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
GNDDAC1			1	73	1	14				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	6	2C				ANALOG ROUTING		1.861.814.00
			1	80	14	14				BOX-RACK 1 TO REAR PANEL TD		
			4	1	1	14A				ANALOG OUTPUT		1.861.751.00
			4	1	17	14				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	14				BOX-RACK 1 CONNECTOR (CABLE)		
GNDDAC2			1	73	1	15				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	6	3C				ANALOG ROUTING		1.861.814.00
			1	80	14	15				BOX-RACK 1 TO REAR PANEL TD		
			4	1	1	18C				ANALOG OUTPUT		1.861.751.00
			4	1	17	15				CONNECTOR 2 (BACKPANEL RACK 1)		
GNDIN-1			4	1	2	15B				ANALOG INPUT		1.861.752.00
			4	1	16	12				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	4	1				CHANNEL 1 INPUT (XLR)		1.861.775.00
			4	2	21	2				CHANNEL 1 I/O (CABLE)	(CIS)	
GNDIN-2			4	1	2	17B				ANALOG INPUT		1.861.752.00
			4	1	10	10				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	2	1				CHANNEL 2 INPUT (XLR)		1.861.775.00
			4	2	22	2				CHANNEL 2 I/O (CABLE)	(CIS)	
GNDOUT-1			4	1	1	15B				ANALOG OUTPUT		1.861.751.00
			4	1	16	4				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	3	1				CHANNEL 1 OUTPUT (XLR)		1.861.775.00
			4	2	21	5				CHANNEL 1 I/O (CABLE)	(CIS)	
GNDOUT-2			4	1	1	17B				ANALOG OUTPUT		1.861.751.00
			4	1	16	2				CONNECTOR 1 (ANALOG I/O)		1.861.775.00
			4	2	1	1				CHANNEL 2 OUTPUT (XLR)		1.861.775.00
			4	2	22	5				CHANNEL 2 I/O (CABLE)	(CIS)	
GNDTCIN			4	1	19	7				CONNECTOR 4 (TC+AES+BNC)		
			4	3	8	1				TC INPUT (XLR)		
			4	3	10	2				TIME CODE I/O BOARD (CIS)		
			4	3	24	2				TC TRANSFORMER (CIS)		1.861.771.00
GNDTCOUT			4	1	19	5				CONNECTOR 4 (TC+AES+BNC)		
			4	3	7	1				TC OUTPUT (XLR)		
			4	3	10	5				TIME CODE I/O BOARD (CIS)		
			4	3	24	5				TC TRANSFORMER (CIS)		1.861.771.00
GRGND			4	3	9	1				RT OUTPUT (XLR)		
			4	3	25	1				REFERENCE TIME I/O (CIS)		
			4	3	25	5				REFERENCE TIME I/O (CIS)		
HCTR1			2	3	1	9				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00
			5	3	1	9				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00
HCTR10			2	3	1	7				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00
			5	3	1	7				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00
HCTR11			2	3	1	10				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00
			5	3	1	10				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 146 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.		
HDTR12			2	3	1	11				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HCTR2			2	3	1	12				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HCTR3			2	3	1	4				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HDTR4			2	3	1	5				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HDTR5			2	3	1	1				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HDTR6			2	3	1	8				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HDTR7			2	3	1	3				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HCTR8			2	3	1	6				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HCTR9			2	3	1	2				HEADBLOCK READ (P4) (D-SUB 25P)		1.861.801.00		
						5				HEAD-AMPLIFIER CONNECTOR (D-SUB 25)		1.861.805.00		
HI/LO			4	1	10	19A				TRANSFORMATTER		1.861.855.00		
					4	13				20A		TIMING + TEST	1.861.862.00	
HISPD			1	8C	3	22C				PDM DEMODULATOR 1		1.861.812.00		
						4				22C		PDM DEMODULATOR 2	1.861.812.00	
						7				22A		PDM CONTROL	1.861.813.00	
						1				4		30B	DETECTOR	1.861.804.00
						1				7		30B	PLAYBACK AMPLIFIER	1.861.801.00
IAN/PDM			1	8C	3	22A				PDM DEMODULATOR 1		1.861.812.00		
						4				22A		PDM DEMODULATOR 2	1.861.812.00	
						1				30		7	22C	PDM CONTROL
ICARRY			4	1	4	23A				GAINS CONTROL		1.861.853.00		
					4	1				5		23A	DAPRO INTERFACE	1.861.854.00
ICLK5			4	1	10	26B				TRANSFORMATTER		1.861.855.00		
					4	13				26B		TIMING + TEST	1.861.862.00	
ICLK6			4	1	10	26C				TRANSFORMATTER		1.861.855.00		
					4	12				26C		RT/TC CDEC	1.861.861.00	
					4	13				26C		TIMING + TEST	1.861.862.00	
ICDUT1WR			1	8C	6	30A				ANALCG ROUTING		1.861.814.00		
						7				30C		PDM CONTROL	1.861.813.00	
ICDUT2WR			1	8C	6	30C				ANALCG ROUTING		1.861.814.00		
						7				30A		PDM CONTROL	1.861.813.00	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 147 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.	
IERRL			4	1	10	4B				TRANSFORMATTER		1.861.859.00	
IMASSA			2	1	4	30A				DETECTOR		1.861.804.00	
					5	30C				WRITE AMPLIFIER		1.861.803.00	
IMON/STE			1	8C	1	31A				CUE/PG DELAY		1.861.816.00	
						2				31A		PDM MODULATOR	1.861.811.00
						3				31A		PDM DEMODULATOR 1	1.861.812.00
						4				31A		PDM DEMODULATOR 2	1.861.812.00
						7				31C		PDM CONTROL	1.861.813.00
IR-REFEX			11	25	2	13		B	B	CONNECTOR SYNCHRONIZER	J02		
						13				TO CONN- PARALLEL REMOTE CONTROL			
						3				TO CONNECTOR SYNCHRONIZER		P03	
						4				TO CONN- PARALLEL REMOTE CONTR.		P04	
IRECD1			2	1	4	28A				DETECTOR		1.861.804.00	
					5	28C				WRITE AMPLIFIER		1.861.803.00	
IRECD2			2	1	4	28C				DETECTOR		1.861.804.00	
					5	28A				WRITE AMPLIFIER		1.861.803.00	
IREC1			2	1	4	27A				DETECTOR		1.861.804.00	
					5	27C				WRITE AMPLIFIER		1.861.803.00	
IREC11			2	1	4	29A				DETECTOR		1.861.804.00	
					5	29C				WRITE AMPLIFIER		1.861.803.00	
IREC12			2	1	4	29C				DETECTOR		1.861.804.00	
					5	29A				WRITE AMPLIFIER		1.861.803.00	
IREC2			2	1	4	27C				DETECTOR		1.861.804.00	
					5	27A				WRITE AMPLIFIER		1.861.803.00	
ISPLDET			4	1	8	22C				CODEC CONTROL		1.861.857.00	
					9	17A				CODEC MEMORY		1.861.858.00	
					10	22C				TRANSFORMATTER		1.861.859.00	
ISYNC			4	1	10	20B				TRANSFORMATTER		1.861.855.00	
					11	20B				RUN PROCESSOR		1.861.860.00	
ISYRT			4	1	10	9C				TRANSFORMATTER		1.861.855.00	
					12	9C				RT/TC CDEC		1.861.861.00	
ITOSHUTE			2	1	4	31C				DETECTOR		1.861.804.00	
					6	31A				TAPE DECK MONITOR		1.861.802.00	
ITEST			4	1	10	4A				TRANSFORMATTER		1.861.855.00	
ITE2			4	1	13	23A				TIMING + TEST		1.861.862.00	
ITRAR			4	1	10	15C				TRANSFORMATTER		1.861.859.00	
IWRET			4	1	10	20C				TRANSFORMATTER		1.861.855.00	
					11	20C				RUN PROCESSOR		1.861.860.00	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 148 *
 * 1.861.022.00 DB20X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMNT NR.
IWR0UT1			2	2	1	2				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT10			2	2	1	20				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT11			2	2	1	24				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.802.CO 1.116.861.10
IWR0UT12			2	2	1	26				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT2			2	2	1	4				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT3			2	2	1	6				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT4			2	2	1	8				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT5			2	2	1	10				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT6			2	2	1	12				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT7			2	2	1	14				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT8			2	2	1	16				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
IWR0UT9			2	2	1	18				HEADBLOCK WRITE (P4) (D-SUB 25P) HEADBLOCK CONNECTOR WRITE (P4)		1.861.803.CO 1.116.861.10
I2ECCLK			4	1	5	26A				DAPRC INTERFACE TIMING + TEST		1.861.854.CO 1.861.862.CO
K-BRAKEL			11	20	43	31A				TAPE DECK PERIPHERY CONTR. WIRE FIELD (TO BRAKE SOLENOIDS) TO BRAKE SOLENOID, LEFT BRAKE SOLENOID	J04 U F M	1.82C.762.00
K-BRAKER			11	20	43	32A				TAPE DECK PERIPHERY CONTR. WIRE FIELD (TO BRAKE SOLENOIDS) TO BRAKE SOLENOID, RIGHT BRAKE SOLENOID	J04 U F M	1.82C.762.00
K-PWRUP			1	73	1	25				BOX-RACK 1 (RACK) (25 PIN D-SUB) POWER CONNECTOR RACK (25 PIN D-SUB) RACK PWR CONNECTOR (25 PIN D-SUB) BOX-RACK 1 TO REAR PANEL TO SYSTEM CONTROLLER 1 SYSTEM CONTROLLER 2		1.861.583.CO 1.861.763.CO 1.861.763.CO -/-

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 149 *
 * 1.861.022.00 DB20X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMNT NR.
<<- CONT.OF K-PWRUP			4	1	17	25				CONNECTOR 2 (BACKPANEL RACK 1) POWER SUPPLY BOX-RACK 1 CONNECTOR (CABLE)		1.861.515.00
KEY/CDIR			11	25	2	8			B	CONNECTOR SYNCHRONIZER TO CONNECTOR SYNCHRONIZER	J02 P03	
KINTAP			3	3	6	18				DATA MP KEYBOARD (FLATCABLE 26P) DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.744.CO 1.861.745.CO
KMCCH1			3	3	6	20				DATA MP KEYBOARD (FLATCABLE 26P) DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.744.CO 1.861.745.CO
KMCCH2			3	3	6	22				DATA MP KEYBOARD (FLATCABLE 26P) DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.744.CO 1.861.745.CO
KMCTC			3	3	6	26				DATA MP KEYBOARD (FLATCABLE 26P) DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.744.CO 1.861.745.CO
KMCUE1			3	3	1	19				CBUS REARPANEL RACK (C-SUB 25P M) DATA MP KEYBOARD (FLATCABLE 26P)		1.861.744.CO 1.861.746.CO
KMCUE2			3	3	6	17				DATA MP KEYBOARD (FLATCABLE 26P) DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.744.CO 1.861.745.CO
LBIT0			3	2	3	15				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBIT1			3	2	3	16				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBIT2			3	2	3	17				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBIT3			3	2	3	18				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBIT4			3	2	3	19				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBIT5			3	2	3	20				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBIT6			3	2	3	21				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBIT7			3	2	3	22				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBY0			3	2	3	26				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO
LBY1			3	2	3	25				DATA CCP KEYBOARD (FLTCAB. 26P) DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.744.CO 1.861.743.CO

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 150 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
LBY2			3	2	3	24				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	24				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
LINE1	1		11	1	1	1			J	POWER CONNECTOR	P01	
	1		11	3	1	1			J	POWER SWITCH		
	1		11	4	1	4			Y	LINE FILTER		
	1		11	4	1	5			Y	LINE FILTER		
LINE2	6		11	1	1	2			J	POWER CONNECTOR	P01	
	6		11	3	1	2			J	POWER SWITCH		
	6		11	4	1	14			Y	LINE FILTER		
	6		11	4	1	15			Y	LINE FILTER		
LCTREND			4	1	11	19C				RUN PROCESSOR		1.861.860.00
MCPRES			3	3	6	15				DATA MP KEYBOARD (FLATCABLE 26P)		1.861.746.00
			3	8	1	15				DATA MP AMPLIF (FLATCAB. SOLD. 26P)		1.861.745.00
MCGND			1	79	3	25				CAGE PWR CONNECTOR (25 PIN D-SUB)		
			1	79	4	25				POWER CONNECTOR RACK (25 PIN D-SUB)		
			1	80	6	18A				ANALOG ROUTING		1.861.814.00
			1	80	13	25				RACK PWR CONNECTOR (25 PIN D-SUB)		
			1	80	19	25				RACK-MONITOR PANEL (C-SUB CRIMP)		
			2	1	2	25				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	6	18C				TAPE DECK MONITOR		1.861.802.00
			3	3	1	25				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.744.00
			3	3	5	3				CBUS REARPANEL RACK (D-SUB 25P M)		1.912.001.30
			3	7	1	3				TO TANDEM POT (CIS 6P) J1		1.912.001.30
		3	7	1	6				TANDEM POT SOLD.		1.912.001.30	
		3	7	1	6				TANDEM POT SOLD.		1.912.001.30	
MCNTR1			1	79	3	12				CAGE PWR CONNECTOR (25 PIN D-SUB)		
			1	79	4	12				POWER CONNECTOR RACK (25 PIN D-SUB)		
			1	80	6	17C				ANALOG ROUTING		1.861.814.00
			1	80	13	12				RACK PWR CONNECTOR (25 PIN D-SUB)		
			1	80	19	12				RACK-MONITOR PANEL (C-SUB CRIMP)		
			2	1	2	12				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	6	18A				TAPE DECK MONITOR		1.861.802.00
			3	3	1	13				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
			3	3	1	13				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
MCNTR2			1	79	3	13				CAGE PWR CONNECTOR (25 PIN D-SUB)		
			1	79	4	13				POWER CONNECTOR RACK (25 PIN D-SUB)		
			1	80	6	18C				ANALOG ROUTING		1.861.814.00
			1	80	13	13				RACK PWR CONNECTOR (25 PIN D-SUB)		
MCN1			1	80	19	13				RACK-MONITOR PANEL (C-SUB CRIMP)		
			2	1	2	13				POWER DELTA MOLEX (P2) (D-SUB 25P)		1.861.895.00
			2	1	6	19A				TAPE DECK MONITOR		1.861.802.00
			3	3	1	12				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
			3	3	1	12				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
MCN2			2	1	4	24C				DETECTOR		1.861.804.00
			2	1	6	24A				TAPE DECK MONITOR		1.861.802.00
MCN3			2	1	4	25A				DETECTOR		1.861.804.00
			2	1	6	25C				TAPE DECK MONITOR		1.861.802.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 151 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
MON4			2	1	4	26A				DETECTOR		1.861.804.00
			2	1	6	26C				TAPE DECK MONITOR		1.861.802.00
MON5			2	1	4	26C				DETECTOR		1.861.804.00
			2	1	6	26A				TAPE DECK MONITOR		1.861.802.00
MPSMUTE			1	80	7	20A				PDM CONTROL		1.861.813.00
			1	80	19	4				RACK-MONITOR PANEL (D-SUB CRIMP)		
			3	3	1	4				CBUS REARPANEL RACK (D-SUB 25P M)		1.861.744.00
MPSPL1	2		3	3	3	3				AUDIO SPEAKER LEFT (CIS 5P) J4		1.861.746.00
	2		3	5	1	1				SPEAKER LEFT		71.01.0108
MPSPL2	0		3	3	3	4				AUDIO SPEAKER LEFT (CIS 5P) J4		1.861.746.00
	0		3	5	1	2				SPEAKER LEFT		71.01.0108
MPSPR1	2		3	3	2	3				AUDIO SPEAKER RIGHT (CIS 3P) J3		1.861.746.00
	2		3	4	1	1				SPEAKER RIGHT		71.01.0108
MPSPR2	0		3	3	2	2				AUDIO SPEAKER RIGHT (CIS 3P) J3		1.861.746.00
	0		3	4	1	2				SPEAKER RIGHT		71.01.0108
MVARI			4	1	11	23B				RUN PROCESSOR		1.861.860.00
			4	1	12	23B				RT/TC CEDEC		1.861.861.00
OC-RES1			11	20	43	27A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
OC-RES2			11	20	43	28A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
OC-RES3			11	20	43	29A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
OC-RES4			11	20	43	30A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
OR-CMCLK			11	25	2	11			B	CONNECTOR SYNCHRONIZER	J02	
			11	27	3	21				TO CONNECTOR SYNCHRONIZER	P03	
OR-MVCLK			11	25	2	7			B	CONNECTOR SYNCHRONIZER	J02	
			11	27	3	13				TO CONNECTOR SYNCHRONIZER	P03	
OR-MVDIR			11	25	2	10			B	CONNECTOR SYNCHRONIZER	J02	
			11	27	3	19				TO CONNECTOR SYNCHRONIZER	P03	
OR-SYENB			11	25	2	12			B	CONNECTOR SYNCHRONIZER	J02	
			11	27	3	23				TO CONNECTOR SYNCHRONIZER	P03	
P-ADDR00			4	1	14	20A				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR01			4	1	14	20B				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR02			4	1	14	20C				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR03			4	1	14	21A				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR04			4	1	14	21B				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR05			4	1	14	21C				SYSTEM CONTROLLER 1		1.861.763.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 157 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
P-ADDR06			4	1	14	22A				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR07			4	1	14	22B				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR08			4	1	14	22C				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR09			4	1	14	23A				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR10			4	1	14	23B				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR11			4	1	14	23C				SYSTEM CONTROLLER 1		1.861.763.00
P-ADDR20			4	1	15	20A				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR21			4	1	15	20B				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR22			4	1	15	20C				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR23			4	1	15	21A				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR24			4	1	15	21B				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR25			4	1	15	21C				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR26			4	1	15	22A				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR27			4	1	15	22B				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR28			4	1	15	22C				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR29			4	1	15	23A				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR30			4	1	15	23B				SYSTEM CONTROLLER 2		1.861.763.00
P-ADDR31			4	1	15	23C				SYSTEM CONTROLLER 2		1.861.763.00
P-DATA0			4	1	14	12A				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA02			4	1	15	12A				SYSTEM CONTROLLER 2		1.861.763.00
P-DATA1			4	1	14	12B				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA12			4	1	15	12B				SYSTEM CONTROLLER 2		1.861.763.00
P-DATA2			4	1	14	12C				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA22			4	1	15	12C				SYSTEM CONTROLLER 2		1.861.763.00
P-DATA3			4	1	14	13A				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA32			4	1	15	13A				SYSTEM CONTROLLER 2		1.861.763.00
P-DATA4			4	1	14	13B				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA42			4	1	15	13B				SYSTEM CONTROLLER 2		1.861.763.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 153 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
P-DATA5			4	1	14	13C				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA52			4	1	15	13C				SYSTEM CONTROLLER 2		1.861.763.00
P-DATA6			4	1	14	14A				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA62			4	1	15	14A				SYSTEM CONTROLLER 2		1.861.763.00
P-DATA7			4	1	14	14B				SYSTEM CONTROLLER 1		1.861.763.00
P-DATA72			4	1	15	14B				SYSTEM CONTROLLER 2		1.861.763.00
P-EN			4	1	14	15A				SYSTEM CONTROLLER 1		1.861.763.00
P-EN2			4	1	15	15A				SYSTEM CONTROLLER 2		1.861.763.00
P-IN1			4	1	14	16A				SYSTEM CONTROLLER 1		1.861.763.00
P-IN12			4	1	15	16A				SYSTEM CONTROLLER 2		1.861.763.00
P-IN2			4	1	14	16C				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	16C				SYSTEM CONTROLLER 2		1.861.763.00
P-RES			4	1	14	15C				SYSTEM CONTROLLER 1		1.861.763.00
P-RES2			4	1	15	15C				SYSTEM CONTROLLER 2		1.861.763.00
P-ISEL0			4	1	14	24A				SYSTEM CONTROLLER 1		1.861.763.00
P-ISEL02			4	1	15	24A				SYSTEM CONTROLLER 2		1.861.763.00
P-ISEL1			4	1	14	24B				SYSTEM CONTROLLER 1		1.861.763.00
P-ISEL12			4	1	15	24B				SYSTEM CONTROLLER 2		1.861.763.00
P-ISEL2			4	1	14	24C				SYSTEM CONTROLLER 1		1.861.763.00
P-ISEL22			4	1	15	24C				SYSTEM CONTROLLER 2		1.861.763.00
P-ISEL3			4	1	14	25A				SYSTEM CONTROLLER 1		1.861.763.00
P-ISEL32			4	1	15	25A				SYSTEM CONTROLLER 2		1.861.763.00
P-OUT1			4	1	14	17A				SYSTEM CONTROLLER 1		1.861.763.00
P-OUT12			4	1	15	17A				SYSTEM CONTROLLER 2		1.861.763.00
P-OUT2			4	1	14	17B				SYSTEM CONTROLLER 1		1.861.763.00
P-OUT22			4	1	15	17B				SYSTEM CONTROLLER 2		1.861.763.00
P-RW			4	1	14	15B				SYSTEM CONTROLLER 1		1.861.763.00
P-RW2			4	1	15	15B				SYSTEM CONTROLLER 2		1.861.763.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 154 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	Lv	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.					
PBTR1					1	73	1	10		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00					
					1	80	6	4A		ANALCG ROUTING		1.861.814.00					
					1	80	12	10		RACK-CAGE (25 PIN D-SUB)							
					1	80	14	10		BOX-RACK 1 TO REAR PANEL TD							
					2	1	3	10		BACKPANEL RACK (D-SUB 25P)		1.861.895.00					
					2	1	7	18C		PLAYBACK AMPLIFIER		1.861.801.00					
					4	1	12	10B		RT/TC CDEEC		1.861.861.00					
					4	1	17	10		CONNECTOR 2 (BACKPANEL RACK 1)							
PBTR11					1	80	3	4C		BOX-RACK 1 CONNECTOR (CABLE)							
					1	80	12	12		PDM DEMODULATOR 1		1.861.812.00					
					2	1	3	12		RACK-CAGE (25 PIN D-SUB)							
					2	1	7	20C		BACKPANEL RACK (D-SUB 25P)		1.861.895.00					
					2	1	7	20C		PLAYBACK AMPLIFIER		1.861.801.00					
					PBTR12					1	80	3	8C		PDM DEMODULATOR 1		1.861.812.00
										1	80	4	4C		PDM DEMODULATOR 2		1.861.812.00
										1	80	12	13		RACK-CAGE (25 PIN D-SUB)		
2	1	3	13							BACKPANEL RACK (D-SUB 25P)		1.861.895.00					
2	1	7	21C							PLAYBACK AMPLIFIER		1.861.801.00					
PBTR2										1	73	1	11		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
										1	80	12	11		RACK-CAGE (25 PIN D-SUB)		
										1	80	14	11		BOX-RACK 1 TO REAR PANEL TD		
					2	1	3	11		BACKPANEL RACK (D-SUB 25P)		1.861.895.00					
					2	1	7	19C		PLAYBACK AMPLIFIER		1.861.801.00					
					4	1	12	8B		RT/TC CDEEC		1.861.861.00					
					4	1	17	11		CONNECTOR 2 (BACKPANEL RACK 1)							
					4	1	50	11		BOX-RACK 1 CONNECTOR (CABLE)							
PETR1					1	73	1	23		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00					
					1	80	12	22		RACK-CAGE (25 PIN D-SUB)							
					1	80	14	23		BOX-RACK 1 TO REAR PANEL TD							
					2	1	3	22		BACKPANEL RACK (D-SUB 25P)		1.861.895.00					
					2	1	7	18A		PLAYBACK AMPLIFIER		1.861.801.00					
					4	1	12	10A		RT/TC CDEEC		1.861.861.00					
					4	1	17	23		CONNECTOR 2 (BACKPANEL RACK 1)							
					4	1	50	23		BOX-RACK 1 CONNECTOR (CABLE)							
PETR10					2	1	4	4A		DETECTOR		1.861.804.00					
					2	1	7	4A		PLAYBACK AMPLIFIER		1.861.801.00					
PETR11					1	80	3	4A		PDM DEMODULATOR 1		1.861.812.00					
					1	80	12	24		RACK-CAGE (25 PIN D-SUB)							
					2	1	3	24		BACKPANEL RACK (D-SUB 25P)		1.861.895.00					
					2	1	7	20A		PLAYBACK AMPLIFIER		1.861.801.00					
PETR12					1	80	3	8A		PDM DEMODULATOR 1		1.861.812.00					
					1	80	4	4A		PDM DEMODULATOR 2		1.861.812.00					
					1	80	12	25		RACK-CAGE (25 PIN D-SUB)							
					2	1	3	25		BACKPANEL RACK (D-SUB 25P)		1.861.895.00					
					2	1	7	21A		PLAYBACK AMPLIFIER		1.861.801.00					

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 155 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	Lv	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
PBTR2					1	73	1	24		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
					1	80	12	23		RACK-CAGE (25 PIN D-SUB)		
					1	80	14	24		BOX-RACK 1 TO REAR PANEL TD		
					2	1	3	23		BACKPANEL RACK (D-SUB 25P)		1.861.895.00
					2	1	7	19A		PLAYBACK AMPLIFIER		1.861.801.00
					4	1	12	8A		RT/TC CDEEC		1.861.861.00
					4	1	17	24		CONNECTOR 2 (BACKPANEL RACK 1)		
					4	1	50	24		BOX-RACK 1 CONNECTOR (CABLE)		
PETR3					2	1	4	1C		DETECTOR		1.861.804.00
					2	1	7	1A		PLAYBACK AMPLIFIER		1.861.801.00
PBTR4					2	1	4	1A		DETECTOR		1.861.804.00
					2	1	7	1C		PLAYBACK AMPLIFIER		1.861.801.00
PBTR5					2	1	4	2C		DETECTOR		1.861.804.00
					2	1	7	2A		PLAYBACK AMPLIFIER		1.861.801.00
PETR6					2	1	4	2A		DETECTOR		1.861.804.00
					2	1	7	2C		PLAYBACK AMPLIFIER		1.861.801.00
PETR7					2	1	4	3C		DETECTOR		1.861.804.00
					2	1	7	3A		PLAYBACK AMPLIFIER		1.861.801.00
PBTR8					2	1	4	3A		DETECTOR		1.861.804.00
					2	1	7	3C		PLAYBACK AMPLIFIER		1.861.801.00
PBTR9					2	1	4	4C		DETECTOR		1.861.804.00
					2	1	7	4A		PLAYBACK AMPLIFIER		1.861.801.00
POBCLK					1	73	1	16		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
					1	80	1	11A		CUE/PC DELAY		1.861.816.00
					1	80	14	16		BOX-RACK 1 TO REAR PANEL TD		
					4	1	5	21C		DAPRC INTERFACE		1.861.854.00
					4	1	17	16		CONNECTOR 2 (BACKPANEL RACK 1)		
PCCLK3					1	73	1	13		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
					1	80	1	2A		CUE/PC DELAY		1.861.816.00
					1	80	14	13		BOX-RACK 1 TO REAR PANEL TD		
					4	1	13	22A		TIMING + TEST		1.861.862.00
					4	1	17	13		CONNECTOR 2 (BACKPANEL RACK 1)		
PCDATA					1	73	1	18		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
					1	80	1	13A		CUE/PC DELAY		1.861.816.00
					1	80	14	18		BOX-RACK 1 TO REAR PANEL TD		
					4	1	5	20B		DAPRC INTERFACE		1.861.854.00
					4	1	17	18		CONNECTOR 2 (BACKPANEL RACK 1)		
PCIBCLK					1	73	1	3		BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
					1	80	1	11C		CUE/PC DELAY		1.861.816.00
					1	80	14	3		BOX-RACK 1 TO REAR PANEL TD		
					4	1	5	22A		DAPRC INTERFACE		1.861.854.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 156 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
<<-- CONT.OF PCIBCLK			4	1	17	3				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	3				BOX-RACK 1 CONNECTOR (CABLE)		
PCICLK3			1	73	1	12				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	1	2C				CUE/PQ DELAY		1.861.816.00
			1	80	14	12				BOX-RACK 1 TO REAR PANEL TD		
			4	1	13	22B				TIMING + TEST		1.861.862.00
			4	1	17	12				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	12				BOX-RACK 1 CONNECTOR (CABLE)		
PDIDATA			1	73	1	5				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	1	13C				CUE/PQ DELAY		1.861.816.00
			1	80	14	5				BOX-RACK 1 TO REAR PANEL TD		
			4	1	5	20C				DAPRO INTERFACE		1.861.854.00
			4	1	17	5				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	5				BOX-RACK 1 CONNECTOR (CABLE)		
PDINCLK			1	73	1	4				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	1	12C				CUE/PQ DELAY		1.861.816.00
			1	80	14	4				BOX-RACK 1 TO REAR PANEL TD		
			4	1	5	21B				DAPRO INTERFACE		1.861.854.00
			4	1	17	4				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	4				BOX-RACK 1 CONNECTOR (CABLE)		
PDWCLK			1	73	1	17				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	1	12A				CUE/PQ DELAY		1.861.816.00
			1	80	14	17				BOX-RACK 1 TO REAR PANEL TD		
			4	1	5	21A				DAPRO INTERFACE		1.861.854.00
			4	1	17	17				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	17				BOX-RACK 1 CONNECTOR (CABLE)		
PHOCON			2	4	2	2				INTERNAL PHONE CONNECTOR J2 (CIS)		1.861.802.00
			2	6	1	6				INTERNAL PHONE PLUG (SOLD.)		54.24.0102.00
PHGND			3	3	4	6				AUDIC PHONES PLUG (CIS 6P) J2		1.861.746.00
			3	6	1	6				PHONES PLUG		54.24.0102.00
PHCL			3	3	4	4				AUDIC PHONES PLUG (CIS 6P) J2		1.861.746.00
			3	6	1	4				PHONES PLUG		54.24.0102.00
PHOR			3	3	4	5				AUDIC PHONES PLUG (CIS 6P) J2		1.861.746.00
			3	6	1	5				PHONES PLUG		54.24.0102.00
PHOSELA			1	80	6	28A				ANALOG ROUTING		1.861.814.00
			1	80	7	28C				PDM CONTROL		1.861.813.00
PHSELB			1	80	6	28C				ANALOG ROUTING		1.861.814.00
			1	80	7	28A				PDM CONTROL		1.861.813.00
PHCSW			3	3	4	2				AUDIC PHONES PLUG (CIS 6P) J2		1.861.746.00
			3	6	1	2				PHONES PLUG		54.24.0102.00
PRIMV-1			11	9	1	1			Y	PRIMARY 1		1.820.521.00
			11	9	1	4			Y	PRIMARY 1		1.820.521.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 157 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
PRIMV-2			11	5	1	2			L	FUSE HOLDER	F01	53.03.0106
			11	6	1	1A			K	DISTRIBUTOR		
			11	6	1	1C			K	DISTRIBUTOR		
			11	6	1	1D			K	DISTRIBUTOR		
			11	7	1	1			J	VOLTAGE SELECTOR	S01	55.12.0001
			11	9	1	2			Y	PRIMARY 1		1.820.521.00
PRIMV-3			11	6	1	2A			K	DISTRIBUTOR		
			11	6	1	2C			K	DISTRIBUTOR		
			11	6	1	2D			K	DISTRIBUTOR		
			11	7	1	2			J	VOLTAGE SELECTOR	S01	55.12.0001
			11	7	2	1			J	VOLTAGE SELECTOR	S02	55.12.0001
			11	9	1	3			Y	PRIMARY 1		1.820.521.00
PRIMV-5			11	6	1	3A			K	DISTRIBUTOR		
			11	6	1	3C			K	DISTRIBUTOR		
			11	6	1	3D			K	DISTRIBUTOR		
			11	7	1	3			J	VOLTAGE SELECTOR	S01	55.12.0001
			11	7	2	3			J	VOLTAGE SELECTOR	S02	55.12.0001
			11	9	2	5			Y	PRIMARY 2		1.820.522.00
PRIMV-6			11	9	2	6			Y	PRIMARY 2		1.820.522.00
			11	9	2	7			Y	PRIMARY 2		1.820.522.00
PRIMW-1			11	8	1	1			Y	PRIMARY 1		1.820.521.00
			11	8	1	4			Y	PRIMARY 1		1.820.521.00
PRIMW-2			11	5	2	2			L	FUSE HOLDER	F02	53.03.0106
			11	6	1	5A			K	DISTRIBUTOR		
			11	6	1	5C			K	DISTRIBUTOR		
			11	6	1	5D			K	DISTRIBUTOR		
			11	7	3	1			J	VOLTAGE SELECTOR	S03	55.12.0001
			11	8	1	2			Y	PRIMARY 1		1.820.521.00
PRIMW-3			11	6	1	6A			K	DISTRIBUTOR		
			11	6	1	6C			K	DISTRIBUTOR		
			11	6	1	6D			K	DISTRIBUTOR		
			11	7	2	2			J	VOLTAGE SELECTOR	S02	55.12.0001
			11	7	3	2			J	VOLTAGE SELECTOR	S03	55.12.0001
			11	8	1	3			Y	PRIMARY 1		1.820.521.00
PRIMW-5			11	6	1	7A			K	DISTRIBUTOR		
			11	6	1	7C			K	DISTRIBUTOR		
			11	6	1	7D			K	DISTRIBUTOR		
			11	7	2	4			J	VOLTAGE SELECTOR	S02	55.12.0001
			11	7	3	3			J	VOLTAGE SELECTOR	S03	55.12.0001
			11	8	2	5			Y	PRIMARY 2		1.820.522.00
PRIMW-6			11	8	2	6			Y	PRIMARY 2		1.820.522.00
			11	8	2	7			Y	PRIMARY 2		1.820.522.00
PULLUP1			4	1	5	18C				DAPRO INTERFACE		1.861.854.00
PULLUP12			4	1	5	29C				DAPRO INTERFACE		1.861.854.00
PULLUP9			4	1	7	10C				COEFFICIENT GENERATOR		1.861.856.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 158 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
PwMPL-H1			11	20	1	9				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	28				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	9				FROM GRP20. ELM01	P01	
PwMPL-H2			11	20	1	10				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	34				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	10				FROM GRP20. ELM01	P01	
PwMPL-L1			11	20	1	7				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	35				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	7				FROM GRP20. ELM01	P01	
PwMPL-L2			11	20	1	8				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	32				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	8				FROM GRP20. ELM01	P01	
PwMPL-L3			11	20	1	11				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	29				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	11				FROM GRP20. ELM01	P01	
PwMPL-L4			11	20	1	12				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	33				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	12				FROM GRP20. ELM01	P01	
PwMPL-L5			11	20	1	14				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	32				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	14				FROM GRP20. ELM01	P01	
PwMPL-L6			11	20	1	15				SPOOLING MOTOR DRIVE AMP. LEFT	P01	
			11	20	40	31				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	33	2	15				FROM GRP20. ELM01	P01	
PwMPR-H1			11	20	2	9				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	7				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	9				FROM GRP20. ELM02	P01	
PwMPR-H2			11	20	2	10				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	38				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	10				FROM GRP20. ELM02	P01	
PwMPR-L1			11	20	2	7				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	35				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	7				FROM GRP20. ELM02	P01	
PwMPR-L2			11	20	2	8				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	34				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	8				FROM GRP20. ELM02	P01	
PwMPR-L3			11	20	2	11				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	8				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	11				FROM GRP20. ELM02	P01	
PwMPR-L4			11	20	2	12				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	37				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	12				FROM GRP20. ELM02	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 159 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
PwMPR-L5			11	20	2	14				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	36				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	14				FROM GRP20. ELM02	P01	
PwMPR-L6			11	20	2	15				SPOOLING MOTOR DRIVE AMP. RIGHT	P02	
			11	20	40	10				SPOOLING MOTOR DRIVER	J01	1.820.759.00
			11	30	2	15				FROM GRP20. ELM02	P01	
PwROK			4	1	14	16B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	16B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	23	12A				POWER SUPPLY		1.861.515.00
Rcv-232			11	20	50	9				SMPT/EBU INTERFACE	J11	1.820.751.00
RDHD101			5	1	2	23				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	1				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD102			5	1	2	24				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	2				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD103			5	1	2	21				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	3				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD104			5	1	2	22				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	4				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD105			5	1	2	19				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	5				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD106			5	1	2	20				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	6				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD107			5	1	2	17				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	7				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD108			5	1	2	18				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	8				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD109			5	1	2	15				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	9				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD110			5	1	2	16				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	10				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD111			5	1	2	13				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	11				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD112			5	1	2	14				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	3	12				CONNECTOR ODD TRACKS (AMP12)		1.861.805.00
RDHD201			5	1	2	11				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	2	1				CONNECTOR EVEN TRACKS (AMP12)		1.861.805.00
RDHD202			5	1	2	12				READ HEAD INTERCONNECTION (FLEXI)		1.116.861.20
			5	3	2	2				CONNECTOR EVEN TRACKS (AMP12)		1.861.805.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 160 *

 * 1.861.022.00 D820X PCM RECCORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
RDHD203			5	1	2	9				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD204			5	1	2	10				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD205			5	1	2	7				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD206			5	1	2	8				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD207			5	1	2	5				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD208			5	1	2	6				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD209			5	1	2	9				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD210			5	1	2	4				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD211			5	1	2	1				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RDHD212			5	1	2	2				READ HEAD INTERCONNECTION (FLEX1) CONNECTOR EVEN TRACKS (AMP12)		1.116.861.20 1.861.805.00
RECEIVA			11	20	31	6				TO GRP25, ELMO4/05 SMPTE/ERU INTERFACE CONNECTOR SMPTE/ERU BUS	P21 J11 J04	1.820.751.00
RECEIVB			11	20	31	5				TO GRP25, ELMO4/05 SMPTE/ERU INTERFACE CONNECTOR SMPTE/ERU BUS	P21 J11 J04	1.820.751.00
RECEIVCH			11	20	31	7				TO GRP25, ELMO4/05 SMPTE/ERU INTERFACE CONNECTOR SMPTE/ERU BUS	P21 J11 J04	1.820.751.00
RESHPG1			4	1	10	11C				TRANSFORMATTER RT/TC CODEC		1.861.859.00 1.861.861.00
RESHPG2			4	1	10	12A				TRANSFORMATTER RT/TC CODEC		1.861.859.00 1.861.861.00
RES1			1	80	1	19C				CUE/PQ DELAY PDM MODULATOR		1.861.816.00 1.861.811.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 161 *

 * 1.861.022.00 D820X PCM RECCORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
RES10			1	80	3	24A				PDM DEMODULATOR 1 PDM DEMODULATOR 2 GAINS CONTROL		1.861.812.00 1.861.812.00 1.861.853.00
RES11			1	80	3	24C				PDM DEMODULATOR 1 PDM DEMODULATOR 2 GAINS CONTROL		1.861.812.00 1.861.812.00 1.861.853.00
RES12			1	80	3	25A				PDM DEMODULATOR 1 PDM DEMODULATOR 2 GAINS CONTROL		1.861.812.00 1.861.812.00 1.861.853.00
RES13			1	80	3	25C				PDM DEMODULATOR 1 PDM DEMODULATOR 2		1.861.812.00 1.861.812.00
RES14			1	80	3	26A				PDM DEMODULATOR 1 PDM DEMODULATOR 2		1.861.812.00 1.861.812.00
RES15			1	80	3	26C				PDM DEMODULATOR 1 PDM DEMODULATOR 2 DATA PROCESSOR COEFFICIENT GENERATOR		1.861.812.00 1.861.812.00 1.861.855.00 1.861.856.00
RES16			1	80	3	21A				PDM DEMODULATOR 1 PDM DEMODULATOR 2 PDM CONTROL DATA PROCESSOR COEFFICIENT GENERATOR		1.861.812.00 1.861.812.00 1.861.813.00 1.861.855.00 1.861.856.00
RES17			1	80	3	21C				PDM DEMODULATOR 1 PDM DEMODULATOR 2 PDM CONTROL DATA PROCESSOR COEFFICIENT GENERATOR		1.861.812.00 1.861.812.00 1.861.813.00 1.861.855.00 1.861.856.00
RES18			1	80	6	27C				ANALOG ROUTING PDM CONTROL DATA PROCESSOR COEFFICIENT GENERATOR		1.861.814.00 1.861.813.00 1.861.855.00 1.861.856.00
RES19			1	80	6	27A				ANALOG ROUTING PDM CONTROL DATA PROCESSOR COEFFICIENT GENERATOR		1.861.814.00 1.861.813.00 1.861.855.00 1.861.856.00
RES2			1	80	1	28C				CUE/PQ DELAY PDM MODULATOR		1.861.816.00 1.861.811.00
RES20			4	1	6	7C				DATA PROCESSOR COEFFICIENT GENERATOR		1.861.855.00 1.861.856.00
RES21			4	1	6	8A				DATA PROCESSOR COEFFICIENT GENERATOR		1.861.855.00 1.861.856.00
RES22			4	1	7	23C				COEFFICIENT GENERATOR CODEC MEMORY		1.861.856.00 1.861.858.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 162 *
 * 1.861.022.00 D820X PCM RECCORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLFMNT NR.
RES3			1	80	1	29C				CUE/PG DELAY		1.861.816.00
			1	80	2	29A				PDM MODULATOR		1.861.811.00
			4	1	4	21C				GAINS CONTROL		1.861.853.00
			4	1	6	21C				DATA PRCESSOR		1.861.855.00
RES4			1	80	1	30C				CUE/PG DELAY		1.861.816.00
			1	80	2	30A				PDM MODULATOR		1.861.811.00
			4	1	4	24A				GAINS CONTROL		1.861.853.00
			4	1	6	22B				DATA PRCESSOR		1.861.855.00
RES5			1	80	2	28C				PDM MODULATOR		1.861.811.00
			1	80	3	28A				PDM CEMDULATOR 1		1.861.812.00
			4	1	4	24B				GAINS CONTROL		1.861.853.00
			4	1	6	24A				DATA PRCESSOR		1.861.855.00
RES6			1	80	2	29C				PDM MODULATOR		1.861.811.00
			1	80	3	29A				PDM CEMDULATOR 1		1.861.812.00
RES7			1	80	2	30C				PDM MODULATOR		1.861.811.00
			1	80	3	30A				PDM CEMDULATOR 1		1.861.812.00
RES8			1	80	3	23A				PDM CEMDULATOR 1		1.861.812.00
			1	80	4	23C				PDM CEMDULATOR 2		1.861.812.00
			4	1	4	25C				GAINS CONTROL		1.861.853.00
RES9			1	80	3	23C				PDM CEMDULATOR 1		1.861.812.00
			1	80	4	23A				PDM CEMDULATOR 2		1.861.812.00
			4	1	4	26A				GAINS CONTROL		1.861.853.00
RPTREND			4	1	11	19B				RUN PROCESSOR		1.861.860.00
RTIOUT			4	1	12	22B				RT/TC CDEEC		1.861.861.00
			4	1	19	13				CONNECTOR 4 (TC+AES+BNC)		
			4	1	20	6				CONNECTOR 5 (TC+EXT CLK)		
			4	3	9	3				RT CUTPUT (XLR)		
			4	3	25	7				REFERENCE TIME I/O (CIS)		
RTOUT			4	1	12	22A				RT/TC CDEEC		1.861.861.00
			4	1	19	12				CONNECTOR 4 (TC+AES+BNC)		
			4	1	20	19				CONNECTOR 5 (TC+EXT CLK)		
			4	3	9	2				RT CUTPUT (XLR)		
			4	3	25	6				REFERENCE TIME I/O (CIS)		
RTSYNC			4	1	10	8C				TRANSFORMATER		1.861.859.00
			4	1	12	8C				RT/TC CDEEC		1.861.861.00
			4	1	13	9C				TIMING + TEST		1.861.862.00
S-LINE1			11	3	1	3			J	POWER SWITCH		
			11	4	1	1			Y	LINE FILTER		
			11	4	1	2			L	LINE FILTER		
S-LINE2			11	3	1	4			J	POWER SWITCH		
			11	4	1	12			L	LINE FILTER		
			11	4	1	16			Y	LINE FILTER		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 163 *
 * 1.861.022.00 D820X PCM RECCORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
SACLK			1	80	1	17C				CUE/PG DELAY		1.861.816.00
			1	80	2	17A				PDM MODULATOR		1.861.811.00
SAH1			1	80	1	18C				CUE/PG DELAY		1.861.816.00
			1	80	2	18A				PDM MODULATOR		1.861.811.00
SAH2			1	80	1	18A				CUE/PG DELAY		1.861.816.00
			1	80	2	18C				PDM MODULATOR		1.861.811.00
SAMPCLK			4	1	13	4A				TIMING + TEST		1.861.862.00
			4	1	23	10B				POWER SUPPLY		1.861.515.00
SAMP1CLK			4	1	13	4B				TIMING + TEST		1.861.862.00
			4	1	23	10C				POWER SUPPLY		1.861.515.00
SBIT0			3	2	3	4				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	4				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBIT1			3	2	3	5				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	5				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBIT2			3	2	3	6				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	6				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBIT3			3	2	3	7				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	7				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBIT4			3	2	3	8				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	8				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBIT5			3	2	3	9				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	9				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBIT6			3	2	3	10				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	10				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBIT7			3	2	3	11				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	11				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBY0			3	2	3	14				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	14				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBY1			3	2	3	13				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	13				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SBY2			3	2	3	12				DATA CCP KEYBOARD (FLTCAB. 26P)		1.861.744.00
			3	10	1	12				DATA CCP TRANSCEIV. (FLATCABLE 26P)		1.861.743.00
SECSYN			4	1	4	22C				GAINS CONTROL		1.861.853.00
			4	1	10	13C				TRANSFORMATER		1.861.859.00
			4	1	10	19B				TRANSFORMATER		1.861.859.00
			4	1	13	20B				TIMING + TEST		1.861.862.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 164 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
SF-LINE1	1		11	4	1	8			Y	LINE FILTER		
	3		11	4	1	9			L	LINE FILTER		
	1		11	4	1	10			Y	LINE FILTER		
	1		11	5	1	1			L	FUSE HOLDER.	F01	53.03.0106
	1		11	5	2	1			L	FUSE HOLDER.	F02	53.03.0106
SF-LINE2	3		11	4	1	19			L	LINE FILTER		
	4		11	4	1	20			Y	LINE FILTER		
	8		11	4	1	21			Y	LINE FILTER		
	4		11	6	1	4A			K	DISTRIBUTOR		
	4		11	6	1	4C			K	DISTRIBUTOR		
	4		11	6	1	4D			K	DISTRIBUTOR		
	3		11	6	1	8A			K	DISTRIBUTOR		
	3		11	6	1	8C			K	DISTRIBUTOR		
	3		11	6	1	8D			K	DISTRIBUTOR		
	4		11	7	1	4			J	VOLTAGE SELECTOR	S01	55.12.0001
3		11	7	3	4			J	VOLTAGE SELECTOR	S03	55.12.0001	
3		11	8	2	8			Y	PRIMARY 2		1.820.522.00	
4		11	9	2	8			Y	PRIMARY 2		1.820.522.00	
SHIELD			11	25	1	1			B	CONN. AUTOLCCATOR. REMOTE TIMER	J01	
			11	26	2	1				TO GRP25, ELMO1	P02	
SIGN-GRU			11	25	1	8			B	CONN. AUTOLCCATOR. REMOTE TIMER	J01	
			11	26	2	6				TO GRP25, ELMO1	P02	
SLR			4	1	10	7C				TRANSFERMATTER		1.861.859.00
			4	1	12	24C				RT/TC CDECE		1.861.861.00
SND-232			11	20	50	14				SMPTE/EBU INTERFACE	J11	1.820.751.00
SPARE			11	20	31	9				TO GRP25, ELMO4/05	P21	
			11	25	4	5			B	CONNECTOR SMPTE/EBU BUS	J04	
			11	25	5	5			B	CONNECTOR SMPTE/EBU BUS	J05	
SPARE50			2	1	4	30C				DETECTOR		1.861.804.00
			2	1	5	30A				WRITE AMPLIFIER		1.861.803.00
SPARE51			2	1	4	24B				DETECTOR		1.861.804.00
			2	1	7	24B				PLAYBACK AMPLIFIER		1.861.801.00
SPARE52			2	1	4	25B				DETECTOR		1.861.804.00
			2	1	7	25B				PLAYBACK AMPLIFIER		1.861.801.00
SPARE53			2	1	4	31A				DETECTOR		1.861.804.00
			2	1	5	31C				WRITE AMPLIFIER		1.861.803.00
SPARE55			4	1	4	20B				GAINS CONTROL		1.861.853.00
			4	1	6	20B				DATA PROCESSOR		1.861.855.00
SPLINIT			4	1	4	21B				GAINS CONTROL		1.861.853.00
			4	1	5	20A				DAPRC INTERFACE		1.861.854.00
			4	1	6	20A				DATA PROCESSOR		1.861.855.00
SR-FADRY			11	25	3	6				CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	4	11				TO CONN. PARALLEL REMOTE CONTR.	P04	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 165 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
SR-FORM			11	25	2	21			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	21			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	16				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	16				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-LIFT			11	25	2	17			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	17			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	8				TO CONNECTOR SYNCHRONIZER	P03	
SR-LOCST			11	25	3	18			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	4	10				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-MUTE			11	25	2	18			B	CONNECTOR SYNCHRONIZER	J02	
			11	27	3	10				TO CONNECTOR SYNCHRONIZER	P03	
SR-PLAY			11	25	2	22			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	22			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	18				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	18				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-REC			11	25	2	19			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	19			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	12				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	12				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-REHSL			11	25	2	6			B	CONNECTOR SYNCHRONIZER	J02	
			11	27	3	11				TO CONNECTOR SYNCHRONIZER	P03	
SR-RESET			11	25	3	10			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	4	19				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-REW			11	25	2	20			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	20			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	14				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	14				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-STOP			11	25	2	23			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	23			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	20				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	20				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-VRSPD			11	25	2	5			B	CONNECTOR SYNCHRONIZER	J02	
			11	25	3	5			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	3	9				TO CONNECTOR SYNCHRONIZER	P03	
			11	27	4	9				TO CONN. PARALLEL REMOTE CONTR.	P04	
SR-OLGC			11	25	3	14			B	CONN. PARALLEL REMOTE CONTROL	J03	
			11	27	4	2				TO CONN. PARALLEL REMOTE CONTR.	P04	
SSDACLK			1	73	2	14				BOX-RACK 2 (TRACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	14				BOX-RACK 2 TO REAR PANEL TO		1.861.583.00
			1	80	22	8				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	7A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	7A				SYSTEM CONTROLLER 2		1.861.763.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 167 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMNT NR.
SSDAIMRX			1	73	2	4				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	4				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	26				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	11B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	11B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	4				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	4				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	26				TO ASSY1, GR80, EL22 P25		
		11	20	51	32B				MASTER SYSCON INTERFACE J12		1.861.721.00	
SSDAIMTX			1	73	2	3				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	3				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	14				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	8B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	8B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	3				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	3				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	14				TO ASSY1, GR80, EL22 P25		
		11	20	51	26B				MASTER SYSCON INTERFACE J12		1.861.721.00	
SSDAMRX			1	73	2	17				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	17				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	24				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	11A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	11A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	17				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	17				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	24				TO ASSY1, GR80, EL22 P25		
		11	20	51	31B				MASTER SYSCON INTERFACE J12		1.861.721.00	
SSDAMTX			1	73	2	16				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	16				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	12				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	8A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	8A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	16				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	16				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	12				TO ASSY1, GR80, EL22 P25		
		11	20	51	25B				MASTER SYSCON INTERFACE J12		1.861.721.00	
SWITCGND	1		3	3	3	5				AUDIC SPEAKER LEFT (CIS 5P) J4		1.861.746.00
SWITCH	1		3	3	3	1				AUDIC SPEAKER LEFT (CIS 5P) J4		1.861.746.00
SWTR			1	80	1	17A				CUE/PG DELAY		1.861.816.00
			1	80	2	17C				PDM MODULATOR		1.861.811.00
SY/HDCKO			4	1	13	8A				TIMING + TEST		1.861.862.00
			4	1	19	24				CONNECTOR 4 (TC+AES+BNC)		
			4	3	13	1				CLOCK OUTPUT (BNC)		
			4	3	26	6				BNC INTERCONNECTION (CIS)		1.861.776.00
SYS-CTS			11	20	30	3				SSDA INT. SYNCHRONIZER P20		
			11	20	48	13B				MASTER SERIAL INTERFACE J09		1.820.753.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 166 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMNT NR.
<<-- CONT.OF SSDACLK			4	1	22	14				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	14				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	8				TO ASSY1, GR80, EL22 P25		
			11	20	51	23B				MASTER SYSCON INTERFACE J12		1.861.721.00
SSDACTS			1	73	2	18				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	18				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	20				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	9A				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	9A				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	18				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	18				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	20				TO ASSY1, GR80, EL22 P25		
		11	20	51	29B				MASTER SYSCON INTERFACE J12		1.861.721.00	
SSDAICLK			1	73	2	1				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	1				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	10				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	7B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	7B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	1				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	1				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	10				TO ASSY1, GR80, EL22 P25		
		11	20	51	24B				MASTER SYSCON INTERFACE J12		1.861.721.00	
SSDAICTS			1	73	2	5				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	5				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	22				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	9B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	9B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	5				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	5				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	22				TO ASSY1, GR80, EL22 P25		
		11	20	51	30B				MASTER SYSCON INTERFACE J12		1.861.721.00	
SSDAIDTR			1	73	2	2				BOX-RACK 2 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	15	2				BOX-RACK 2 TO REAR PANEL TD		1.861.583.00
			1	80	22	18				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			4	1	14	10B				SYSTEM CONTROLLER 1		1.861.763.00
			4	1	15	10B				SYSTEM CONTROLLER 2		1.861.763.00
			4	1	22	2				CONNECTOR 7 (BACKPANEL RACK 2)		
			4	1	51	2				BOX-RACK 2 CONNECTOR (CABLE)		
			11	20	33	18				TO ASSY1, GR80, EL22 P25		
		11	20	51	28B				MASTER SYSCON INTERFACE J12		1.861.721.00	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 16A *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
SYS-DTR			11	20	30	5				SSDA INT. SYNCHRONIZER	P20	
			11	20	48	13A				MASTER SERIAL INTERFACE	J09	1.870.753.00
SYS-RX			11	20	30	4				SSDA INT. SYNCHRONIZER	P20	
			11	20	48	12A				MASTER SERIAL INTERFACE	J09	1.870.753.00
SYS-TX			11	20	30	6				SSDA INT. SYNCHRONIZER	P20	
			11	20	48	12B				MASTER SERIAL INTERFACE	J09	1.870.753.00
SYSCFS1			4	1	11	22C				RUN PROCESSOR		1.861.860.00
			4	1	12	22C				RT/TC CCDEC		1.861.861.00
SYSCFS2			4	1	11	23A				RUN PROCESSOR		1.861.860.00
			4	1	12	23A				RT/TC CCDEC		1.861.861.00
SYMDIOUT			4	1	13	14B				TIMING + TEST		1.861.862.00
			4	1	20	1				CONNECTOR 5 (TC+EXT CLK)		
			4	3	11	1				TC + EXTERNAL CLK CONNECTOR		
SYMDOUT			4	1	13	14A				TIMING + TEST		1.861.862.00
			4	1	20	14				CONNECTOR 5 (TC+EXT CLK)		
			4	3	11	14				TC + EXTERNAL CLK CONNECTOR		
T-A0			11	26	1	12				FROM GRP27, ELM01	P01	
			11	27	1	12				TO GRP26, ELM01	P01	
T-A1			11	26	1	9				FROM GRP27, ELM01	P01	
			11	27	1	9				TO GRP26, ELM01	P01	
T-A2			11	26	1	10				FROM GRP27, ELM01	P01	
			11	27	1	10				TO GRP26, ELM01	P01	
T-A3			11	26	1	7				FROM GRP27, ELM01	P01	
			11	27	1	7				TO GRP26, ELM01	P01	
T-B0			11	26	1	8				FROM GRP27, ELM01	P01	
			11	27	1	8				TO GRP26, ELM01	P01	
T-B0			11	26	1	15				FROM GRP27, ELM01	P01	
			11	27	1	15				TO GRP26, ELM01	P01	
T-B1			11	26	1	13				FROM GRP27, ELM01	P01	
			11	27	1	13				TO GRP26, ELM01	P01	
T-B2			11	26	1	14				FROM GRP27, ELM01	P01	
			11	27	1	14				TO GRP26, ELM01	P01	
T-B3			11	26	1	11				FROM GRP27, ELM01	P01	
			11	27	1	11				TO GRP26, ELM01	P01	
T-DT-GH1			11	20	18	12				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	12				SOURCE SELECTOR	P19	
			11	20	51	38				MASTER SYSCON INTERFACE	J12	1.861.721.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 16A *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
T-DT-GH2			11	20	18	13				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	13				SOURCE SELECTOR	P19	
			11	20	51	4A				MASTER SYSCON INTERFACE	J12	1.861.721.00
T-DT-GH3			11	20	18	14				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	14				SOURCE SELECTOR	P19	
			11	20	51	4B				MASTER SYSCON INTERFACE	J12	1.861.721.00
T-DT-MP			11	20	17	15				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	15				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	15				SOURCE SELECTOR	P19	
			11	20	51	5A				MASTER SYSCON INTERFACE	J12	1.861.721.00
T-DT-RES			11	20	17	16				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	16				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	16				SOURCE SELECTOR	P19	
			11	20	51	8A				MASTER SYSCON INTERFACE	J12	1.861.721.00
T-DT-RP1			11	20	17	12				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	51	5B				MASTER SYSCON INTERFACE	J12	1.861.721.00
T-DT-RP2			11	20	17	13				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	51	6A				MASTER SYSCON INTERFACE	J12	1.861.721.00
T-DT-SJM			11	20	17	14				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	51	7A				MASTER SYSCON INTERFACE	J12	1.861.721.00
T-IRES2			11	20	43	8B				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
			11	20	43	19A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
T-IRES3			11	20	43	22A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
T-IRES4			11	20	43	23A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
T-IRES5			11	20	43	24A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
T-IRES6			11	20	43	25A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
T-IRES7			11	20	43	26A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
T-GE			11	26	1	20				FROM GRP27, ELM01	P01	
			11	27	1	20				TO GRP26, ELM01	P01	
T-QRES2			11	20	43	5A				TAPE DECK PERIPHERY CONTR.	J04	1.870.762.00
T-QRES3			11	20	48	21A				MASTER SERIAL INTERFACE	J09	1.870.753.00
T-PWRUN	5		1	79	1	7				POWER CONNECTOR (24 PIN MOLEX FEM)		
	5		1	79	2	7				POWER CONNECTOR (24 PIN MOLEX MALE)		
	5		11	19	1	7				FROM GRP32, ELM02	J01	
	5		11	19	2	7				TO GRP21, ELM02	P01	
	5		11	20	46	14				MP-UNIT TO CONTROL	J07	1.870.785.00
	5		11	20	49	14				MP-UNIT MASTER	J10	1.870.786.00
	5		11	20	62	14				WIRE FIELD		
	5		11	20	70	7				FROM GRP21, ELM01	J13	
	5		11	32	2	7				OUTPUT	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 170 *
 * 1-861-022-00 D820X PCM RECORDER * 86/08/27 - CC *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
T-READSL			11	20	17	10				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	10				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	10				SOURCE SELECTOR	P19	
			11	20	51	28				MASTER SYSCON INTERFACE	J12	1-861-721-00
T-REFEXT			11	20	16	15				PARALLEL REMOTE CONTROL	P16	
			11	20	42	12B				CAPSTAN INTERFACE	J03	1-820-727-00
			11	20	51	10A				MASTER SYSCON INTERFACE	J12	1-861-721-00
			11	27	2	15				FROM GRP20, ELM16	P02	
T-REFINT			11	20	4	12				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	42	11B				CAPSTAN INTERFACE	J03	1-820-727-00
			11	20	51	13B				MASTER SYSCON INTERFACE	J12	1-861-721-00
T-RESET			11	26	1	24				FROM GRP27, ELM01	P01	
			11	27	1	24				TO GRP26, ELM01	P01	
T-RL0			11	26	1	4				FROM GRP27, ELM01	P01	
			11	27	1	4				TO GRP26, ELM01	P01	
T-RL1			11	26	1	5				FROM GRP27, ELM01	P01	
			11	27	1	5				TO GRP26, ELM01	P01	
T-RL2			11	26	1	26				FROM GRP27, ELM01	P01	
			11	27	1	26				TO GRP26, ELM01	P01	
T-RL3			11	26	1	25				FROM GRP27, ELM01	P01	
			11	27	1	25				TO GRP26, ELM01	P01	
T-RL4			11	26	1	23				FROM GRP27, ELM01	P01	
			11	27	1	23				TO GRP26, ELM01	P01	
T-RL5			11	26	1	22				FROM GRP27, ELM01	P01	
			11	27	1	22				TO GRP26, ELM01	P01	
T-RL6			11	26	1	19				FROM GRP27, ELM01	P01	
			11	27	1	19				TO GRP26, ELM01	P01	
T-RL7			11	26	1	18				FROM GRP27, ELM01	P01	
			11	27	1	18				TO GRP26, ELM01	P01	
T-SADA			11	20	17	7				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	7				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	7				SOURCE SELECTOR	P19	
			11	20	51	1A				MASTER SYSCON INTERFACE	J12	1-861-721-00
T-SADB			11	20	17	8				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	8				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	8				SOURCE SELECTOR	P19	
			11	20	51	1B				MASTER SYSCON INTERFACE	J12	1-861-721-00
T-SADC			11	20	17	9				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	9				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	9				SOURCE SELECTOR	P19	
			11	20	51	2A				MASTER SYSCON INTERFACE	J12	1-861-721-00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 171 *
 * 1-861-022-00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
T-SL0			11	26	1	16				FROM GRP27, ELM01	P01	
			11	27	1	16				TO GRP26, ELM01	P01	
T-SL1			11	26	1	17				FROM GRP27, ELM01	P01	
			11	27	1	17				TO GRP26, ELM01	P01	
T-SL2			11	26	1	21				FROM GRP27, ELM01	P01	
			11	27	1	21				TO GRP26, ELM01	P01	
T-SL3			11	26	1	6				FROM GRP27, ELM01	P01	
			11	27	1	6				TO GRP26, ELM01	P01	
T-SPDSL1			11	39	1	11				FROM GRP20, ELM03	P01	
T-SPDSL2			11	39	1	12				FROM GRP20, ELM03	P01	
T-SUPVON			11	20	14	6				FUSE FAILURE DETECTOR	P14	
			11	20	43	10B				TAPE DECK PERIPHERY CONTR.	J04	1-820-762-00
			11	59	1	6				FROM GRP20, ELM14	P01	
T-VARSPU			11	20	18	21				VU-METER PANEL, EXTERNAL	P18	
T-WRTSL			11	20	17	11				TO HEAD BLOCK ASSEMBLY	P17	
			11	20	18	11				VU-METER PANEL, EXTERNAL	P18	
			11	20	19	11				SOURCE SELECTOR	P19	
			11	20	51	3A				MASTER SYSCON INTERFACE	J12	1-861-721-00
TA-AUIR			11	20	48	21B				MASTER SERIAL INTERFACE	J09	1-820-753-00
			11	20	51	11A				MASTER SYSCON INTERFACE	J12	1-861-721-00
TAD-RESA			1	80	22	2				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			11	20	33	2				TO ASSY1, GR80, EL22	P25	
			11	20	51	20B				MASTER SYSCON INTERFACE	J12	1-861-721-00
TAD-RESB			1	80	22	4				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			11	20	33	4				TO ASSY1, GR80, EL22	P25	
			11	20	51	21B				MASTER SYSCON INTERFACE	J12	1-861-721-00
TAD-RESC			1	80	22	6				RACK-TAPE DECK (SSDA) (26 PIN FLAT)		
			11	20	33	6				TO ASSY1, GR80, EL22	P25	
			11	20	51	22B				MASTER SYSCON INTERFACE	J12	1-861-721-00
TANTR1			3	3	5	6				TO TANDEM PCT (CIS 6P) J1		1-912-001-30
			3	7	1	1				TANDEM PCT SOLD.		1-912-001-30
TANTR2			3	3	5	1				TO TANDEM PCT (CIS 6P) J1		1-912-001-30
			3	7	1	5				TANDEM PCT SOLD.		1-912-001-30
TAPETYPE			4	1	11	23C				RUN PROCESSOR		1-861-860-00
			4	1	12	23C				RT/TC CCDEC		1-861-861-00
TAVAR1			3	3	5	5				TO TANDEM PCT (CIS 6P) J1		1-912-001-30
			3	7	1	2				TANDEM PCT SOLD.		1-912-001-30
TAVAR2			3	3	5	2				TO TANDEM PCT (CIS 6P) J1		1-912-001-30
			3	7	1	4				TANDEM PCT SOLD.		1-912-001-30

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 172 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TC-ADR3			11	20	34	23				INT. SYNCHRONIZER	P24	
			11	20	41	31				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	24A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-ADR1			11	20	34	21				INT. SYNCHRONIZER	P24	
			11	20	41	30				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	23A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-ADR2			11	20	34	19				INT. SYNCHRONIZER	P24	
			11	20	41	29				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	22A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-CAPOC			11	20	3	14				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	20	41	4				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	39	1	14				FROM GRP20. ELMC3	P01	
TC-CDIR1			11	20	41	6				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	1A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-CPREF			11	20	3	13				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	39	1	13				FROM GRP20. ELMC3	P01	
TC-DATA0			11	20	34	35				INT. SYNCHRONIZER	P24	
			11	20	41	39				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	32A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-DATA1			11	20	34	37				INT. SYNCHRONIZER	P24	
			11	20	41	38				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	31A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-DATA2			11	20	34	35				INT. SYNCHRONIZER	P24	
			11	20	41	37				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	30A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-DATA3			11	20	34	33				INT. SYNCHRONIZER	P24	
			11	20	41	36				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	29A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-DATA4			11	20	34	31				INT. SYNCHRONIZER	P24	
			11	20	41	35				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	28A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-DATA5			11	20	34	29				INT. SYNCHRONIZER	P24	
			11	20	41	34				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	27A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-DATA6			11	20	34	27				INT. SYNCHRONIZER	P24	
			11	20	41	33				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	26A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-DATA7			11	20	34	25				INT. SYNCHRONIZER	P24	
			11	20	41	32				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	25A				CAPSTAN INTERFACE	J03	1.820.727.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 173 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TC-ENB			11	20	34	17				INT. SYNCHRONIZER	P24	
			11	20	41	28				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	21A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-ENBG			11	20	34	7				INT. SYNCHRONIZER	P24	
			11	20	41	11				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	8B				CAPSTAN INTERFACE	J03	1.820.727.00
TC-EREF			11	20	41	14				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	10B				CAPSTAN INTERFACE	J03	1.820.727.00
TC-HALL1			11	38	1	4			F	FROM GRP39. ELMC2	J01	
			11	39	2	4			M	TO GRP38. ELM01	P02	
TC-HALL2			11	38	1	7			F	FROM GRP39. ELMC2	J01	
			11	39	2	7			P	TO GRP38. ELM01	P02	
TC-HALL3			11	38	1	10			F	FROM GRP39. ELMC2	J01	
			11	39	2	10			P	TO GRP38. ELM01	P02	
TC-INEX			11	20	41	9				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	12A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-IRQ			11	20	34	5				INT. SYNCHRONIZER	P24	
			11	20	41	13				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	9A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-REF			11	20	41	8				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	11A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-REFP			11	20	41	3				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	4B				CAPSTAN INTERFACE	J03	1.820.727.00
TC-RESMP			11	20	34	9				INT. SYNCHRONIZER	P24	
			11	20	41	10				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	8A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-RW			11	20	34	15				INT. SYNCHRONIZER	P24	
			11	20	41	27				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	20A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-SL1			11	20	41	24				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	13A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-SL2			11	20	41	23				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	14A				CAPSTAN INTERFACE	J03	1.820.727.00
TC-SL3			11	20	34	1				INT. SYNCHRONIZER	P24	
			11	20	41	16				CAPSTAN CONTROL UNIT	J02	1.820.764.00
TC-SL4			11	20	34	3				INT. SYNCHRONIZER	P24	
			11	20	41	15				CAPSTAN CONTROL UNIT	J02	1.820.764.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 174 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMNT NR.
TC-TCDIR			11	20	4	8				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	16	18				PARALLEL REMOTE CONTRL	P16	
			11	20	42	6A				CAPSTAN INTERFACE	J03	1.820.777.00
			11	20	42	6B				CAPSTAN INTERFACE	J03	1.820.777.00
			11	27	2	18				FROM GRP20. ELM16	P02	
TC-TCHV			11	20	4	10				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	16	17				PARALLEL REMOTE CONTRL	P16	
			11	20	42	5A				CAPSTAN INTERFACE	J03	1.820.727.00
			11	20	42	5B				CAPSTAN INTERFACE	J03	1.820.727.00
			11	27	2	17				FROM GRP20. ELM16	P02	
TC-TCHVI			11	20	41	5				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	2A				CAPSTAN INTERFACE	J03	1.820.727.00
TCJIN			4	1	12	16B				RT/TC CDEEC		
			4	1	19	21				CONNECTOR 4 (TC+AES+BNC)		1.861.861.00
			4	1	20	5				CONNECTOR 5 (TC+EXT CLK)		
			4	3	8	3				TC INPUT (XLR)		
			4	3	10	4				TIME CODE I/O BOARD (CIS)		
			4	3	11	5				TC + EXTERNAL CLK CONNECTOR		
TCIN			4	1	12	16A				RT/TC CDEEC		1.861.861.00
			4	1	19	20				CONNECTOR 4 (TC+AES+BNC)		
			4	1	20	18				CONNECTOR 5 (TC+EXT CLK)		
			4	3	8	2				TC INPUT (XLR)		
			4	3	10	3				TIME CODE I/O BOARD (CIS)		
			4	3	11	18				TC + EXTERNAL CLK CONNECTOR		
TCIOUT			4	1	12	17B				RT/TC CDEEC		1.861.861.00
			4	1	19	19				CONNECTOR 4 (TC+AES+BNC)		
			4	1	20	4				CONNECTOR 5 (TC+EXT CLK)		
			4	3	7	3				TC OUTPUT (XLR)		
			4	3	10	7				TIME CODE I/O BOARD (CIS)		
			4	3	11	4				TC + EXTERNAL CLK CONNECTOR		
TCMOD			2	1	4	31B				DETECTOR		1.861.804.00
			2	1	7	31B				PLAYBACK AMPLIFIER		1.861.801.00
TCGUT			4	1	12	17A				RT/TC CDEEC		1.861.861.00
			4	1	19	18				CONNECTOR 4 (TC+AES+BNC)		
			4	1	20	17				CONNECTOR 5 (TC+EXT CLK)		
			4	3	7	2				TC OUTPUT (XLR)		
			4	3	10	4				TIME CODE I/O BOARD (CIS)		
			4	3	11	17				TC + EXTERNAL CLK CONNECTOR		
TCRCERR			4	1	8	24C				CODEC CONTROL		1.861.897.00
			4	1	10	21C				TRANSFORMER		1.861.899.00
TCY-4			4	1	8	22B				CODEC CONTROL		1.861.897.00
			4	1	10	22B				TRANSFORMER		1.861.899.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 175 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMNT NR.
TD-ADRO			11	20	42	24B				CAPSTAN INTERFACE	J03	1.820.777.00
			11	20	43	24B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	44	31				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	31				SPODLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	31				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	31				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-ADR1			11	20	42	23B				CAPSTAN INTERFACE	J03	1.820.777.00
			11	20	43	23B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	44	30				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	30				SPODLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	30				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	30				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-ADR2			11	20	43	22B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	44	29				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	29				SPODLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	29				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	29				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-ADR3			11	20	44	6				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	46	6				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	24				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-CAPSY			11	20	4	13				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	41	7				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	48	22A				MASTER SERIAL INTERFACE	J09	1.820.753.00
TD-CRES			11	20	41	26				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	43	6A				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
TD-C307K			11	20	5	7				SPODLING MOTOR SUPPLY	P05	
			11	20	46	22				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	31	3	7				FROM GRP20. ELM05	P02	
TD-C76K	9		1	79	1	4				POWER CONNECTOR (24 PIN MOLEX FEMALE)		
	9		1	79	2	4				POWER CONNECTOR (24 PIN MOLEX MALE)		
	9		11	19	1	4				FROM GRP32. ELM02	J01	
	9		11	19	2	4				TO GRP21. ELM02	P01	
			11	20	3	15				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	20	40	17				SPODLING MOTOR DRIVER	J01	1.820.759.00
			11	20	46	16				MP-UNIT TO CONTROL	J07	1.820.785.00
	9		11	20	62	15				WIRE FIELD		
	9		11	20	70	4				FROM GRP21. ELM01	J13	
			11	32	2	4				OUTPUT	P01	
			11	39	1	15				FROM GRP20. ELM03	P01	
TD-DATA0			11	20	42	32B				CAPSTAN INTERFACE	J03	1.820.777.00
			11	20	43	32B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	46	39				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	39				SPODLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	39				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	39				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 176 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TD-DATA1			11	20	42	31B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	31B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	38				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	38				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	38				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	38				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-DATA2			11	20	42	30B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	30B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	37				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	37				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	37				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	37				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-DATA3			11	20	42	29B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	29B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	36				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	36				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	36				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	36				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-DATA4			11	20	42	28B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	28B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	35				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	35				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	35				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	35				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-DATA5			11	20	42	27B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	27B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	34				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	34				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	34				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	34				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-DATA6			11	20	42	26B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	26B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	33				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	33				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	33				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	33				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-DATA7			11	20	42	25B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	25B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	32				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	32				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	32				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	32				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-ENB			11	20	42	21B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	43	21B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	44	28				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	45	28				SPOOLING MOTOR CONTROLLER	J06	1.82C.760.00
			11	20	46	28				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	28				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 177 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TD-HEACT			11	20	43	9B				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	20	48	20A				MASTER SERIAL INTERFACE	J09	1.82C.753.00
TD-ICRE1			11	20	44	9				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
TD-ICRE2			11	20	44	11				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
TD-ICRE3			11	20	44	16				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
TD-ICRE4			11	20	44	17				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
TD-ICRE5			11	20	44	23				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
TD-IRQ			11	20	42	13B				CAPSTAN INTERFACE	J03	1.82C.727.00
			11	20	44	13				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	46	13				MP-UNIT TD CONTROL	J07	1.82C.785.00
			11	20	47	12				TAPE DECK SERIAL INTERFACE	J08	1.82C.763.00
TD-MOVE			11	20	43	4A				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
TD-MOVE1			11	20	11	9				MOVE SENSOR	P11	
			11	20	44	7				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	45	1	9				FROM GRP20, ELM11	P01	
TD-MOVE2			11	20	11	8				MOVE SENSOR	P11	
			11	20	44	8				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	45	1	8				FROM GRP20, ELM11	P01	
TD-MVCLK			1	80	21	2				RACK-TAPE DECK (SERVO)(26 PIN FLAT)		
			11	20	4	15				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	16	23				PARALLEL REMOTE CONTROL	P16	
			11	20	32	2				TO ASSY1, GR80, EL21	P24	
			11	20	44	12				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
			11	20	48	25B				MASTER SERIAL INTERFACE	J09	1.82C.753.00
TD-MVDIR			11	27	2	23				FROM GRP20, ELM16	P02	
			1	80	21	4				RACK-TAPE DECK (SERVO)(26 PIN FLAT)		
			11	20	4	14				PAR. CONT. INT. SYNCHRONIZER	P04	
			11	20	16	24				PARALLEL REMOTE CONTROL	P16	
			11	20	32	4				TO ASSY1, GR80, EL21	P24	
			11	20	44	14				TAPE DECK COUNTER / TIMER	J05	1.82C.761.00
TD-NM1			11	20	48	25A				MASTER SERIAL INTERFACE	J09	1.82C.753.00
			11	27	2	24				FROM GRP20, ELM16	P02	
			11	20	46	9				MP-UNIT TD CONTROL	J07	1.82C.785.00
TD-PEN8L			11	20	40	23				SPOOLING MOTOR DRIVER	J01	1.82C.754.00
			11	20	43	20A				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
TD-PEN8R			11	20	40	15				SPOOLING MOTOR DRIVER	J01	1.82C.754.00
			11	20	43	21A				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
TD-PHENB			11	20	5	8				SPOOLING MOTOR SUPPLY	P05	
			11	20	43	10A				TAPE DECK PERIPHERY CONTR.	J04	1.82C.762.00
			11	31	3	8				FROM GRP20, ELM05	P02	

 * WILLI STUDDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 17A *
 * 1.861.022.JC D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLFMFNT NR.
TD-P14B			11	20	46	1				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-P15B			11	20	46	2				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-P16B			11	20	46	12				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-P17B			11	20	46	8				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-RALC1			11	20	7	14				TAPE LIFT MOTOR, LEFT	P07	
			11	20	43	18				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	46	1	14				FROM GRP20, ELM07	P01	
TC-RALC2			11	20	7	12				TAPE LIFT MOTOR, LEFT	P07	
			11	20	43	28				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	46	1	12				FROM GRP20, ELM07	P01	
TC-RALEN			11	20	7	15				TAPE LIFT MOTOR, LEFT	P07	
			11	20	43	1A				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	46	1	15				FROM GRP20, ELM07	P01	
TD-RALP1			11	20	7	11				TAPE LIFT MOTOR, LEFT	P07	
			11	20	43	3A				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	46	1	11				FROM GRP20, ELM07	P01	
TD-RALP2			11	20	7	13				TAPE LIFT MOTOR, LEFT	P07	
			11	20	43	2A				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	46	1	13				FROM GRP20, ELM07	P01	
TD-RARC1			11	20	8	14				TAPE LIFT MOTOR, RIGHT	P08	
			11	20	43	6B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	47	1	14				FROM GRP20, ELM08	P01	
TD-RARC2			11	20	8	12				TAPE LIFT MOTOR, RIGHT	P08	
			11	20	43	7B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	47	1	12				FROM GRP20, ELM08	P01	
TD-RAREN			11	20	8	15				TAPE LIFT MOTOR, RIGHT	P08	
			11	20	43	5B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	47	1	15				FROM GRP20, ELM08	P01	
TD-RARP1			11	20	8	11				TAPE LIFT MOTOR, RIGHT	P08	
			11	20	43	3B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	47	1	11				FROM GRP20, ELM08	P01	
TD-RARP2			11	20	8	13				TAPE LIFT MOTOR, RIGHT	P08	
			11	20	43	4B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	47	1	13				FROM GRP20, ELM08	P01	
TD-RES			11	20	42	19B				CAPSTAN INTERFACE	J03	1.820.727.00
			11	20	43	19B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	44	26				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	26				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	47	26				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-RESET			11	20	46	26				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	23				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00

 * WILLI STUDDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 17B *
 * 1.861.022.JC D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLFMFNT NR.
TD-RESMP			11	20	46	5				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	11				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-RW			11	20	42	20B				CAPSTAN INTERFACE	J03	1.820.727.00
			11	20	43	20B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	44	27				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	45	27				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	27				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	27				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-RX			11	20	46	10				MP-UNIT TO CONTROL	J07	1.820.785.00
TC-SHL0			11	20	6	8				EXT. SENSORS	P06	
			11	20	43	8A				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	44	1	8				FROM GRP20, ELM06	P01	
TC-SL2			11	20	46	4				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-SL3			11	20	43	14B				TAPE DECK PERIPHERY CONTR.	J04	1.820.762.00
			11	20	46	3				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-SL4			11	20	45	23				SPOOLING MOTOR CONTROLLER	J06	1.820.760.00
			11	20	46	23				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-SL5			11	20	46	24				MP-UNIT TO CONTROL	J07	1.820.785.00
			11	20	47	25				TAPE DECK SERIAL INTERFACE	J08	1.820.763.00
TD-SL6			11	20	44	25				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	20	46	25				MP-UNIT TO CONTROL	J07	1.820.785.00
TC-SL7			11	20	42	14B				CAPSTAN INTERFACE	J03	1.820.727.00
			11	20	46	15				MP-UNIT TO CONTROL	J07	1.820.785.00
TD-TCM1			11	20	3	8				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	20	41	1				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	18				CAPSTAN INTERFACE	J03	1.820.727.00
			11	38	1	8			F	FROM GRP39, ELM02	J01	
			11	39	1	8				FROM GRP20, ELM03	P01	
			11	39	2	8			M	TO GRP38, ELM01	P02	
TC-TCM2			11	20	3	10				CAPSTAN MOTOR DRIVE AMPLIFIER	P03	
			11	20	41	2				CAPSTAN CONTROL UNIT	J02	1.820.764.00
			11	20	42	28				CAPSTAN INTERFACE	J03	1.820.727.00
			11	38	1	11			F	FROM GRP39, ELM02	J01	
			11	39	1	10				FROM GRP20, ELM03	P01	
			11	39	2	11			M	TO GRP38, ELM01	P02	
TD-TML1			11	20	9	9				TACHO SENSOR (SPOOLING N. LEFT)	P09	
			11	20	44	1				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	36	1	9				TACHO SENSOR	P01	1.820.771.00
TD-TML2			11	20	9	8				TACHO SENSOR (SPOOLING N. LEFT)	P09	
			11	20	44	2				TAPE DECK COUNTER / TIMER	J05	1.820.761.00
			11	36	1	8				TACHO SENSOR	P01	1.820.771.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 180 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
TD-TMR1			11	20	10	9				TACHO SENSOR (SPOOLING M. RIGHT) P10		
			11	20	44	3				TAPE DECK COUNTER / TIMER J05		1.820.761.00
			11	37	1	9				TACHO SENSOR P01		1.820.771.00
TD-TMR2			11	20	10	8				TACHO SENSOR (SPOOLING M. RIGHT) P10		
			11	20	44	4				TAPE DECK COUNTER / TIMER J05		1.820.761.00
			11	37	1	8				TACHO SENSOR P01		1.820.771.00
TD-TRSP			11	20	6	9				EXT. SENSORS P06		
			11	20	43	9A				TAPE DECK PERIPHERY CONTR. J04		1.820.762.00
			11	44	1	9				FROM GRP20, ELM06 P01		
TD-TRSPR			11	20	6	10				EXT. SENSORS P06		
			11	44	1	10				FROM GRP20, ELM06 P01		
TD-TX			11	20	46	11				MP-UNIT TD CONTRCL J07		1.820.785.00
TD-YTRSP			11	20	6	7				EXT. SENSORS P06		
			11	44	1	7				FROM GRP20, ELM06 P01		
TCCEASY			4	1	9	24B				CODEC MEMORY		1.861.858.00
			4	1	10	21B				TRANSFORMATTER		1.861.859.00
TCMPRES			2	1	4	5A				DETECTOR		1.861.804.00
			2	1	6	5A				TAPE DECK MONITOR		1.861.802.00
TDPH01			2	4	2	4				INTERNAL PHONE CONNECTOR J2 (CIS)		1.861.802.00
			2	6	1	1				INTERNAL PHONE PLUG (SOLD.)		54.740.102.00
TDPH02			2	4	2	5				INTERNAL PHONE CONNECTOR J2 (CIS)		1.861.802.00
			2	6	1	2				INTERNAL PHONE PLUG (SOLD.)		54.740.102.00
TDS-CLK			11	20	30	2				SSCA INT. SYNCHRONIZER P20		
			11	20	47	17				TAPE DECK SERIAL INTERFACE J08		1.820.763.00
			11	20	48	19A				MASTER SERIAL INTERFACE J09		1.820.753.00
TDS-CTS			11	20	47	16				TAPE DECK SERIAL INTERFACE J08		1.820.763.00
			11	20	48	11B				MASTER SERIAL INTERFACE J09		1.820.753.00
TDS-DTR			11	20	47	15				TAPE DECK SERIAL INTERFACE J08		1.820.763.00
			11	20	48	11A				MASTER SERIAL INTERFACE J09		1.820.753.00
TDS-RX			11	20	47	13				TAPE DECK SERIAL INTERFACE J08		1.820.763.00
			11	20	48	10A				MASTER SERIAL INTERFACE J09		1.820.753.00
TDS-TX			11	20	47	14				TAPE DECK SERIAL INTERFACE J08		1.820.763.00
			11	20	48	10B				MASTER SERIAL INTERFACE J09		1.820.753.00
TDSPE1			2	4	1	1				INTERNAL SPEAKER CONNECTOR J1 (CIS)		1.861.802.00
			2	4	1	3				INTERNAL SPEAKER CONNECTOR J1 (CIS)		1.861.802.00
			2	5	1	1				INTERNAL SPEAKER (SOLD.)		71.010.108.00
TDSPLGND			2	4	1	2				INTERNAL SPEAKER CONNECTOR J1 (CIS)		1.861.802.00
			2	5	1	2				INTERNAL SPEAKER (SOLD.)		71.010.108.00
TEST1			4	1	12	12C				RT/TC CODEC		1.861.861.00

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 181 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
TFDRMENC			4	1	9	24A				CODEC MEMORY		1.861.858.00
			4	1	10	21A				TRANSFORMATTER		1.861.859.00
TIREFEXT			1	73	1	7				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.593.00
			1	80	14	7				BOX-RACK 1 TO REAR PANEL TD		
			1	80	21	14				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			4	1	13	16B				TIMING + TEST		1.861.862.00
			4	1	17	7				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	7				BOX-RACK 1 CONNECTOR (CABLE)		
			11	20	32	14				TO ASSY1, GRB0, FL21 P24		
		11	20	51	9B				MASTER SYSICON INTERFACE J12		1.861.721.00	
TIREFINT			1	73	1	6				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.593.00
			1	80	14	6				BOX-RACK 1 TO REAR PANEL TD		
			1	80	21	10				RACK-TAPE DECK (SERVO) (26 PIN FLAT)		
			4	1	10	10B				TRANSFORMATTER		1.861.859.00
			4	1	17	6				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	6				BOX-RACK 1 CONNECTOR (CABLE)		
			11	20	32	10				TO ASSY1, GRB0, FL21 P24		
		11	20	51	7B				MASTER SYSICON INTERFACE J12		1.861.721.00	
TL-A0			11	50	4	6				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	6				FROM GRP50, ELM04		
TL-C5			11	50	4	3				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	3				FROM GRP50, ELM04		
TL-D0			11	50	4	7				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	7				FROM GRP50, ELM04		
TL-D1			11	50	4	8				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	8				FROM GRP50, ELM04		
TL-D2			11	50	4	9				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	9				FROM GRP50, ELM04		
TL-D3			11	50	4	10				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	10				FROM GRP50, ELM04		
TL-D4			11	50	4	11				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	11				FROM GRP50, ELM04		
TL-D5			11	50	4	12				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	12				FROM GRP50, ELM04		
TL-D6			11	50	4	13				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	13				FROM GRP50, ELM04		
TL-D7			11	50	4	14				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	14				FROM GRP50, ELM04		
TL-ENB			11	50	4	4				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	4				FROM GRP50, ELM04		
TL-RESET			11	50	4	15				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	15				FROM GRP50, ELM04		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 182 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFNT NR.
TL-WR			11	50	4	5				CONNECTOR LCD DISPLAY UNIT	P04	
			11	52	1	5				FROM GRP50, ELMC4		
TM-A			11	50	2	2C				CONNECTOR COMMAND UNIT	P03	
			11	51	1	2C				FROM GRP50, ELMO2		
TM-ADRO			11	20	48	28B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	31				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	31				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	24A				MASTER SYSCON INTERFACE	J12	1.861.721.00
TM-ADR1			11	20	48	28A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	30				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	30				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	23A				MASTER SYSCON INTERFACE	J12	1.861.721.00
TM-ADR2			11	20	48	27B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	29				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	29				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	22A				MASTER SYSCON INTERFACE	J12	1.861.721.00
TM-ADR3			11	20	48	23B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	6				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	17				SMPTE/EBU INTERFACE	J11	1.820.751.00
TM-B			11	50	2	18				CONNECTOR COMMAND UNIT	P03	
			11	51	1	18				FROM GRP50, ELMO2		
TM-BUSSW			11	20	49	8				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	15				SMPTE/EBU INTERFACE	J11	1.820.751.00
TM-C			11	50	2	21				CONNECTOR COMMAND UNIT	P03	
			11	51	1	21				FROM GRP50, ELMO2		
TM-CUE1			11	48	1	20				FROM GRP50, ELMC3		
			11	48	2	5				CONNECTOR EDIT ASSEMBLY		
			11	49	1	5				FROM GRP48, ELMC2		
			11	50	3	20				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
TM-CUE2			11	48	1	22				FROM GRP50, ELMC3		
			11	48	2	7				CONNECTOR EDIT ASSEMBLY		
			11	49	1	7				FROM GRP48, ELMC2		
		11	50	3	22				CONNECTOR PUSHBUTTON ASSEMBLY	P02		
TM-C307K			11	20	49	22				MP-UNIT MASTER	J10	1.820.786.00
TM-C76K			11	20	49	16				MP-UNIT MASTER	J10	1.820.786.00
TM-D			11	50	2	22				CONNECTOR COMMAND UNIT	P03	
			11	51	1	22				FROM GRP50, ELMO2		
TM-DADRO			11	20	15	19				DISPLAY DRIVER	P15	
			11	20	16	19				PARALLEL REMOTE CONTROL	P16	
			11	20	48	8A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	19				FROM GRP20, ELM16	P02	
			11	50	1	19				FROM GRP20, ELM15	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 183 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFNT NR.
TM-DADR1			11	20	15	17				DISPLAY DRIVER	P15	
			11	20	48	7A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	50	1	17				FROM GRP20, ELM15	P01	
TM-DADR2			11	20	15	15				DISPLAY DRIVER	P15	
			11	20	48	6A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	50	1	15				FROM GRP20, ELM15	P01	
TM-DATA0			11	20	15	39				DISPLAY DRIVER	P15	
			11	20	16	39				PARALLEL REMOTE CONTROL	P16	
			11	20	48	32B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	39				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	39				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	32A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	39				FROM GRP20, ELM16	P02	
		11	50	1	39				FROM GRP20, ELM15	P01		
TM-DATA1			11	20	15	37				DISPLAY DRIVER	P15	
			11	20	16	37				PARALLEL REMOTE CONTROL	P16	
			11	20	48	32A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	38				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	38				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	31A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	37				FROM GRP20, ELM16	P02	
		11	50	1	37				FROM GRP20, ELM15	P01		
TM-DATA2			11	20	15	35				DISPLAY DRIVER	P15	
			11	20	16	35				PARALLEL REMOTE CONTROL	P16	
			11	20	48	31B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	37				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	37				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	30A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	35				FROM GRP20, ELM16	P02	
		11	50	1	35				FROM GRP20, ELM15	P01		
TM-DATA3			11	20	15	33				DISPLAY DRIVER	P15	
			11	20	16	33				PARALLEL REMOTE CONTROL	P16	
			11	20	48	31A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	36				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	36				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	29A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	33				FROM GRP20, ELM16	P02	
		11	50	1	33				FROM GRP20, ELM15	P01		
TM-DATA4			11	20	15	31				DISPLAY DRIVER	P15	
			11	20	16	31				PARALLEL REMOTE CONTROL	P16	
			11	20	48	30B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	35				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	35				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	28A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	31				FROM GRP20, ELM16	P02	
		11	50	1	31				FROM GRP20, ELM15	P01		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 184 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TM-DATA5			11	20	15	29				DISPLAY DRIVER	P15	
			11	20	16	29				PARALLEL REMOTE CONTROL	P16	
			11	20	48	30A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	34				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	34				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	27A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	29				FROM GRP20, ELM16	P02	
		11	50	1	29				FROM GRP20, ELM15	P01		
TM-DATA6			11	20	15	27				DISPLAY DRIVER	P15	
			11	20	16	27				PARALLEL REMOTE CONTROL	P16	
			11	20	48	29B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	33				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	33				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	26A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	27				FROM GRP20, ELM16	P02	
		11	50	1	27				FROM GRP20, ELM15	P01		
TM-DATA7			11	20	15	25				DISPLAY DRIVER	P15	
			11	20	16	25				PARALLEL REMOTE CONTROL	P16	
			11	20	48	29A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	32				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	32				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	25A				MASTER SYSCON INTERFACE	J12	1.861.721.00
			11	27	2	25				FROM GRP20, ELM16	P02	
		11	50	1	25				FROM GRP20, ELM15	P01		
TM-DENB			11	20	15	13				DISPLAY DRIVER	P15	
			11	20	16	13				PARALLEL REMOTE CONTROL	P16	
			11	20	48	5A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	13				FROM GRP20, ELM16	P02	
			11	50	1	13				FROM GRP20, ELM15	P01	
TM-DP			11	50	2	19				CONNECTER COMMAND UNIT	P03	
			11	51	1	19				FROM GRP50, ELM02		
TM-DREN8			11	20	49	12				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	12				SMPTE/EBU INTERFACE	J11	1.820.751.00
TM-DRES			11	20	15	9				DISPLAY DRIVER	P15	
			11	20	16	9				PARALLEL REMOTE CONTROL	P16	
			11	20	48	3A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	9				FROM GRP20, ELM16	P02	
			11	50	1	9				FROM GRP20, ELM15	P01	
TM-DRM			11	20	15	11				DISPLAY DRIVER	P15	
			11	20	16	11				PARALLEL REMOTE CONTROL	P16	
			11	20	48	4A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	11				FROM GRP20, ELM16	P02	
			11	50	1	11				FROM GRP20, ELM15	P01	
TM-DSL4			11	20	15	7				DISPLAY DRIVER	P15	
			11	20	48	1A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	50	1	7				FROM GRP20, ELM15	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 185 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TM-DSL5			11	20	16	7				PARALLEL REMOTE CONTROL	P16	
			11	20	48	2A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	7				FROM GRP20, ELM16	P02	
TM-D0			11	50	2	35				CONNECTER COMMAND UNIT	P03	
			11	51	1	35				FROM GRP50, ELM02		
TM-D1			11	50	2	34				CONNECTER COMMAND UNIT	P03	
			11	51	1	34				FROM GRP50, ELM02		
TM-D2			11	50	2	33				CONNECTER COMMAND UNIT	P03	
			11	51	1	33				FROM GRP50, ELM02		
TM-D3			11	50	2	32				CONNECTER COMMAND UNIT	P03	
			11	51	1	32				FROM GRP50, ELM02		
TM-D4			11	50	2	31				CONNECTER COMMAND UNIT	P03	
			11	51	1	31				FROM GRP50, ELM02		
TM-D5			11	50	2	30				CONNECTER COMMAND UNIT	P03	
			11	51	1	30				FROM GRP50, ELM02		
TM-D6			11	50	2	29				CONNECTER COMMAND UNIT	P03	
			11	51	1	29				FROM GRP50, ELM02		
TM-D7			11	50	2	28				CONNECTER COMMAND UNIT	P03	
			11	51	1	28				FROM GRP50, ELM02		
TM-D8			11	50	2	27				CONNECTER COMMAND UNIT	P03	
			11	51	1	27				FROM GRP50, ELM02		
TM-D9			11	50	2	26				CONNECTER COMMAND UNIT	P03	
			11	51	1	26				FROM GRP50, ELM02		
TM-E			11	50	2	24				CONNECTER COMMAND UNIT	P03	
			11	51	1	24				FROM GRP50, ELM02		
TM-ENB			11	20	48	27A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	28				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	28				SMPTE/EBU INTERFACE	J11	1.820.751.00
			11	20	51	21A				MASTER SYSCON INTERFACE	J12	1.861.721.00
TM-ENG			11	48	1	12				FROM GRP50, ELM03		
			11	48	2	4				CONNECTER EDIT ASSEMBLY		
			11	49	1	4				FROM GRP48, ELM02		
			11	49	2	2				WIRE FIELD		
			11	50	3	12				CONNECTER PUSHBUTTON ASSEMBLY	P02	
TM-EN1			11	50	2	9				CONNECTER COMMAND UNIT	P03	
			11	51	1	9				FROM GRP50, ELM02		
TM-EN2			11	50	2	8				CONNECTER COMMAND UNIT	P03	
			11	51	1	8				FROM GRP50, ELM02		
TM-EN3			11	50	2	7				CONNECTER COMMAND UNIT	P03	
			11	51	1	7				FROM GRP50, ELM02		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 186 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TM-EN4			11	50	2	6				CONNECTOR COMMAND UNIT	P03	
			11	51	1	6				FROM GRP50.ELM02		
TM-F			11	50	2	23				CONNECTOR COMMAND UNIT	P03	
			11	51	1	23				FROM GRP50.ELM02		
TM-G			11	50	2	25				CONNECTOR COMMAND UNIT	P03	
			11	51	1	25				FROM GRP50.ELM02		
TM-IAD0			11	20	15	20				DISPLAY DRIVER	P15	
			11	20	16	20				PARALLEL REMOTE CONTROL	P16	
			11	20	48	8B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	20				FROM GRP20. ELM16	P02	
			11	50	1	20				FROM GRP20. ELM15	P01	
TM-IAD1			11	20	15	18				DISPLAY DRIVER	P15	
			11	20	48	7B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	50	1	18				FROM GRP20. ELM15	P01	
TM-IAD2			11	20	15	18				DISPLAY DRIVER	P15	
			11	20	48	8B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	50	1	18				FROM GRP20. ELM15	P01	
TM-IENB			11	20	15	14				DISPLAY DRIVER	P15	
			11	20	16	14				PARALLEL REMOTE CONTROL	P16	
			11	20	48	5B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	14				FROM GRP20. ELM16	P02	
			11	50	1	14				FROM GRP20. ELM15	P01	
TM-IRES			11	20	15	10				DISPLAY DRIVER	P15	
			11	20	16	10				PARALLEL REMOTE CONTROL	P16	
			11	20	48	3B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	10				FROM GRP20. ELM16	P02	
			11	50	1	10				FROM GRP20. ELM15	P01	
TM-IR4			11	20	48	24B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	13				MP-UNIT MASTER	J10	1.820.786.00
TM-IRW			11	20	15	12				DISPLAY DRIVER	P15	
			11	20	16	12				PARALLEL REMOTE CONTROL	P16	
			11	20	48	4B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	12				FROM GRP20. ELM16	P02	
			11	50	1	12				FROM GRP20. ELM15	P01	
TM-ISL4			11	20	15	8				DISPLAY DRIVER	P15	
			11	20	48	1B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	50	1	8				FROM GRP20. ELM15	P01	
TM-ISL5			11	20	16	8				PARALLEL REMOTE CONTROL	P16	
			11	20	48	2B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	8				FROM GRP20. ELM16	P02	
TM-KBIR			11	20	15	23				DISPLAY DRIVER	P15	
			11	20	48	14B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	50	1	23				FROM GRP20. ELM15	P01	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 187 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMNT NR.
TM-L1			11	50	2	37				CONNECTOR COMMAND UNIT	P03	
			11	51	1	37				FROM GRP50.ELM02		
TM-L2			11	50	2	36				CONNECTOR COMMAND UNIT	P03	
			11	51	1	36				FROM GRP50.ELM02		
TM-L3			11	50	2	38				CONNECTOR COMMAND UNIT	P03	
			11	51	1	38				FROM GRP50.ELM02		
TM-NM1			11	20	49	9				MP-UNIT MASTER	J10	1.820.786.00
TM-P14B			11	20	49	1				MP-UNIT MASTER	J10	1.820.786.00
TM-P15B			11	20	49	2				MP-UNIT MASTER	J10	1.820.786.00
TM-REMR			11	20	16	21				PARALLEL REMOTE CONTROL	P16	
			11	20	48	19B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	27	2	21				FROM GRP20. ELM16	P02	
TM-RES			11	20	48	24A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	50	26				SNPT/EBU INTERFACE	J11	1.820.751.00
			11	20	51	19A				MASTER SYSDON INTERFACE	J12	1.861.721.00
TM-RESET			11	20	48	26A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	26				MP-UNIT MASTER	J10	1.820.786.00
TM-RES4P			11	20	48	23A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	5				MP-UNIT MASTER	J10	1.820.786.00
TM-RLO			11	50	2	12				CONNECTOR COMMAND UNIT	P03	
			11	51	1	12				FROM GRP50.ELM02		
TM-RL1			11	48	1	19				FROM GRP50. ELM03		
			11	48	2	6				CONNECTOR EDIT ASSEMBLY		
			11	49	1	6				FROM GRP48. ELM02		
			11	49	2	4				WIRE FIELD		
			11	50	2	13				CONNECTOR COMMAND UNIT	P03	
			11	50	3	19				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	13				FROM GRP50.ELM02		
TM-RL2			11	48	1	18				FROM GRP50. ELM03		
			11	50	2	14				CONNECTOR COMMAND UNIT	P03	
			11	50	3	18				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	14				FROM GRP50.ELM02		
TM-RL3			11	48	1	17				FROM GRP50. ELM03		
			11	50	2	15				CONNECTOR COMMAND UNIT	P03	
			11	50	3	17				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	15				FROM GRP50.ELM02		
TM-RL4			11	48	1	16				FROM GRP50. ELM03		
			11	50	2	16				CONNECTOR COMMAND UNIT	P03	
			11	50	3	16				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	16				FROM GRP50.ELM02		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 188 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	RFMARK	ELEMNT NR.
TM-RL5			11	48	1	15				FROM GRP50, ELM03		
			11	50	2	17				CONNECTOR COMMAND UNIT	P03	
			11	50	3	15				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	17				FROM GRP50, ELM02		
TM-RL6			11	48	1	14				FROM GRP50, ELM03		
			11	50	2	10				CONNECTOR COMMAND UNIT	P03	
			11	50	3	14				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	10				FROM GRP50, ELM02		
TM-RL7			11	48	1	13				FROM GRP50, ELM03		
			11	50	2	11				CONNECTOR COMMAND UNIT	P03	
			11	50	3	13				CONNECTOR PUSHBUTTON ASSEMBLY	P02	
			11	51	1	11				FROM GRP50, ELM02		
TM-RW			11	20	48	20B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	27				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	27				SMPT/E/EBU INTERFACE	J11	1.820.751.00
			11	20	51	20A				MASTER SYSCON INTERFACE	J12	1.861.721.00
TM-RX			11	20	49	10				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	10				SMPT/E/EBU INTERFACE	J11	1.820.751.00
TM-SEJR			11	20	48	20B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	50	13				SMPT/E/EBU INTERFACE	J11	1.820.751.00
TM-SH1R			11	20	15	21				DISPLAY DRIVER	P15	
			11	20	48	14A				MASTER SERIAL INTERFACE	J09	
			11	50	1	21				FROM GRP20, ELM15	P01	1.820.753.00
TM-SL2			11	20	48	22B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	4				MP-UNIT MASTER	J10	1.820.786.00
TM-SL3			11	20	49	3				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	16				SMPT/E/EBU INTERFACE	J11	1.820.751.00
TM-SL4			11	20	48	9A				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	23				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	23				SMPT/E/EBU INTERFACE	J11	1.820.751.00
TM-SL5			11	20	48	9B				MASTER SERIAL INTERFACE	J09	1.820.753.00
			11	20	49	24				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	24				SMPT/E/EBU INTERFACE	J11	1.820.751.00
TM-SL6			11	20	49	25				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	25				SMPT/E/EBU INTERFACE	J11	1.820.751.00
			11	20	51	14A				MASTER SYSCON INTERFACE	J12	1.861.721.00
TM-SL7			11	20	49	15			MP-UNIT MASTER	J10	1.820.786.00	
TM-TX			11	20	49	11				MP-UNIT MASTER	J10	1.820.786.00
			11	20	50	11				SMPT/E/EBU INTERFACE	J11	1.820.751.00
TR-A			11	25	1	3		B		CONN. AUTOLOCATOR, REMOTE TIMER	J01	
			11	26	2	5				TO GRP25, ELM01	P02	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * PAGE 189 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	RFMARK	ELEMNT NR.
TR-B			11	25	1	3		B		CONN. AUTOLOCATOR, REMOTE TIMER	J01	
			11	26	2	4				TO GRP25, ELM01	P02	
TRACK11			1	80	3	18C				PDM DEMODULATOR 1		1.861.812.00
			1	80	4	18A				PDM DEMODULATOR 2		1.861.812.00
			1	80	6	19C				ANALOG ROUTING		1.861.814.00
TRACK12			1	80	3	18A				PDM DEMODULATOR 1		1.861.812.00
			1	80	6	19A				ANALOG ROUTING		1.861.814.00
TRANSA			11	20	31	3				TO GRP25, ELM04/05	P21	
			11	20	50	3				SMPT/E/EBU INTERFACE	J11	1.820.751.00
			11	25	4	2		B		CONNECTOR SMPT/E/EBU BUS	J04	
			11	25	5	2		B		CONNECTOR SMPT/E/EBU BUS	J05	
TRANSB			11	20	31	4				TO GRP25, ELM04/05	P21	
			11	20	50	4				SMPT/E/EBU INTERFACE	J11	1.820.751.00
			11	25	4	7		B		CONNECTOR SMPT/E/EBU BUS	J04	
			11	25	5	7		B		CONNECTOR SMPT/E/EBU BUS	J05	
TRANSCH			11	20	31	2				TO GRP25, ELM04/05	P21	
			11	20	50	2				SMPT/E/EBU INTERFACE	J11	1.820.751.00
			11	25	4	6		B		CONNECTOR SMPT/E/EBU BUS	J04	
			11	25	5	6		B		CONNECTOR SMPT/E/EBU BUS	J05	
TREFEXT			1	73	1	20				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	14	20				BOX-RACK 1 TO REAR PANEL TD		
			1	80	21	12				RACK-TAPE DECK (SERVO)(26 PIN FLAT)		
			4	1	13	16A				TIMING + TEST		1.861.862.00
			4	1	17	20				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	20				BOX-RACK 1 CONNECTOR (CABLE)		
			11	20	32	12				TO ASSY1, GR80, EL21	P24	
			11	20	51	8B				MASTER SYSCON INTERFACE	J12	1.861.721.00
TREFINT			1	73	1	19				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	14	19				BOX-RACK 1 TO REAR PANEL TD		
			1	80	21	8				RACK-TAPE DECK (SERVO)(26 PIN FLAT)		
			4	1	10	10A				TRANSFORMER		1.861.859.00
			4	1	17	19				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	19				BOX-RACK 1 CONNECTOR (CABLE)		
			11	20	32	8				TO ASSY1, GR80, EL21	P24	
			11	20	51	6B				MASTER SYSCON INTERFACE	J12	1.861.721.00
TRENTST			1	80	1	8C				CUE/PC DELAY		1.861.816.00
TR11			4	1	13	13C				TIMING + TEST		1.861.862.00
TSTSIFRD			4	1	14	4B				SYSTEM CONTROLLER 1		1.861.743.00
			4	1	15	4B				SYSTEM CONTROLLER 2		1.861.743.00
			4	1	21	2				CONNECTOR 6 (TERMINAL)		
			4	3	12	2				TEST (TERMINAL) (RS232)		
TSTSIFTD			4	1	14	4A				SYSTEM CONTROLLER 1		1.861.743.00
			4	1	15	4A				SYSTEM CONTROLLER 2		1.861.743.00
			4	1	21	3				CONNECTOR 6 (TERMINAL)		
			4	3	12	3				TEST (TERMINAL) (RS232)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 190 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFNT NR.
TTIXLOOP			4	1	10	13A				TRANSFORMATTER		1.861.859.00
			4	1	12	7A				RT/TC CDEEC		1.861.861.00
			4	1	13	13A				TIMING + TEST		1.861.862.00
TTROEMPH			4	1	10	12C				TRANSFORMATTER		1.861.859.00
			4	1	13	12C				TIMING + TEST		1.861.862.00
TTREC			4	1	10	13B				TRANSFORMATTER		1.861.859.00
			4	1	13	13B				TIMING + TEST		1.861.862.00
TTWREMPH			4	1	10	12B				TRANSFORMATTER		1.861.859.00
			4	1	13	12B				TIMING + TEST		1.861.862.00
UREC			2	1	4	24A				DETECTOR		1.861.804.00
			2	1	5	24C				WRITE AMPLIFIER		1.861.803.00
VCLKIN			4	1	13	7A				TIMING + TEST		1.861.862.00
			4	1	19	23				CONNECTOR 4 (TC+AES+BNC)		
			4	3	15	1				VIDEO CLCK INPUT (BNC)		
			4	3	26	1				BNC INTERCONNECTION (CIS)		1.861.776.00
VIDCLK			4	1	13	9A				TIMING + TEST		1.861.862.00
			4	1	20	16				CONNECTOR 5 (TC+EXT CLK)		
			4	3	11	16				TC + EXTERNAL CLK CONNECTOR		
VICICLK			4	1	13	9B				TIMING + TEST		1.861.862.00
			4	1	20	3				CONNECTOR 5 (TC+EXT CLK)		
			4	3	11	3				TC + EXTERNAL CLK CONNECTOR		
WCKI			4	1	13	7C				TIMING + TEST		1.861.862.00
			4	1	19	22				CONNECTOR 4 (TC+AES+BNC)		
			4	3	14	1				CLOCK INPUT (BNC)		
			4	3	26	4				BNC INTERCONNECTION (CIS)		1.861.776.00
WCIIN			4	1	13	10B				TIMING + TEST		1.861.862.00
			4	1	20	2				CONNECTOR 5 (TC+EXT CLK)		
			4	3	11	2				TC + EXTERNAL CLK CONNECTOR		
WCIN			4	1	13	10A				TIMING + TEST		1.861.862.00
			4	1	20	15				CONNECTOR 5 (TC+EXT CLK)		
			4	3	11	15				TC + EXTERNAL CLK CONNECTOR		
WRCLK4			1	73	3	15				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	15				REAR PANEL TC (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	19A				WRITE AMPLIFIER		1.861.803.00
			4	1	10	7A				TRANSFORMATTER		1.861.859.00
			4	1	18	15				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	15				BOX-RACK 3 CONNECTOR (CABLE)		
WRDOUT			1	73	3	16				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	16				REAR PANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	18A				WRITE AMPLIFIER		1.861.803.00
			4	1	10	8A				TRANSFORMATTER		1.861.859.00
			4	1	18	16				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	16				BOX-RACK 3 CONNECTOR (CABLE)		

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 191 *
 * 1.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	FLEMFNT NR.
WRICKL4			1	73	3	2				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	2				REAR PANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	19C				WRITE AMPLIFIER		1.861.803.00
			4	1	10	7B				TRANSFORMATTER		1.861.859.00
			4	1	18	2				CONNECTOR 3 (BACKPANEL RACK 3)		
WRIDOUT			1	73	3	3				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	3				REAR PANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	18C				WRITE AMPLIFIER		1.861.803.00
			4	1	10	8B				TRANSFORMATTER		1.861.859.00
			4	1	18	3				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	3				BOX-RACK 3 CONNECTOR (CABLE)		
WRISYO			1	73	3	4				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	4				REAR PANEL TD (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	17C				WRITE AMPLIFIER		1.861.803.00
			4	1	10	9B				TRANSFORMATTER		1.861.859.00
			4	1	18	4				CONNECTOR 3 (BACKPANEL RACK 3)		
			4	1	52	4				BOX-RACK 3 CONNECTOR (CABLE)		
WRITR1			1	73	1	8				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	12	6				RACK-CAGE (25 PIN D-SUB)		
			1	80	14	8				BOX-RACK 1 TO REAR PANEL TD		
			2	1	3	6				BACKPANEL RACK (D-SUB 25P)		1.861.895.00
			2	1	5	2C				WRITE AMPLIFIER		1.861.803.00
			4	1	12	11B				RT/TC CDEEC		1.861.861.00
			4	1	17	8				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	8				BOX-RACK 1 CONNECTOR (CABLE)		
WRITR11			1	80	1	4C				CUE/PG DELAY		1.861.814.00
			1	80	2	4C				PDM MODULATOR		1.861.811.00
			1	80	3	6C				PDM DEMODULATOR 1		1.861.812.00
			1	80	12	8				RACK-CAGE (25 PIN D-SUB)		
			2	1	3	8				BACKPANEL RACK (D-SUB 25P)		1.861.895.00
			2	1	5	4C				WRITE AMPLIFIER		1.861.803.00
WRITR12			1	80	2	5C				PDM MODULATOR		1.861.811.00
			1	80	3	10C				PDM DEMODULATOR 1		1.861.812.00
			1	80	4	6C				PDM DEMODULATOR 2		1.861.812.00
			1	80	12	9				RACK-CAGE (25 PIN D-SUB)		
			2	1	3	9				BACKPANEL RACK (D-SUB 25P)		1.861.895.00
			2	1	5	5C				WRITE AMPLIFIER		1.861.803.00
WRITR2			1	73	1	9				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	12	7				RACK-CAGE (25 PIN D-SUB)		
			1	80	14	9				BOX-RACK 1 TO REAR PANEL TD		
			2	1	3	7				BACKPANEL RACK (D-SUB 25P)		1.861.895.00
			2	1	5	3C				WRITE AMPLIFIER		1.861.803.00
			4	1	12	9B				RT/TC CDEEC		1.861.861.00
			4	1	17	9				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	9				BOX-RACK 1 CONNECTOR (CABLE)		

 * WILLI STUDBR AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 192 *
 * L.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
WRSYC			1	73	3	17				BOX-RACK 3 (CAGE) (25 PIN D-SUB)		1.861.583.00
			2	1	1	17				REARPANEL TO (BOX) (D-SUB 25P)		1.861.895.00
			2	1	5	17A				WRITE AMPLIFIER		1.861.803.00
			4	1	10	9A				TRANSFORMER		1.861.895.00
			4	1	18	17				CONNECTOR 3 (BACKPANEL RACK 3)		
WRTOUT1			2	2	1	1				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	1				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT10			2	2	1	19				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	19				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT11			2	2	1	23				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	23				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT12			2	2	1	25				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	25				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT2			2	2	1	3				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	3				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT3			2	2	1	5				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			3	2	1	5				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT4			2	2	1	7				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	7				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT5			2	2	1	9				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	9				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT6			2	2	1	11				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	11				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT7			2	2	1	13				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	13				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT8			2	2	1	15				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	15				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTOUT9			2	2	1	17				HEADBLOCK WRITE (P4) (D-SUB 25P)		1.861.803.00
			5	2	1	17				HEADBLOCK CONNECTOR WRITE (P4)		1.116.861.10
WRTR1			1	73	1	21				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	12	18				RACK-CAGE (25 PIN D-SUB)		
			1	80	14	21				BOX-RACK 1 TO REAR PANEL TO		
			2	1	3	18				BACKPANEL RACK (D-SUB 25P)		1.861.895.00
			2	1	5	2A				WRITE AMPLIFIER		1.861.803.00
			4	1	12	11A				RT/TC CCDEC		1.861.861.00
			4	1	17	21				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	21				BOX-RACK 1 CONNECTOR (CABLE)		
WRTR10			2	1	4	9A				DETECTOR		1.861.804.00
			2	1	5	9C				WRITE AMPLIFIER		1.861.803.00

 * WILLI STUDBR AG * S I G N A L W I R E L I S T * 86/12/08 * 10:54 * P A G E 193 *
 * L.861.022.00 D820X PCM RECORDER * 86/08/27 - 00 *

SIGNAL NAME	COLOR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
WRTR11			1	80	1	6A				CUE/PG DELAY		1.861.816.00
			1	80	2	4A				PDM MODULATOR		1.861.811.00
			1	80	3	6A				PDM DEMODULATOR 1		1.861.812.00
			1	80	12	20				RACK-CAGE (25 PIN D-SUB)		1.861.895.00
			2	1	3	20				BACKPANEL RACK (D-SUB 25P)		1.861.803.00
WRTR12			1	80	2	5A				PDM MODULATOR		1.861.811.00
			1	80	3	10A				PDM DEMODULATOR 1		1.861.812.00
			1	80	4	6A				PDM DEMODULATOR 2		1.861.812.00
			1	80	12	21				RACK-CAGE (25 PIN D-SUB)		1.861.895.00
			2	1	3	21				BACKPANEL RACK (D-SUB 25P)		1.861.803.00
WRTR2			1	73	1	22				BOX-RACK 1 (RACK) (25 PIN D-SUB)		1.861.583.00
			1	80	12	19				RACK-CAGE (25 PIN D-SUB)		
			1	80	14	22				BOX-RACK 1 TO REAR PANEL TO		
			2	1	3	19				BACKPANEL RACK (D-SUB 25P)		1.861.895.00
			2	1	5	3A				WRITE AMPLIFIER		1.861.803.00
			4	1	12	9A				RT/TC CCDEC		1.861.861.00
			4	1	17	22				CONNECTOR 2 (BACKPANEL RACK 1)		
			4	1	50	22				BOX-RACK 1 CONNECTOR (CABLE)		
WRTR3			2	1	4	6C				DETECTOR		1.861.804.00
			2	1	5	6A				WRITE AMPLIFIER		1.861.803.00
WRTR4			2	1	4	6A				DETECTOR		1.861.804.00
			2	1	5	6C				WRITE AMPLIFIER		1.861.803.00
WRTR5			2	1	4	7C				DETECTOR		1.861.804.00
			2	1	5	7A				WRITE AMPLIFIER		1.861.803.00
WRTR6			2	1	4	7A				DETECTOR		1.861.804.00
			2	1	5	7C				WRITE AMPLIFIER		1.861.803.00
WRTR7			2	1	4	8C				DETECTOR		1.861.804.00
			2	1	5	8A				WRITE AMPLIFIER		1.861.803.00
WRTR8			2	1	4	8A				DETECTOR		1.861.804.00
			2	1	5	8C				WRITE AMPLIFIER		1.861.803.00
WRTR9			2	1	4	9C				DETECTOR		1.861.804.00
			2	1	5	9A				WRITE AMPLIFIER		1.861.803.00
WG			4	1	10	14A				TRANSFORMER		1.861.895.00
W1			4	1	10	14B				TRANSFORMER		1.861.895.00
C.O VCU			11	20	15	22				DISPLAY DRIVER	P15	
			11	20	15	24				DISPLAY DRIVER	P15	
			11	20	15	26				DISPLAY DRIVER	P15	
			11	20	15	28				DISPLAY DRIVER	P15	
			11	20	15	30				DISPLAY DRIVER	P15	
			11	20	15	32				DISPLAY DRIVER	P15	
			11	20	15	34				DISPLAY DRIVER	P15	

 * WILLI STUDER AG * S I G N A L W I R E L I S T * 06/12/08 * 10:54 * P A G E 194 *
 * 1.861.022.00 D820X PCM RECORDER * R6/08/27 - 00 *****

SIGNAL NAME	CCLGR	MI	ASY	GRP	ELM	PNT	S	LV	TYPE	DESCRIPTION OF ELEMENT	REMARK	ELEMENT NR.
<<-- CONT.GF Q.3 VCU			11	20	15	36				DISPLAY DRIVER	P15	
			11	20	15	38				DISPLAY DRIVER	P15	
			11	20	15	40				DISPLAY DRIVER	P15	
			11	20	16	16				PARALLEL REMOTE CONTROL	P16	
			11	20	16	22				PARALLEL REMOTE CONTROL	P16	
			11	20	16	26				PARALLEL REMOTE CONTROL	P16	
			11	20	16	28				PARALLEL REMOTE CONTROL	P16	
			11	20	16	30				PARALLEL REMOTE CONTROL	P16	
			11	20	16	32				PARALLEL REMOTE CONTROL	P16	
			11	20	16	34				PARALLEL REMOTE CONTROL	P16	
			11	20	16	36				PARALLEL REMOTE CONTROL	P16	
			11	20	16	38				PARALLEL REMOTE CONTROL	P16	
			11	20	16	40				PARALLEL REMOTE CONTROL	P16	
			11	27	2	16				FROM GRP20, ELM16	P02	
			11	27	2	22				FROM GRP20, ELM16	P02	
			11	27	2	26				FROM GRP20, ELM16	P02	
			11	27	2	28				FROM GRP20, ELM16	P02	
			11	27	2	30				FROM GRP20, ELM16	P02	
			11	27	2	32				FROM GRP20, ELM16	P02	
			11	27	2	34				FROM GRP20, ELM16	P02	
			11	27	2	36				FROM GRP20, ELM16	P02	
			11	27	2	38				FROM GRP20, ELM16	P02	
			11	27	2	40				FROM GRP20, ELM16	P02	
			11	50	1	22				FROM GRP20, ELM15	P01	
			11	50	1	24				FROM GRP20, ELM15	P01	
			11	50	1	26				FROM GRP20, ELM15	P01	
			11	50	1	28				FROM GRP20, ELM15	P01	
			11	50	1	30				FROM GRP20, ELM15	P01	
			11	50	1	32				FROM GRP20, ELM15	P01	
			11	50	1	34				FROM GRP20, ELM15	P01	
		11	50	1	36				FROM GRP20, ELM15	P01		
		11	50	1	38				FROM GRP20, ELM15	P01		
		11	50	1	40				FROM GRP20, ELM15	P01		
QCAPMOT	4		1	79	1	23				POWER CONNECTOR (24 PIN MOLEX FEM)		
	4		1	79	2	23				POWER CONNECTOR (24 PIN MOLEX MALE)		
	4		11	11	3	4			L	RECTIFIER	D203	70.01.0231
	4		11	12	4	2			L	CAPACITOR	C04	59.26.7103
	4		11	12	5	9			M	CONNECTOR TO GRP32, ELMC1	P01	
	4		11	19	1	23			F	FROM GRP32, ELMC2	J01	
	4		11	19	2	23			M	TO GRP21, ELM02	P01	
	4		11	20	62	8			L	WIRE FIELD		
	4		11	20	62	9			L	WIRE FIELD		
	4		11	20	70	23			F	FROM GRP21, ELMC1	J13	
2ECCLK	4		1	5	25C					TO CAPSTAN MOTOR DRIVE AMP.		
	4		11	32	1	9			F	INPUT FROM GRP12, ELM05	J01	
	4		11	32	2	23			M	OUTPUT	P01	
	4		11	39	3	1			M	FROM GRP20, ELM71	P03	
	4		1	13	17A					CAPRO INTERFACE TIMING + TEST		1.861.854.00 1.861.862.00