



## side A capacitors r/w board Philips DCC900

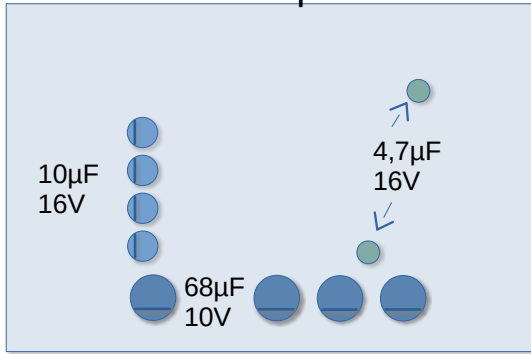

### Read Write P.C.B.:

C103: 4.7uF 16V **Bipolar**  
 C112: 10uF 16V  
 C119: 10uF 16V  
 C120: 10uF 16V  
 C121: 10uF 16V  
 C135: 68uF 10V  
 C137: 68uF 10V  
 C140: 68uF 16V  
 C150: 68uF 10V  
 C143: 4.7uF 16V **Bipolar**

## side A capacitors digital board Philips DCC900

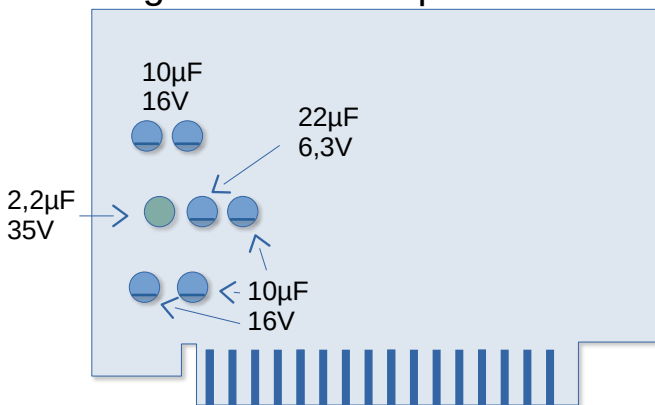

### Digital P.C.B.:

C423: 10uF 16V  
 C424: 22uF 6.3V  
 C426: 2.2uF 50V **Bipolar** (35V on my board)  
 C429: 10uF 16V  
 C431: 10uF 16V  
 C447: 10uF 16V  
 C450: 10uF 16V

### Summary:

2,2µF/35V/BP - 1 - Nichicon UMP1V2R2MDD  
 4,7µF/16V/BP - 2 - Nichicon UMP1C4R7MDD  
 10µF/16V - 9 - Nichicon UMV1C100MFD  
 22µF/6V3 - 1 - Nichicon UMV0J220MFD  
 68µF/10V - 4 - Panasonic EEA-GA1A680

V1.0

[www.reeltoreel.nl](http://www.reeltoreel.nl) Philip van der Matten

Btw some of these parts are discontinued atm.